



PFR-100M/100L

Fanless Multi-Range D.C. Power Supply

FEATURES

- Constant Power Output for 5 Times Multi-range(V&I) Operation
- Natural Convection Cooling Design(Fanless Structure)
- Preset Memory Function
- Output ON/OFF Delay Function
- CV, CC Priority Mode
- Adjustable Slew Rate For Voltage and Current
- Bleeder Circuit Control
- Protection : OVP, OCP, AC FAIL and OTP
- Support Front Panel and Rear Panel Output
- Built-in USB and RS-232/485 Interface Optional LAN+GPIB
- Web Server Monitoring and Control
- External Analog Control and Monitor Function
- Remote Sensing Function


The PFR-100 series, a small and high-performance programmable D.C. power supply, adopts natural convection design to dissipate heat. The fanless structure allows users to focus on their experiments and tests in a quiet environment. Fanless power supply will not suck in dust and foreign objects, therefore, PFR-100 series has a longer life cycle compared with that of power supplies with fan.

The PFR-100 series is a power supply with a five-fold rated power that allows users to self-define voltage and current under rated power conditions so as to satisfy them with wider voltage and current operational ranges. PFR-100 series, with rated 100W, provides two models: PFR-100L- maximum output voltage of 50V (at 2A) or maximum output current of 10A (at 10V); PFR-100M- maximum output voltage of 250V (at 0.4A) or maximum output current of 2A (at 50V).

The PFR-100 series provides front and rear panel output terminals. The front panel output terminal helps users shorten test lead replacement time while conducting adjustment on front panel's function keys. The rear panel output terminal facilitates an easy wiring operation for rackmount assembly. 3U height, 70mm width and 2.5KG in weight have greatly elevated PFR-100 series portability. Furthermore, the multi-drop mode allows users to control up to 31 PFR-100 series without using switch/Hub that help users save the equipment cost.


The LAN interface for PFR-100 is Ethernet port. PFR-100 also has a built-in web server and intuitive user interface. Users, via general browsers including Internet Explorer, Mozilla Firefox or Android cellular phones, can monitor PFR-100's test and measurement anywhere. Users not only can remotely monitor PFR-100 via internet, but also remotely observe and adjust their operating PFR-100s in the lab from your home. The outputs of PFR-100 series can be monitored including OVP, OCP, UVL; and the system information can be checked such as unit's serial number, firmware edition and internet setting. Users can remotely adjust PFR-100 settings, including output voltage/current, the slew rate for voltage/current, Bleeder circuit control, OCP, delayed time for output voltage and Buzzer settings.

The PFR-100 series provides special functionalities to meet test requirements for different load's characteristics. The CC priority mode can be applied for DUTs with diode characteristics to prevent DUT from being damaged by inrush current. A slow rise time for voltage can also protect DUT from inrush current, especially for tests on capacitive load. When power is off or load is disconnected, the activation of Bleeder circuit control will allow the bleeder resistor to consume filter capacitor's electricity. Without the bleed resistor, power supply's filter capacitor may still have electricity that is a potential hazard. For automatic testing equipment systems, the bleeder resistor allows PFR-100 series to rapidly discharge to prepare itself for the next operation.

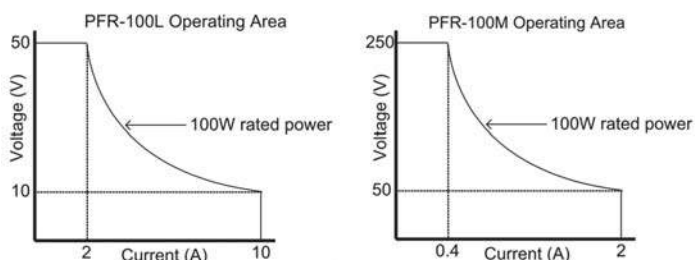


Model	PFR-100L	PFR-100M
Output Channel	1	1
Output Voltage	0~ 50V	0~ 250V
Output Current	0~ 10A	0~ 2A
Rated Power	100W	100W

A. C.V/C.C PRIORITY MODE



Under the conventional C.V mode, inrush current and surge voltage appeared at forward voltage (V_f) of LED


Under the application conditions of diode load, conventional power supplies under the C.V priority mode will produce inrush current and surge voltage at turn-on. The PFR-100 series has




Under C.C priority mode, inrush and surge voltage are effectively restrained.

C.V and C.C priority modes. The C.C priority mode can prevent inrush current and surge voltage from occurring at turn-on to protect DUT.

B ADJUSTABLE SLEW RATE



Adjustable Voltage Slew Rate



Adjustable Current Slew Rate


Voltage Slew Rate
0.1V~100.0V/sec (PFR-100L)
0.1V~500.0V/sec (PFR-100M)

Current Slew Rate
0.01A~20.00A/sec (PFR-100L)
0.001A~4.000A/sec (PFR-100M)

The PFR-100 series can adjust slew rate for current and voltage. Via setting the rise and fall time of voltage and current, users can verify DUT's characteristics during voltage and current variation. Additionally, slew rate adjustment can mitigate voltage shift to

effectively prevent DUT from being damaged by inrush current. This function is ideal for tests such as capacitive load and motor.


C WEB SERVER REMOTE CONTROL FUNCTION

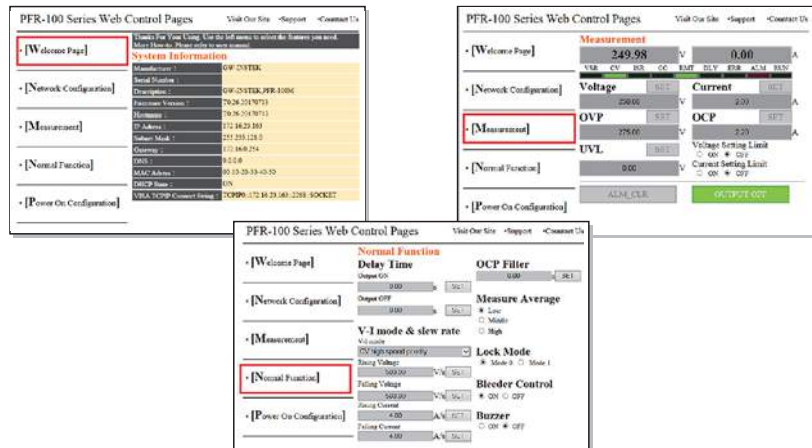

Users, via general browsers including Internet Explorer, Mozilla Firefox or Android cellular phones, can monitor PFR-100's test and measurement anywhere. Users not only can remotely monitor PFR-100 via internet, but also remotely observe and adjust your operating PFR-100 in the lab from your home. The outputs of PFR-100 can be monitored including OVP, OCP, UVL; and system

information can be checked such as unit's serial number, firmware edition and internet setting. Users can remotely adjust PFR-100 settings, including output voltage/current, the slew rate for voltage/current, Bleed circuit control, OCP, delayed time for output voltage and Buzzer settings.

D BLEEDER CIRCUIT CONTROL

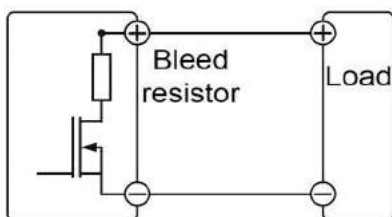


PFR-100 Series Bleeder Circuit

The PFR-100 series power supply has a bleeder circuit control which is in parallel with the output terminal. When power is off or load is disconnected, the bleed resistor will consume electricity from the filter capacitor. Without a bleed resistor, the filter capacitor of power could still be charged with electricity that poses a potential danger. In addition, for ATE system, bleed resistor allows the PFR-100 series to bleed current rapidly so as to prepare itself for the next operation.

E

REMOTE PROGRAM CONTROL (UP TO 31 UNITS CONNECTION)

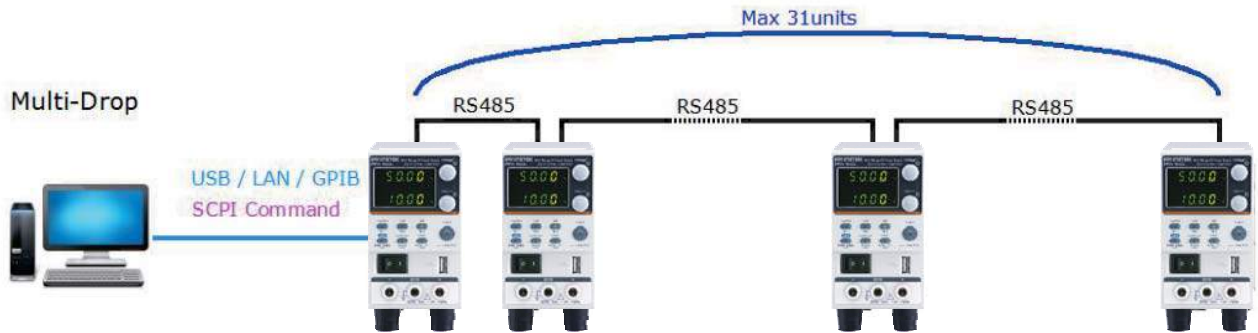


Provide USB, GPIB and LAN for PC to remote control Master PFR-100. RJ-45 connector on the rear panel can connect up to 31 units. LAN or USB remote control and augmenting slave

units by using the multi-drop mode will no longer need any switch/hub that can help customers save equipment costs.


F

EXTERNAL ANALOG CONTROL FUNCTION




Pin16 → EXT-V (+)
Pin15 → EXT-V (-)
Wire shield → negative (-) output terminal

External Voltage Controls
Voltage Range



Pin16 → EXT-R
Pin15 → EXT-R
Wire shield → negative (-) output terminal

External Resistance Controls
Voltage Range



Pin14 → Switch
Pin13 → Switch
Wire shield → negative (-) output terminal


External ON-OFF To Control
Output, ON or OFF

The rear panel of the PFR-100 series has an analog control terminal. The external analog control interface allows external voltage or resistance to control voltage and current output; and allows power supply to output or to be turned on and off.

The diagram above shows typical connection methods for external control applications. For more detailed connection information please refer to user manual.

G

OUTPUT ON/OFF DELAY

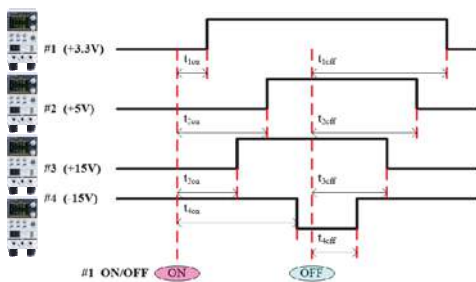

An Example of Output On/Off Delay Control Among Multiple Outputs of the PFR-100 units

The Output On/Off delay feature enables the setting of a specific time delay for output on after the power supply output is turned on, and a specific time delay for output off after the power supply output is turned off. When multiple PFR-100 units are used, the On/Off delay time of each unit can be set respectively referring to fix time points. This multiple-output control can be done through the analog control terminal at rear panel or through the PC programming with standard commands.

H

USING THE RACK MOUNT KIT



GRA-431-E (EIA) Rack Mount Kit



GRA-431-J (JIS) Rack Mount Kit

The Rack Mount Kits of the PFR-100 Series support both EIA and JIS standards. A standard rack can accommodate 5 units of PFR-100.


PANEL INTRODUCTION




PFR-100L Front Panel



PFR-100M Front Panel

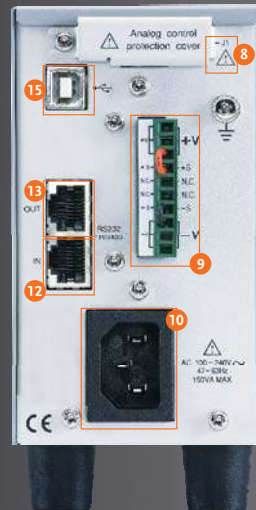

PFR-100L Rear Panel

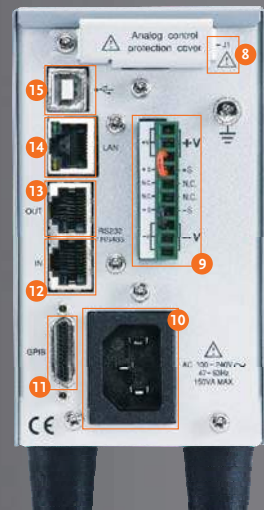

PFR-100M Rear Panel

1. Voltage Knob
2. Current Knob
3. Output Button
4. USB Type A Connector
5. Front Panel Output Terminal
6. Power Switch
7. Display Area
8. Analog Control Interface

9. Rear Panel Output Terminal
10. AC Input
11. GPIB Connector (Factory Installed Options)
12. Remote Serial In Connector
13. Remote Serial Out Connector
14. LAN Connector (Factory Installed Options)
15. USB Type B Connector

OPTIONAL ASSESSORIES

PSU-232

Rs232 Cable with Db9 connector kit



GTL-104A

test lead(for PFR-100L only)



GTL-258

GPIB Cable, 2000mm



GTL-134

test lead



PSU-485

Rs485 Cable with Db9 connector kit



GTL-105A

test lead(for PFR-100M only)



GTL-246

USB Cable (USB 2.0 Type A-TypeB Cable)



SPECIFICATIONS			
	Model	PFR-100L	PFR-100M
OUTPUT RATING	Rated Output Voltage	50V	250V
	Rated Output Current	10A	2A
	Rated Output Power	100W	100W
REGULATION(CV)	Load Regulation (*2)	10mV	33mV
	Line Regulation (*1)	3mV	5mV
REGULATION(CC)	Load Regulation (*9)	10mA	3.2mA
	Line Regulation (*1)	8mA	1.2mA
RIPPLE & NOISE (*3)	Vp-p (*4)	50mV	150mV
	Vr.m.s.(*5)	4mV	15mV
	A r.m.s.	10mA	2mA
PROGRAMMING ACCURACY	Voltage	0.1% of setting +	40mV
	Current	0.2% of setting +	20mA
MEASUREMENT ACCURACY	Voltage	0.1% of reading +	40mV
	Current	0.2% of reading +	20mA
RESPONSE TIME	Rise Time (*6)	Rated load	50ms
	Fall Time (*7)	Rated load	100ms
	Transient Response Time (*8)	No load	500ms
PROGRAMMING RESOLUTION	Voltage		100ms
	Current		200ms
MEASUREMENT RESOLUTION	Voltage		1000ms
	Current		2ms
PROTECTION FUNCTION	Over Voltage Protection (OVP)	Setting range	5~55V
	Over Current Protection (OCP)	Setting range	1~11A
	Under Voltage Limit (UVL)	Setting range	0~52.5V
	Over Temperature Protection (OTP)	Operation	Turn the output off.
	Low AC Input Protection (AC-Fail)	Operation	Turn the output off.
	Power Limit (Power Limit)	Operation	Turn the output off.
FRONT PANEL DISPLAY ACCURACY, 4 DIGITS	Voltage	0.1% of reading +	40mV
	Current	0.2% of reading +	20mA
ENVIRONMENT CONDITION	Operating Temperature	0 °C to 40 °C	
	Storage Temperature	-20 °C to 70 °C	
	Operating Humidity	20% to 80% RH; No condensation	
	Storage Humidity	20% to 85% RH; No condensation	
READBACK TEMP. COEFFICIENT (After A 30 Minute Warm-up)	Voltage	100ppm/°C	
	Current	200ppm/°C	
OTHER	Analog Control	Yes	
	Interface	USB, RS-232/RS-485; Factory option: LAN/GPIB	
	AC Input	85~265VAC, 47~63Hz, single phase	
DIMENSIONS & WEIGHT	70(W)x124(H)x300(D)mm; Approx. 2.5kg		

Notes: *1: At 85 ~ 132Vac or 170 ~ 265Vac, constant load.
 *2: From No-load to Full-load, constant input voltage. Measured at the sensing point in Remote Sense.
 *3: Measure with JEITA RC-9131B (1:1) probe
 *4: Measurement frequency bandwidth is 10Hz to 20MHz.
 *5: Measurement frequency bandwidth is 5Hz to 1MHz.
 *6: From 10%~90% of rated output voltage, with rated resistive load.
 *7: From 90%~10% of rated output voltage, with rated resistive load.
 *8: Time for output voltage to recover within 0.1% + 10mV of its rated output for a load change from 50 to 100% of its rated output current.
 *9: For load voltage change, equal to the unit voltage rating, constant input voltage.

PFR-100 Series Fanless Multi-Range D.C. Power Supply
PFR-100□ - GL - GTL-258
 Model: L: 0-50V/10A/100W
 M: 0-250V/2A/100W
 Cable Options: GTL-258: A GPIB cable including 25 pins Micro-D connector
 PSU-232: An RS-232 cable including RJ-45 connector
 PSU-485: An RS-485 cable including RJ-45 connector
 GTL-246: A USB cable for TypeA-TypeB connectors
 Interface Options: □: USB (Type B) & RS-232/RS-485 (RJ-45 connector) as default
 GL: LAN & GPIB (25 pins Micro-D connector)

ORDERING INFORMATION	
PFR-100L	Fanless Multi-Range D.C. Power Supply
PFR-100M	Fanless Multi-Range D.C. Power Supply
ACCESSORIES	
CD(User Manual, Programming manual) x 1, Power cord, GTL-134 test lead, Accessory Packages, GTL-104A test lead (for PFR-100L only), GTL-105A test lead (for PFR-100M only)	

OPTIONAL ASSESSORIES	
GTL-258	GPIB Cable, 2000mm
PSU-232	RS-232 Cable with DB9 Connector Kit
PSU-485	RS-485 Cable with DB9 Connector Kit
GTL-246	USB Cable (USB 2.0 Type A-TypeB Cable)
GRA-431-J-100/200	Rack mount adapter (JIS) with AC 100V/200V
GRA-431-E-100/200	Rack mount adapter (EIA) with AC 100V/200V
PFR-GL	LAN+GPIB interface

Deutschlands größter B2B-Onlineshop für Mess- und Prüftechnik.



Mess- und Prüftechnik, Die Experten.

Ihre Vorteile:

- > Eine unschlagbare Auswahl namhafter Hersteller
- > Hohe Lagerkapazität und kurze Wege
- > Bundesweite Lieferung und schnelle Zustellung meist innerhalb eines Tages
- > Mehrere tausend Mess- und Prüfgeräte
- > Tagesaktuelle Preise und Promotions
- > Warenkorbrabatt bei Online-Bestellung
- > Versandkostenfrei ab € 50,-
- > Dokumenten-Download u. v. m.



Wir haben die Lösungen für Ihre Mess- aufgaben.

dataTec

Mess- und Prüftechnik, Die Experten.

Ihre Vorteile:

- > Diplom-Ingenieure, Elektronik- und Elektrotechniker
- > Langjährige Praxiserfahrung und hohe Kompetenz
- > Bundesweit über 20 praxiserfahrene und herstellerzertifizierte Vertriebsingenieure im Außendienst bei Ihnen vor Ort

Experten für:

- > Oszilloskope
- > Spektrum- / Netzwerkanalysatoren
- > Netzgeräte / Stromversorgungen
- > Thermografie / Temperatur
- > Prüfgeräte VDE / Netzanalyse
- > u. v. m.



**Technische
Beratung
und Service.**