


# Datasheet

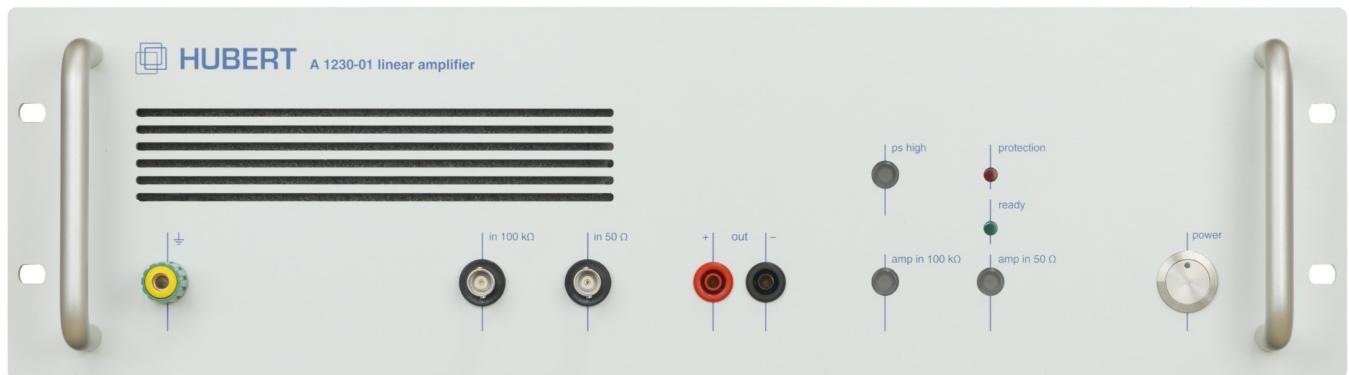

## A1230-01

**DC – 7 MHz | 450 V/μs | 185 W (DC-source) | 68 W (DC-sink)**

## 1 Product Description

The A1230-01 is a linear, extreme broadband precision power amplifier. It is ideally suited for applications that require quickly changeable signals at optional resistive and complex loads.

The A1230-01 is equipped with two added inputs with  $50\ \Omega$  and  $100\ k\Omega$  input resistance, respectively; the  $50\ \Omega$  input makes it the ideal downstream equipment for conventional function generators.

There are two operating voltages available for optional selection: high-voltage / low-current or low-volt / high-current. Particularly for very low-ohm loads, selection of low operating voltage results in significant reduction of the dissipation loss and a higher output current.

If higher output voltages are required, the preamplifier output (bridge out) allows for simple bridge circuit structures with a second A1230-01 for doubling the output voltage.

The device is equipped with a low-noise, temperature-controlled fan. In addition to over temperature shut-down, a feature for dissipation power calculation ensures fast power monitoring for perfect short-circuit and overload protection.

Operation is performed via the control elements on the front panel of the amplifier. Moreover, the amplifier can be completely remote-controlled by means of a simple byte protocol via the USB interface.

If higher output voltages or higher output currents are needed, configurations with several A1230-01 devices connected in series or in parallel are possible.


## 2 Features

- Universally applicable broadband lab amplifier; ideally suited as downstream equipment for function generators
- Amplifier is stable with all inductive and capacitive loads
- Output voltages up to 75 V<sub>DC/peak</sub>
- Output current up to 5 A<sub>DC</sub> / 10 A<sub>peak</sub> (> 10 Hz) / 15 A<sub>peak</sub> (< 5 ms)
- Two added inputs with 50 Ω and 100 kΩ input resistance, respectively
- Preamplifier output (bridge out) allows for simple bridge circuit structures for doubling the output voltage
- 2 supply voltages for ideal load adjustment
- USB port (emulated COM port) as standard

## 3 Applications

- General lab applications for research, development and testing
- EMC testing
- Material testing
- MRI
- Component tests
- Plunger coil drives
- Piezo actuation
- Generation of magnetic fields (e.g. with Helmholtz coils)
- Medical engineering
- Laser technology
- Plasma technology

## 4 Control Software

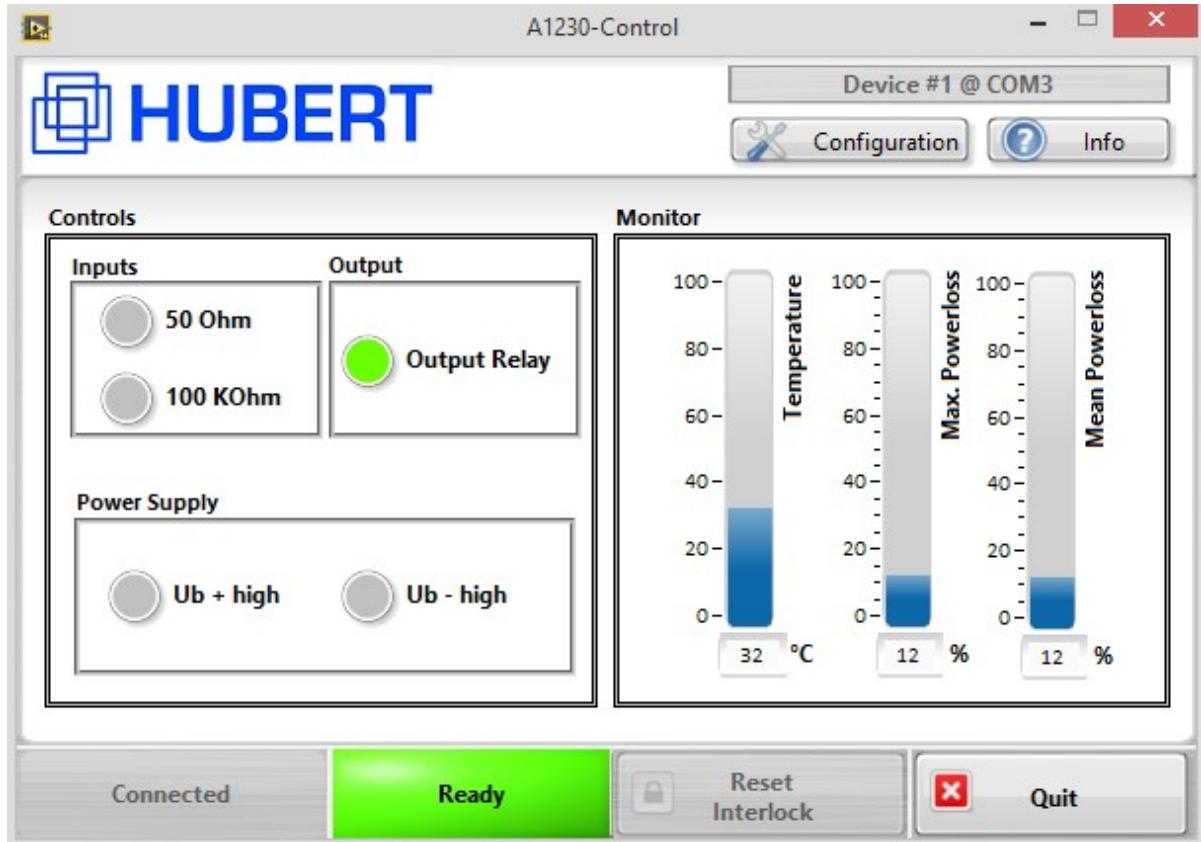

## 5 Pictures



## 6 Specifications


Parameters	Specification	Conditions/Moments
	Mains: 230 V	
	25° C ambient temperature	
	Continuous operation	
<b>Input Impedance</b>	50 Ω ± 1% Gain: 20 ± 1% ( $\pm 100\text{ppm}/^\circ\text{C}$ )	
	100 kΩ ± 1% Gain: 10 ± 1% ( $\pm 100\text{ppm}/^\circ\text{C}$ )	
<b>Maximum Input Level</b>	± 7,5 V	100 kΩ Input
	± 3,75 V	50 Ω Input
<b>Maximum allowed Input Voltage</b>	± 15 V ± 10 V	100 kΩ Input 50 Ω Input
<b>Small Signal Frequency Response</b>		
	DC - 7 MHz	-3 dB, 100 mV <sub>rms</sub> @ 50 Ω Load
	DC - 5 MHz	-1 dB, 100 mV <sub>rms</sub> @ 50 Ω Load
<b>Phase response</b>	0, -5 degrees	DC – 120 kHz @ 50 Ω Load
<b>Output Voltage (continuous)</b>		
<b>50 Ω Load, &lt; 1% THD+N</b>	± 75 V <sub>peak</sub>	< 800 kHz; High Voltage Mode
	± 62 V <sub>peak</sub>	< 1 MHz; High Voltage Mode
	± 37.5 V <sub>peak</sub>	< 1 MHz; Low Voltage Mode
<b>Output Current (continuous)</b>	± 2.5 A <sub>DC</sub>	High Voltage Mode
	± 5 A <sub>DC</sub>	Low Voltage Mode
<b>Output Current (pulse &lt; 5 ms)</b>	± 7.5 A <sub>peak</sub>	High Voltage Mode
	± 15 A <sub>peak</sub>	Low Voltage Mode
<b>Slew Rate</b>	> 450 V/μSec	50 Ω Load
<b>Rise Time</b>	< 280 ns	± 75 V Rectangular @ 50 Ω Load
	< 200 ns	± 60 V Rectangular @ 50 Ω Load

<b>Noise</b>		
20 Hz - 10 MHz	< 1.5 mV <sub>rms</sub>	
DC - 20 MHz	~ 10 mV <sub>pp</sub>	
<b>THD+N</b>		
100 kHz	< 0.1 %	53 V <sub>rms</sub> / 50 Ω Load
1 MHz	< 0.3 %	40 V <sub>rms</sub> / 50 Ω Load
<b>Output Offset</b>	± 2 mV typ.; ± 5 mV max. (± 0.1 mV/°C)	
<b>Output Impedance</b>	~ 50 mΩ + 0.30 μH	
<b>Output Impedance Bridge Out</b>	47 Ω	Load > 2 kΩ
<b>Source Power, DC</b>		
30 Ω	185 W	High Voltage Mode
7.5 Ω	185 W	Low Voltage Mode
<b>Sink Power, DC</b>	68 W	High/Low Voltage Mode
<b>Physical Characteristics</b>		
<b>AC Power</b>	230 VAC / 50 Hz	
<b>Remote control</b>	USB	
<b>Operating Temperature</b>	10 °C to 55 °C	
<b>Humidity</b>	80% or less at 40 °C	non-condensing
<b>Cooling</b>	Forced air	
<b>Dimensions (W x H x D)</b>	448 x 153.6 x 676 mm	
<b>Weight</b>	Approx. 14 kg	


## 6.1 Output Voltage vs. Frequency (THD + N < 1%)

Blue: High Voltage Mode


Magenta: Low Voltage Mode

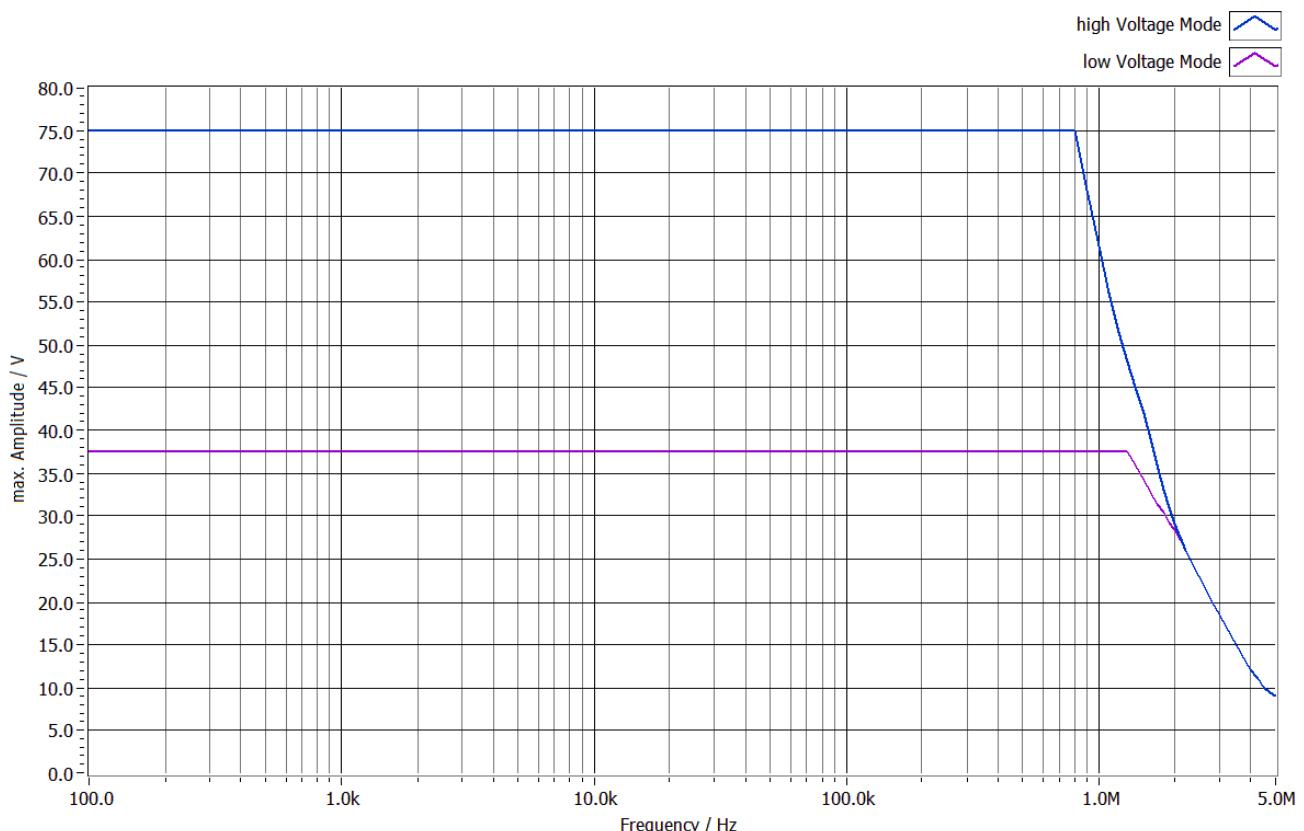


## 6.2 Power Dissipation per Side

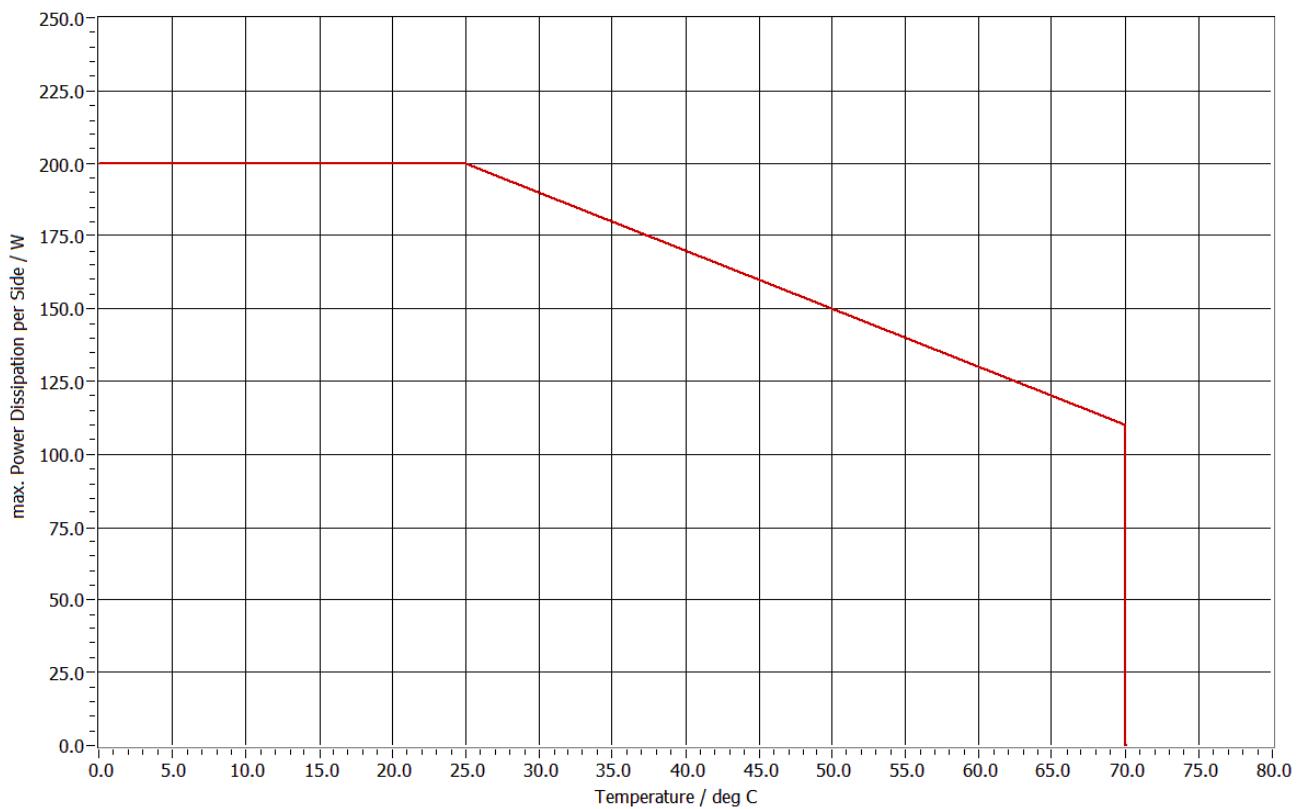


## 6.3 Square Wave at 200 kHz and 50 V Amplitude

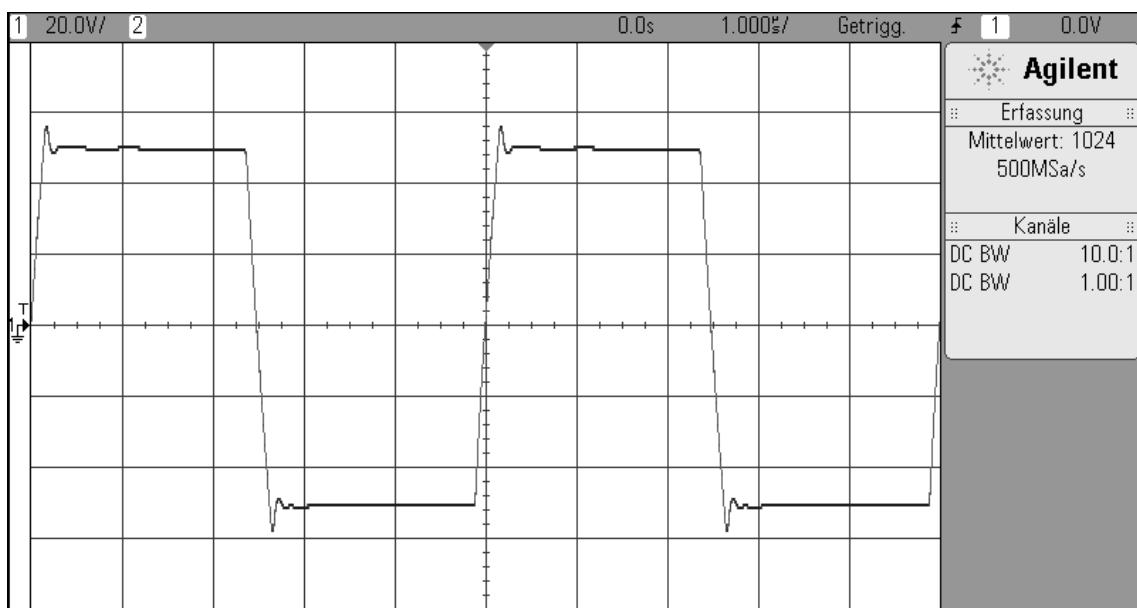

## 6.4 Square Wave at 500 kHz and 1 V amplitude

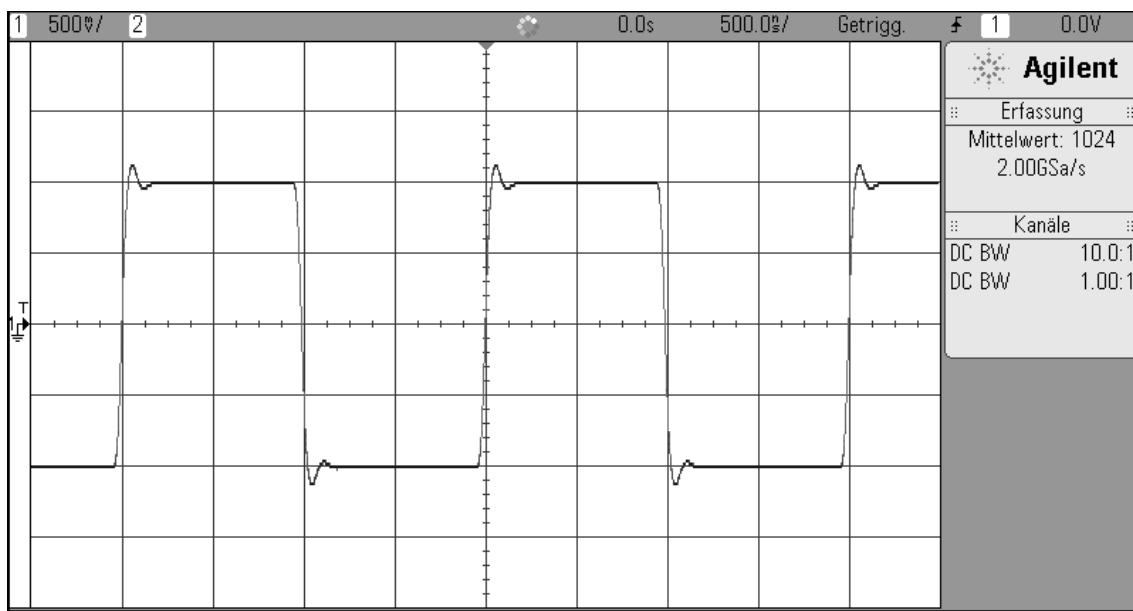


## 6.5 Gain 50 Ω Input

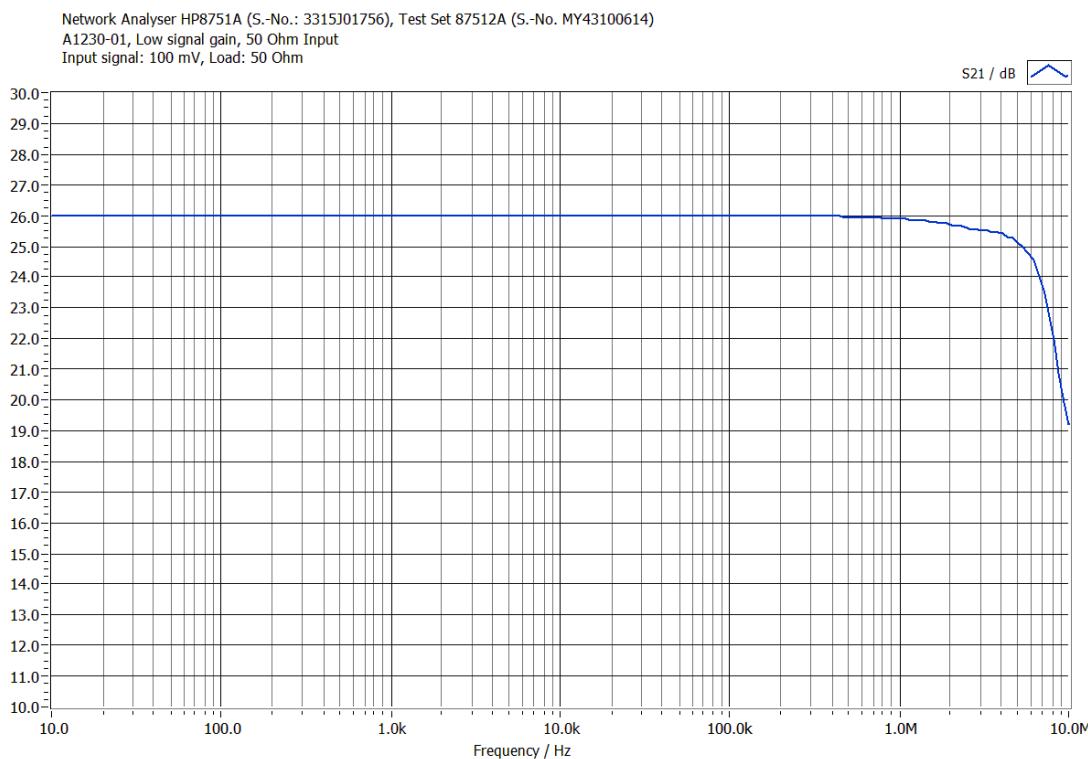


## 6.6 Gain 100 kΩ Input

Network Analyser HP8751A (S.-No.: 3315J01756), Test Set 87512A (S.-No. MY43100614)  
A1230-01, Low signal gain, 100 kOhm Input  
Input signal: 100 mV, Load: 50 Ohm

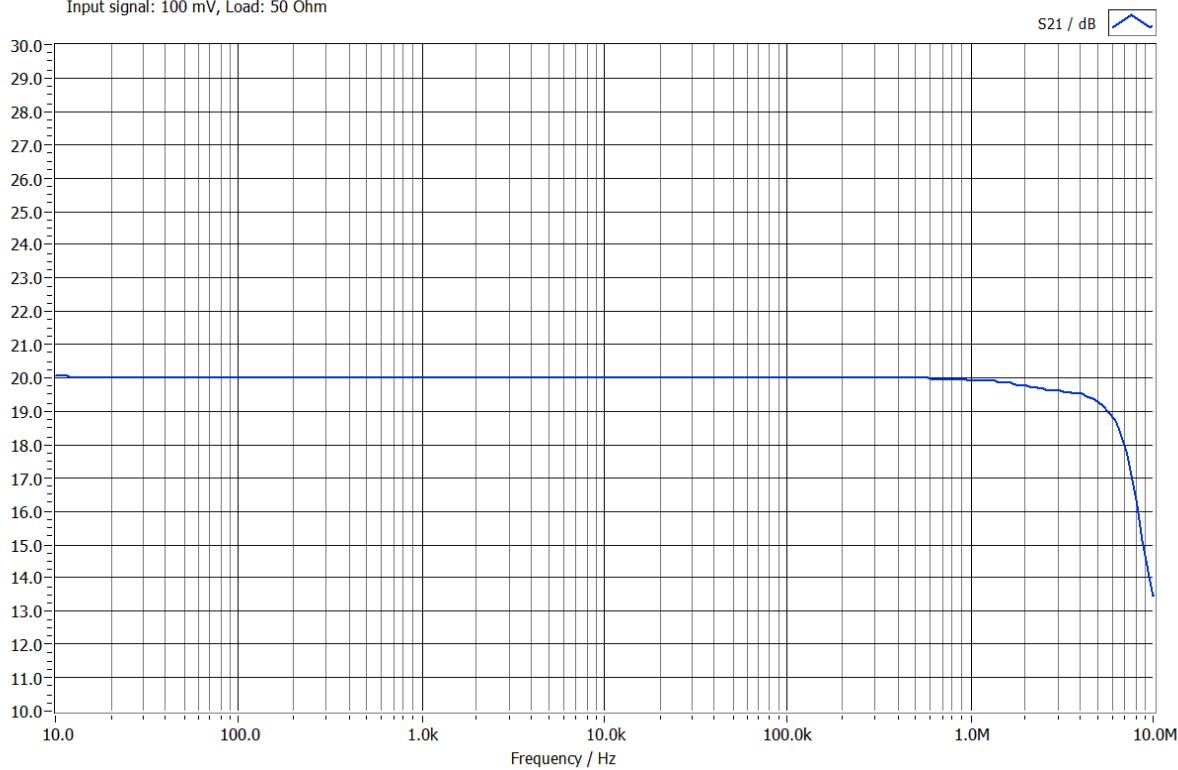


## 6.7 Output Impedance


Network Analyser HP8751A (S.-No.: 3315J01756), Test Set 87512A (S.-No. MY43100614)  
A1230-01, Output Impedance

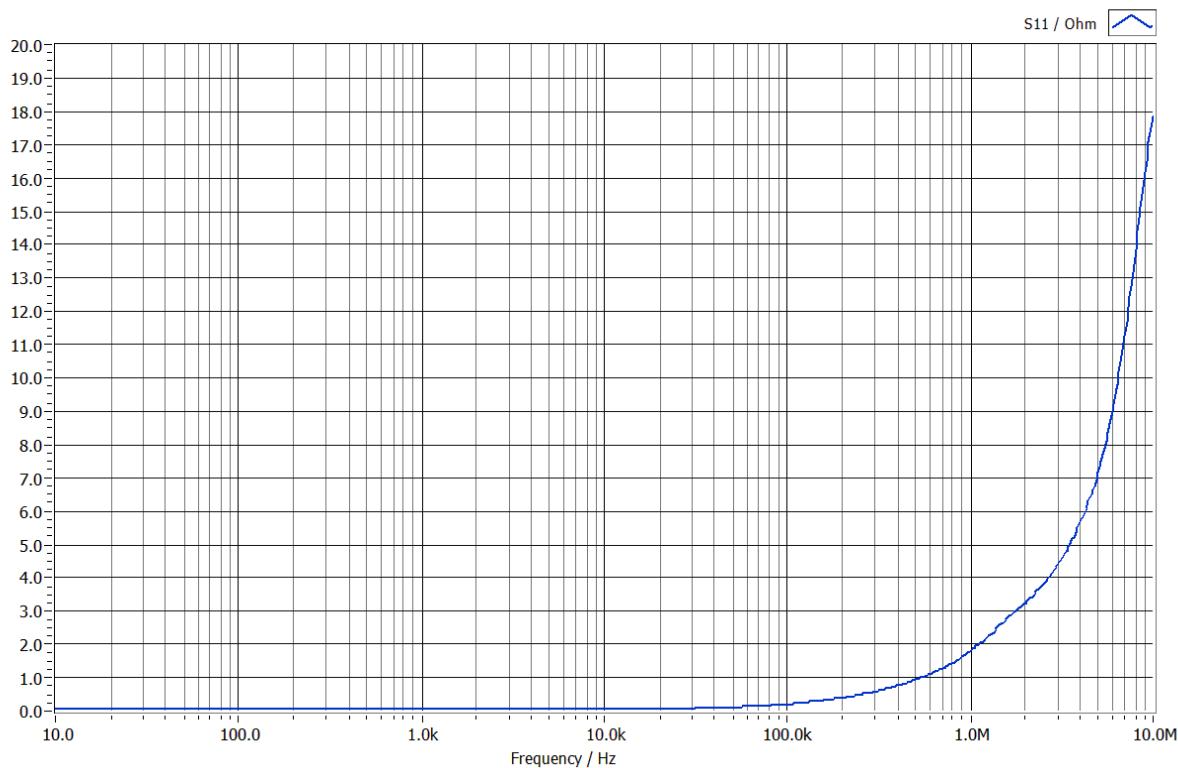

## 6.8 Output Current vs. Output Voltage DC Limit

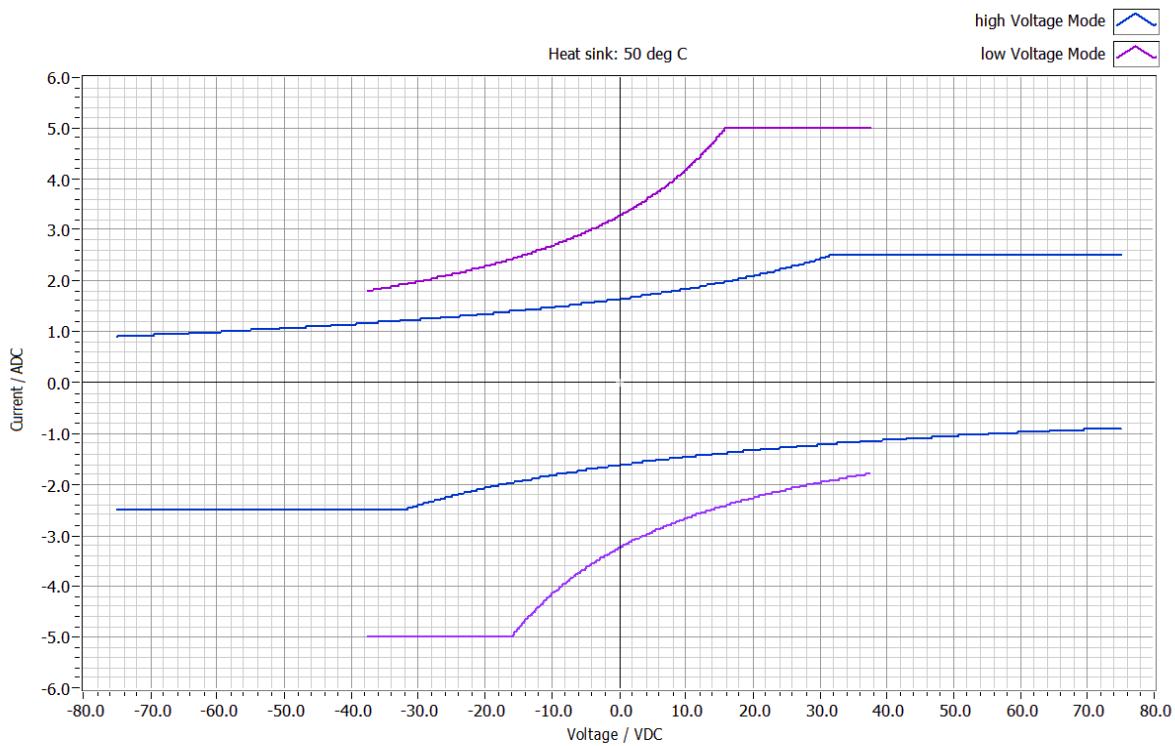

## 7 Block Diagram

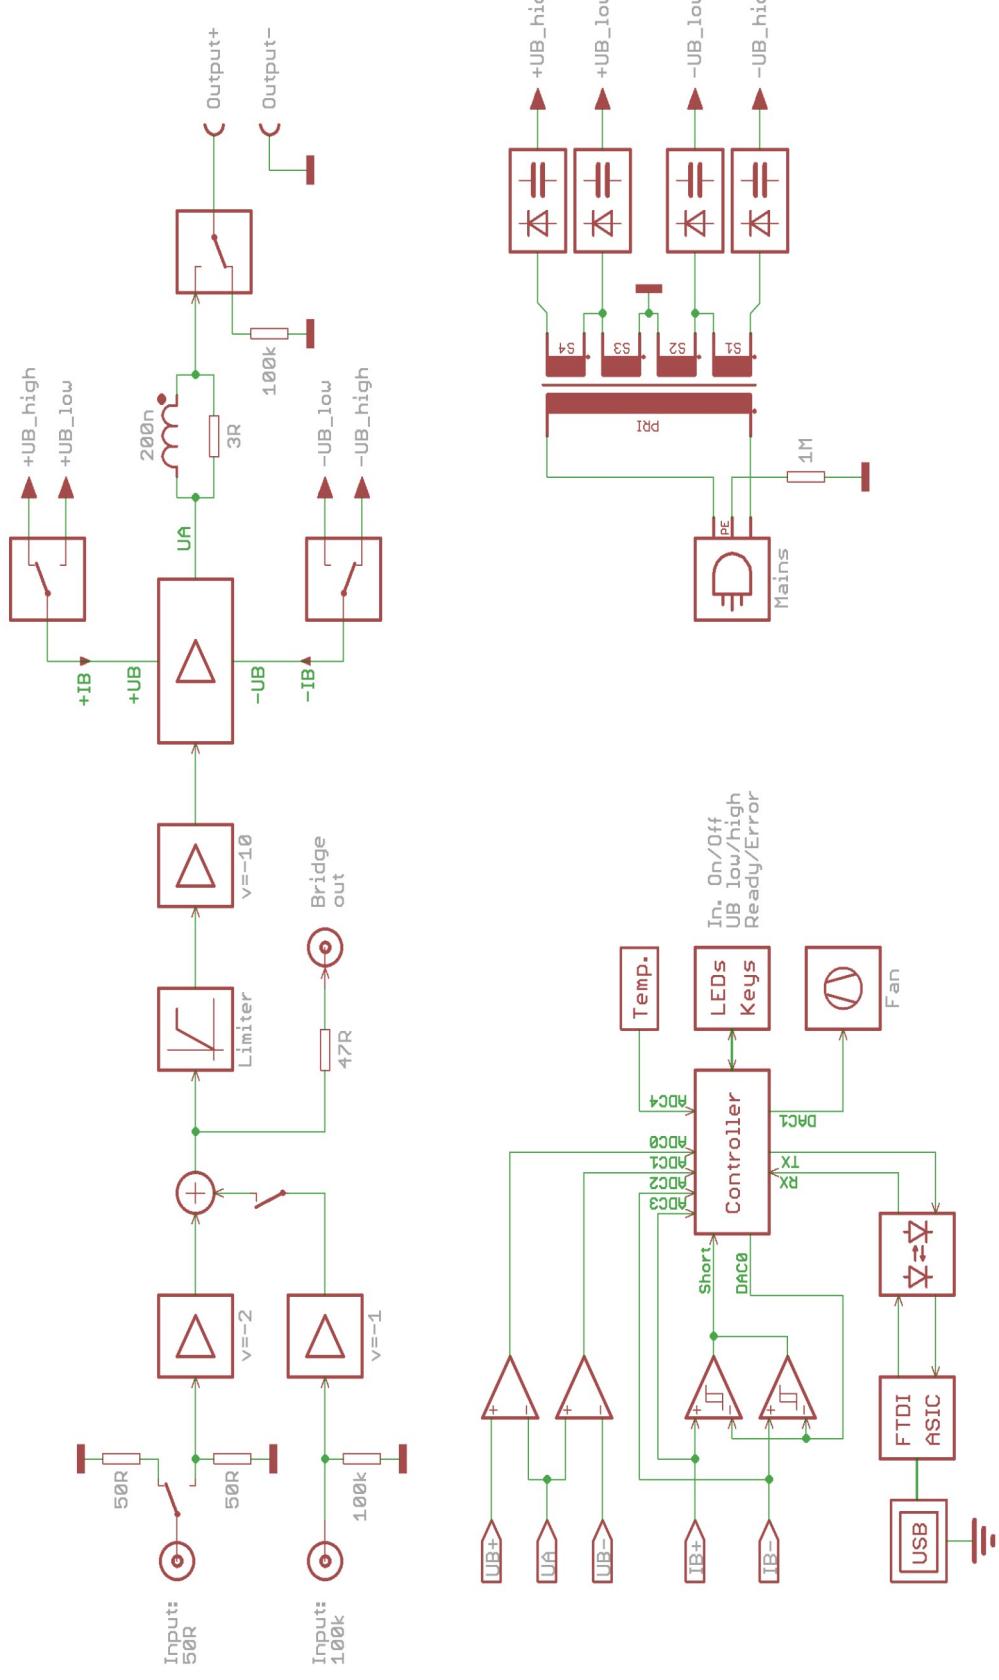

## 8 Product Options

The following product options are available at the time of placing the order. Upgrades of existing devices are not possible.

Article Name	Article Description	Article Number
Ethernet Option	Option-06: Ethernet interface (RJ-45)	11101060

## 10 Document History

Revision	Date	Changes
2.0	March 2020	First publication in new layout
3.0	May 2021	New housing


# Deutschlands größter B2B-Onlineshop für Mess- und Prüftechnik.

**dataTec**

Mess- und Prüftechnik, Die Experten.

## Ihre Vorteile:

- > Eine unschlagbare Auswahl namhafter Hersteller
- > Hohe Lagerkapazität und kurze Wege
- > Bundesweite Lieferung und schnelle Zustellung meist innerhalb eines Tages
- > Mehrere tausend Mess- und Prüfgeräte
- > Tagesaktuelle Preise und Promotions
- > Warenkorbrabatt bei Online-Bestellung
- > Versandkostenfrei ab € 50,-
- > Dokumenten-Download u. v. m.

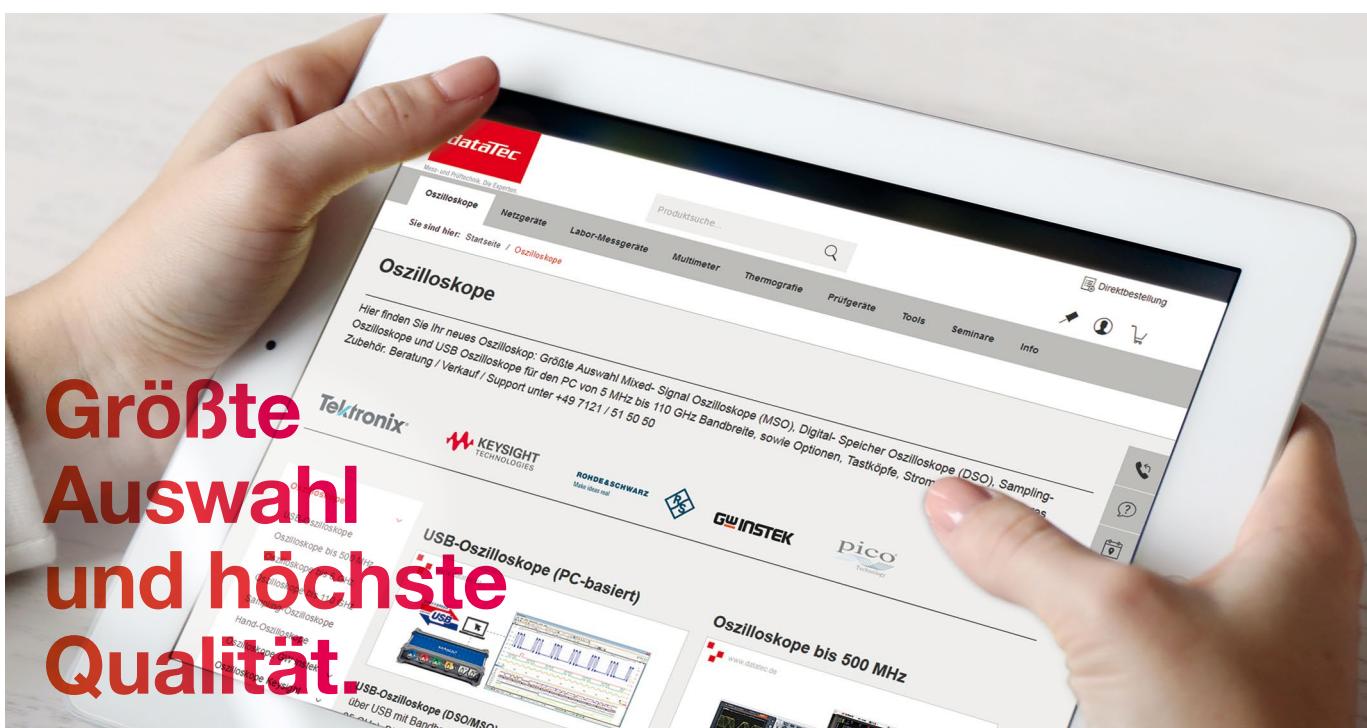

# Wir haben die Lösungen für Ihre Mess- aufgaben.

**dataTec**

Mess- und Prüftechnik, Die Experten.

## Ihre Vorteile:

- > Diplom-Ingenieure, Elektronik- und Elektrotechniker
- > Langjährige Praxiserfahrung und hohe Kompetenz
- > Bundesweit über 20 praxiserfahrene und herstellerzertifizierte Vertriebsingenieure im Außendienst bei Ihnen vor Ort

## Experten für:

- > Oszilloskope
- > Spektrum- / Netzwerkanalysatoren
- > Netzgeräte / Stromversorgungen
- > Thermografie / Temperatur
- > Prüfgeräte VDE / Netzanalyse
- > u. v. m.

