

# N6700 Modular Power System Family

## Introduction

The Keysight N6705 DC Power Analyzer represents an entirely new instrument category for Research and Development (R&D) engineers. It provides unrivaled productivity gains when sourcing, loading, and measuring DC voltage and current into a Device Under Test (DUT). Using the Keysight N6705 DC Power Analyzer, R&D engineers can gain insights into the DUT's power consumption in minutes without writing a single line of code. It provides an easy-to-use interface, with all sourcing, loading, and measuring functions available from the front panel.

Model number	Description
N6705C, N6715C	DC Power Analyzer Mainframes
N6731B – N6786A	DC Power Modules
N6791A –N6792A	Electronic Load Modules
PW9252A	PathWave Advanced Power Control and Analysis
PW9253A	PathWave Advanced Battery Test and Emulation



**dataTec**

Ihr Ansprechpartner /  
Your Partner:

dataTec AG  
E-Mail: [info@datatec.eu](mailto:info@datatec.eu)  
>>> [www.datatec.eu](http://www.datatec.eu)

**KEYSIGHT**  
Authorized Premium  
Distributor

# Table of Contents

R&D Engineers are Under Time Pressure.....	3
New Instrument Category for R&D Engineers to Increase Productivity .....	4
Modular System Based on DC Power Supply or Electronic Load Outputs .....	5
Voltmeter/Ammeter: Meter View .....	7
Oscilloscope: Scope View.....	8
Data Logger View.....	10
Arbitrary Waveform Generator.....	12
Additional Features.....	13
Choosing the Right DC Power or Electronic Load System to Meet Your ATE Needs .....	22
DC Electronic Load Module Feature Map.....	25
DC Power Module Feature Map.....	25
DC Power Module Key Performance Specifications .....	27
DC Electronic Load Module Key Performance Specifications .....	28
DC Power Analyzer Mainframe Key Characteristics .....	29
Ordering Information.....	30

# R&D Engineers are Under Time Pressure

Due to increasing time-to-market pressures, research and development engineers often find themselves on tight schedules to work through the Device-Under-Test (DUT) testing. Along with being driven faster, the R&D engineers can face a high regret factor should their haste result in damaging scarce, complex, or expensive DUTs during product development. This is particularly concerning when tests involve applying DC power or an electronic load to a DUT. Furthermore, test complexity increases when testing devices that require multiple input voltages, such as printed circuit boards.

Today, when performing DC power-related tests, R&D engineers must gather and configure multiple instruments to complete DC sourcing, loading, and measurement tasks. When executing these complex tasks, which can involve simultaneously connecting to and physically interacting with multiple test instruments, the risk of error increases. In response, R&D engineers may choose to automate tests that are too complex to do manually. Unfortunately, while automating tasks reduces human error, writing and debugging programs adds more work to already overloaded R&D engineers.

The Keysight N6705 DC Power Analyzer represents an entirely new instrument category for R&D engineers.

- Perform R&D testing and design validation with ease
- Source and measure DC voltage and current directly into the device under test
- Combine up to four DC power supplies or electronic loads, a Digital Multimeter (DMM), an oscilloscope, an arbitrary waveform generator, and a data logger in one integrated instrument
- Save time by eliminating the need for programming
- Avoid the hassle of gathering and configuring multiple instruments
- Customize the system by mixing and matching DC source power levels and measurement performance to optimize investment
- Connect seamlessly via GPIB, LAN, or USB
- Ensure full compliance with the LXI Class C specification
- Test power supplies using the built-in electronic load module

# New Instrument Category for R&D Engineers to Increase Productivity

## The Keysight N6705 DC power analyzer saves time

- Provides unrivaled productivity gains for sourcing or loading and measuring DC voltage and current into your DUT by integrating up to four advanced power supplies with DMM, scope, arbitrary waveform, and data logger features.
- Eliminates the need to gather multiple pieces of equipment and create complex test setups, including transducers (such as current probes and shunts) to measure current into your DUT.
- Eliminates the need to develop and debug programs to control a collection of instruments and take useful measurements because all the functions and measurements are available at the front panel.

## The Keysight N6705 DC power analyzer makes these tasks easy, right from the front panel

- Set up and view critical turn-on and turn-off sequences.
- Measure and display voltage and current versus time to visualize power into the DUT.
- Control DC bias supply or electronic load ramp-up/down rates.
- Generate DC bias supply or loading transients and disturbances (arbs).
- Log data for seconds, minutes, hours, or even days to see current/power consumption or capture anomalies.
- Save data and screenshots to internal storage or external USB memory devices.
- Save and name your setup and tests for easy re-use.
- Share setups with colleagues.

## The Keysight PW9252A PathWave Advanced Power Control and Analysis saves even more time

The PW9252A PathWave Advanced Power Control and Analysis software is a companion PC application that lets you control any of the N6700 family's DC power modules or electronic load modules—when installed in up to four N6705 mainframes—from a single PC control screen. This software improves data visualization and data management.

- Compliments the N6705 DC power analyzer's front panel controls.
- Control and analyze data from up to four N6705 DC power analyzer mainframes and any installed modules simultaneously—up to 16 power modules or electronic load modules.
- Easily create complex waveforms to simulate or load down a DUT by inputting a formula, choosing from built-in, or importing waveform data.
- Integrate software functions into the user's programming environment via API (automation programming interface)
- Enhanced control and analysis of data with familiar PC controls and a large display.
- Data log measurements are taken directly on a PC.
- Perform statistical analysis of power consumption.

## Modular System Based on DC Power Supply or Electronic Load Outputs

The Keysight N6705 DC power analyzer is a modular system that can be tailored to meet specific test needs. The DC power or load module is at the heart of the DC power analyzer. The Keysight N6705 DC power analyzer is a mainframe with four slots to accept one to four DC power or load modules. Each DC power or load module occupies one slot, except for the N6750 high-performance autoranging and N6760 precision power modules, which are rated at  $\geq 300$  W, and the N6792A, which occupies two slots. This modular design allows you to mix and match over thirty modules to create a solution optimized to meet specific test requirements.

R&D engineers can invest in high-performance outputs where speed and accuracy are needed or purchase basic performance outputs for simple DC power requirements. In the future, as your test needs change, you can purchase different modules and swap them into the DC power analyzer, thus creating a solution that protects your investment and grows with you.

Each DC power module and electronic load module output is fully isolated and floating from the ground from each other.



**Figure 1.** The Keysight N6705 DC power analyzer


Feature	Benefit
Integrates capabilities of power supply, DMM, scope, arb, and data logger	Saves time by eliminating the need to find and interconnect multiple instruments. It provides synergistic functions that are not available from separately connected instruments.
Large color graphics display	Fast, simple, quick set-up and monitoring. Ability to visualize results of multiple channels.
Connections and controls are color-coded to the display	Fast set-up and control. Confidence that you are configured and testing correctly.
Intuitive, dedicated physical controls for common functions	Fast set-up and control using a familiar interface, with each instrument function behaving like its standalone counterpart.
Access all capabilities without programming	Eliminating the need for a PC, drivers, and software will reduce 90% of the effort associated with setup.

### N6700 Modular Power System Family


The N6730, N6740, and N6770 Series of basic DC power modules	50 W, 100 W, and 300 W; up to 150 V, up to 20 A
The N6750 Series of high-performance, autoranging DC power modules	50 W, 100 W, 300 W, and 500 W; up to 60 V, up to 50 A
The N6760 Series of precision DC power modules	50 W, 100 W, 300 W, and 500 W; up to 60 V, up to 50 A
The N6780 Series of application-specific power modules	Up to 80 W; up to 20 V, up to $\pm 8$ A
The N6790 Series of DC electronic load modules	Up to 200 W; up to 60 V, up to 40 A

## Voltmeter/Ammeter: Meter View

Each DC power or load module in the Keysight N6705 DC power analyzer has a fully integrated voltmeter and ammeter to measure the actual voltage and current being sourced from the DC output into the DUT. Because this voltmeter/ammeter function is built-in, it is easy to make measurements without the need for additional wires or the added complexity of current sense resistors or current shunts. The accuracy of voltage and current measurements is based on the installed module type (load, basic, high-performance, precision, or SMU). You can find the accuracy specification in the tables starting on page 27 under “Voltage Measurement Accuracy” and “Current Measurement Accuracy.”<sup>1</sup>

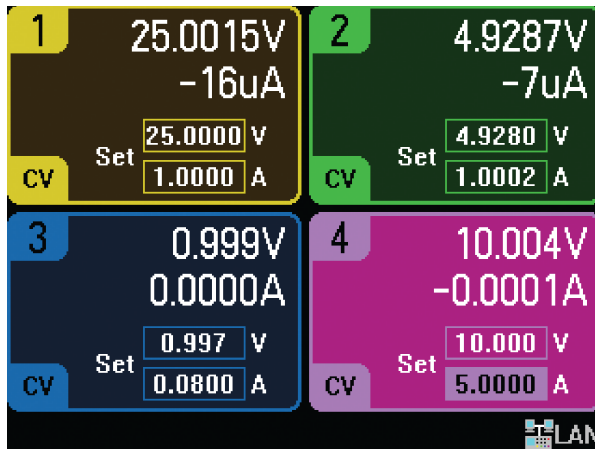

**Figure 2.** In Meter View, all 4 outputs can be viewed simultaneously. Both measured values for voltage and current, as well as the corresponding settings for voltage and current, are displayed for each output.

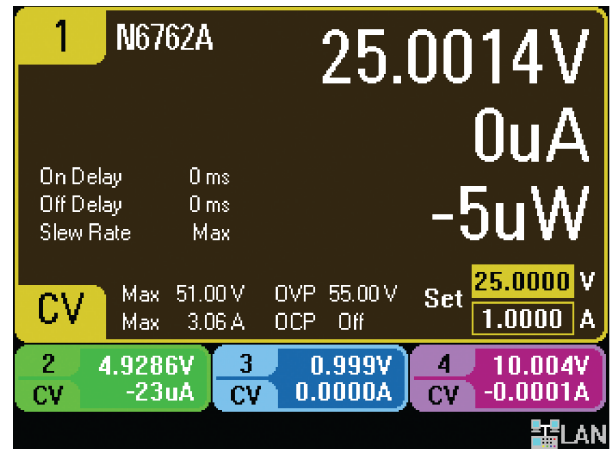


**Figure 3.** In Meter View, you can also view an enlarged view of a single channel, displaying numerous settings and measured values for that channel. A summary is shown for the other three channels.

<sup>1</sup> Complete specifications are available at [N6700 Series Specifications Guide](#)

# Oscilloscope: Scope View

Each DC power or load module in the Keysight N6705 DC power analyzer features a fully integrated digitizer that captures the actual voltage-versus-time and current-versus-time data being sourced from the DC output into the DUT. The digitized data appears on the large color display just like an oscilloscope. Because this oscilloscope function is built-in, it is possible to make current measurements without the need for current sense resistors, current shunts, or current probes. This dramatically reduces measurement setup complexity and provides accurate, fully specified, calibrated measurements. The accuracy of the measurements in oscilloscope mode is based on the type of power module installed (load, basic, high-performance autoranging, precision, and SMU). You can find this information in the Keysight N6700 Modular Power System Family Specifications Guide under “Oscilloscope Measurement Accuracy.”<sup>2</sup>

The N6790A, N6760, and N6780 SMU power modules offer simultaneous digitizing of output voltage and output current, such that you can view a voltage trace and a current trace simultaneously on the oscilloscope display. For all other module types, you can select to view either a voltage trace or a current trace on the oscilloscope display.

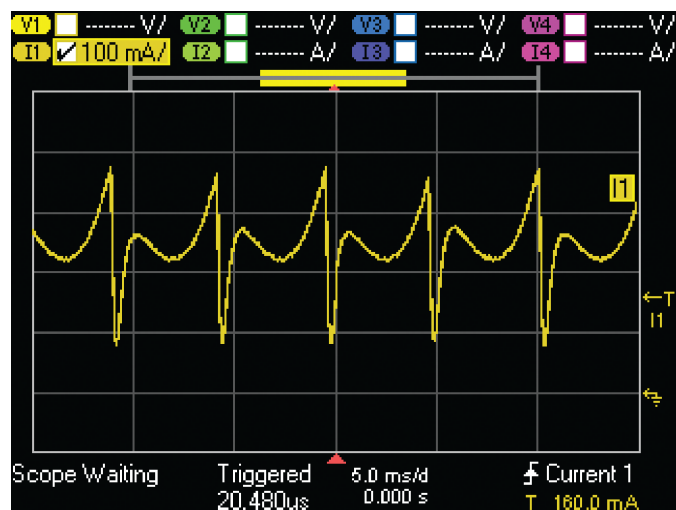

**Figure 4.** In the scope view, voltage and current traces are displayed. In this picture, the DC current flowing into the DUT is clearly visible as a time-varying waveform.

The table below shows the relationship between the number of scope traces, the sample rate, and the buffer size available for each trace. As shown, the digitizer can run at up to 200 kHz with up to 256 k samples per trace (512 k samples with SCPI commands). With an effective measurement bandwidth of up to 30 kHz, this oscilloscope function is perfectly matched to capture time-varying events on the DC output, such as peak current demand, dropouts, rise times, and other DC transients and disturbances.

The measurement buffer size can be set to between 1 k and 256 k points. Whatever buffer size is selected, its available points must be divided by the total number of traces being measured.

<sup>2</sup> Complete specifications are available at [N6700 Series Specifications Guide](#)

Module type	Number of traces (1 trace = V or I)	Fastest sample rate	Maximum buffer size available per trace
One N6780 SMU or N6790A	1 trace	5.12 $\mu$ s (~ 200 kHz)	256 k points
Any power module	1 or 2 traces	10.24 $\mu$ s (~ 100 kHz)	128 k points
Any power module	3 or 4 traces	20.48 $\mu$ s (~ 50 kHz)	64 k points


The oscilloscope can be triggered on either voltage or current levels. Because the Keysight N6705 DC power analyzer is an integrated instrument, the oscilloscope can also be easily configured to trigger at the start of an arbitrary waveform or to trigger when the DC power output is enabled. For example, to make an inrush current measurement on your DUT, you can set the oscilloscope to trigger on the DC output's on/off key, set the trigger mode to single shot, and then turn on the DC output. This will immediately capture the current flowing out of the DC module into the DUT and give a picture of the DUT's inrush current. This integrated functionality is not available when using a collection of separate test instruments on the test bench. It is an example of how the DC power analyzer reduces setup time and complexity.

# Data Logger View

The Keysight N6705 DC power analyzer can also function as a data logger. The N6705 can continuously log data to the large color display and a file using the measurement capability built into each DC power or load module. Data can be simultaneously logged on all four DC outputs. The accuracy of the voltage and current measurements depends on the type of installed module (load, basic, high-performance, precision, and SMU).


As illustrated in the table below, there are two modes of operation:

- In standard mode, measurements are spaced by the sample period, which is programmable from 75 milliseconds to 60 seconds. For each DC output, voltage measurements, current measurements, or both can be logged. Each reading is an integrated voltage or current measurement. Standard mode data logging is available on all DC power or load module types.
- In continuous sampling mode, the built-in digitizer of the DC power module runs continuously at 50,000 readings per second. You can specify a sample period, which is the time frame during which these continuous readings will be accumulated. For each sample period, one average reading (and, optionally, a minimum and maximum value) is saved. In this mode, the digitizer runs continuously, averaging and storing the readings; therefore, it always makes measurements, ensuring no data is missed. The sample period is programmable from 20 microseconds to 60 seconds. In this mode, the N6790A, N6760, and N6780 SMU modules simultaneously log output voltage and output current. For all other module types, you can log either voltage or current when the module is in continuous sampling mode.

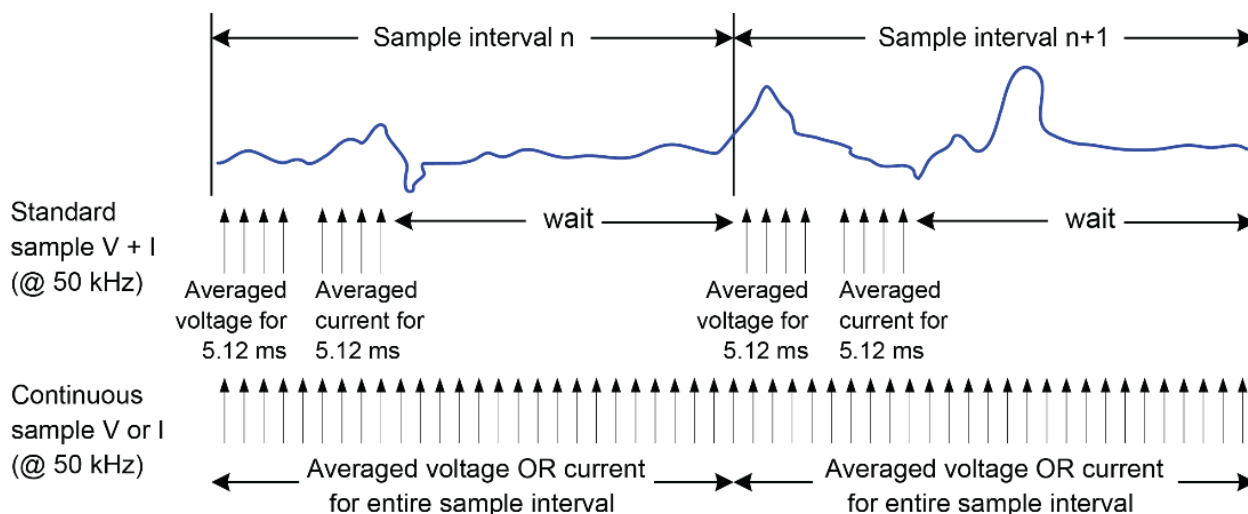


	Standard data logging	Continuous data logging
Sample interval range	75 milliseconds to 60 seconds	20* microseconds to 60 seconds * Add 20 $\mu$ s for each additional parameter (Voltage, Current, Min, or Max)
Sample rate	50 kHz	200 kHz for N6780 SMU and N6790A 50 kHz for all others
Data logging mode used by N6705	Automatically selected when any N6730, N6740, N6750, or N6770 is set to sample BOTH voltage and current.	Automatically selected when any N6730, N6740, N6750, or N6770 is set to measure either voltage or current. Note that N6790A, N6760, and N6780 SMU modules can be set to sample BOTH.

The maximum data log file size is ~2 gigabytes, which is equivalent to around one billion readings. The data file can be stored on the N6705's internal non-volatile RAM or saved externally on a USB memory device.

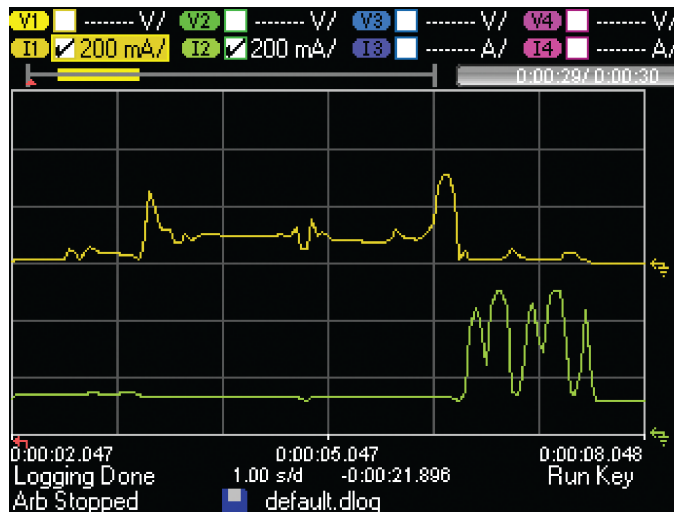

**Figure 5.** In Data Logger View, you can log data on multiple traces. Here, the current flowing out of output 1 and output 2 is captured over 30 seconds.

The data logger display can be saved as a GIF file for use in reports, and the logged data can be saved for viewing later. Logged data can also be exported to a CSV file that can be read by the most common data analysis software packages.

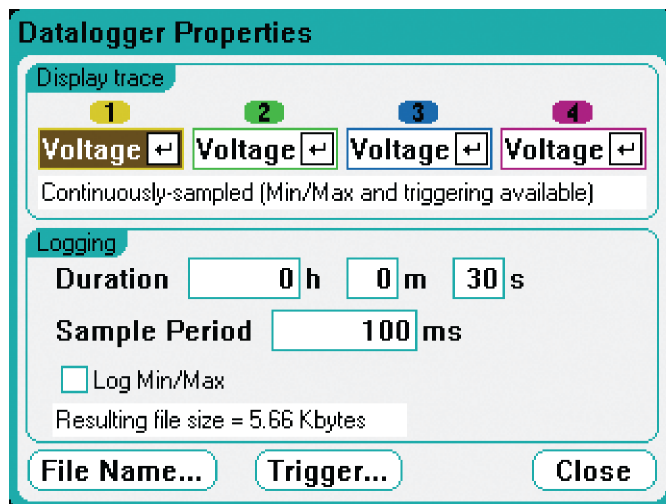

**Figure 6.** To set up the data logger, use a menu screen to select the operating parameters. Setup screens like this are used throughout the DC power analyzer.

# Arbitrary Waveform Generator

The module's built-in arbitrary waveform generator modulates each DC power output or load on the Keysight N6705 DC power analyzer. This allows the output to function as both a DC bias transient generator and an arbitrary waveform generator. The maximum bandwidth is determined by the installed module type (basic, high-performance, precision, SMU, and load). Refer to the Keysight N6700 Modular Power System Family Specifications Guide<sup>3</sup> for the bandwidth of each DC power or load module.

Keysight N6705 utilizes run-length encoding, where each point in the waveform is defined by the voltage setting and the dwell time, or duration, at which it remains at that setting. Waveforms can be generated by specifying only a small number of points. For example, a pulse can be defined by only three points.

The Keysight N6705 offers the following waveform choices (see table below).


Arbitrary waveform	Number of points per waveform
]	100 points
Step	2 points
Ramp	100 points
Pulse	3 points
Stepped ramp (or staircase)	Determined by the number of steps programmed
Exponential	100 points
Trapezoid	100 points
User-defined waveform (where the output is a voltage or current source)	Up to 512 points with point-by-point adjustable dwell
Constant-dwell waveform	Up to 64,000 points with programmable dwell (same for all points)

For each waveform, you can set it to repeat continuously or specify the number of times the waveform is repeated. For example, to generate a pulse train of 10 identical pulses, you can program the parameters for one pulse and then specify that you want it to repeat 10 times.


For user-defined voltage and current waveforms, you can download up to 512 setpoints of voltage or current. With loads, waveforms can be generated in voltage, current, resistance, and power. A dwell time is specified for each setpoint, and output will stay (i.e., dwell) at that setpoint for the programmed dwell time value. For each of the 512 setpoints in the user-defined waveform, you can have a different dwell time from 0 to 262 seconds with 1 microsecond resolution. The module will step through the user-defined table of values, staying at each setpoint for the programmed dwell time, and then it will move on to the next point. User-defined waveforms can be imported from a CSV file or directly entered from the front panel of the DC power analyzer.

Constant-dwell voltage or current waveforms can also be generated, with up to 64000 programmable points. With loads, voltage, current, resistance, and power are available.

<sup>3</sup> Complete specifications are available at [N6700 Series Specifications Guide](#)

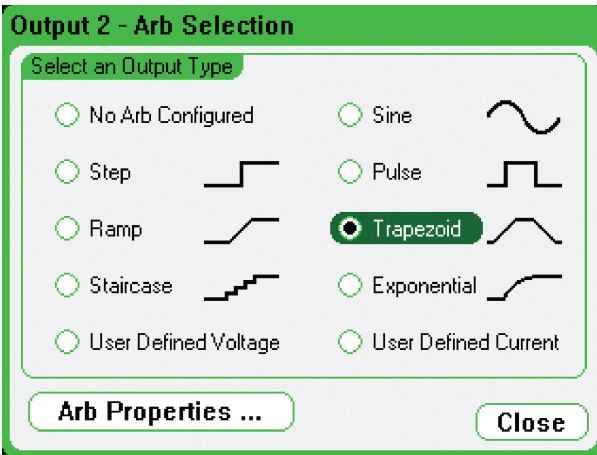

**Figure 7.** The Arb Selection menu is used to select which pre-programmed waveform will be applied to the output of the DC power module. Each of the four outputs can have a different waveform applied.

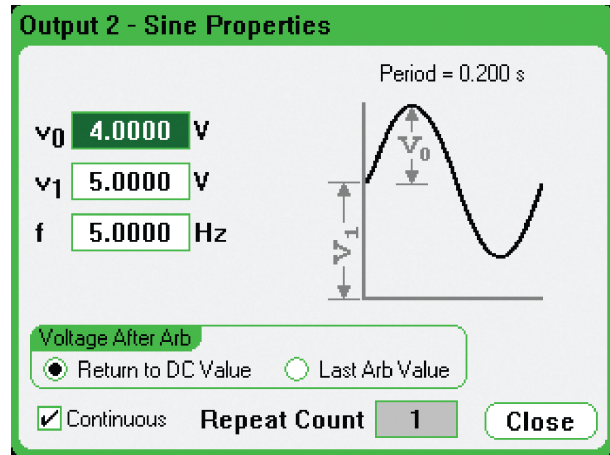


**Figure 8.** Once you have selected a waveform, you simply fill in the blanks to describe the waveform.

## Additional Features

### Output sequencing

Each DC power or load module can be individually set to turn on or off with a delay. By adjusting the delay times and then commanding the Keysight N6705 to turn on, you can set the Keysight N6705 modules to sequence in a particular order. The same sequencing capability can shut down the modules in a particular order. Delay times can be set from no delay to one thousand seconds of delay in one-millisecond increments.

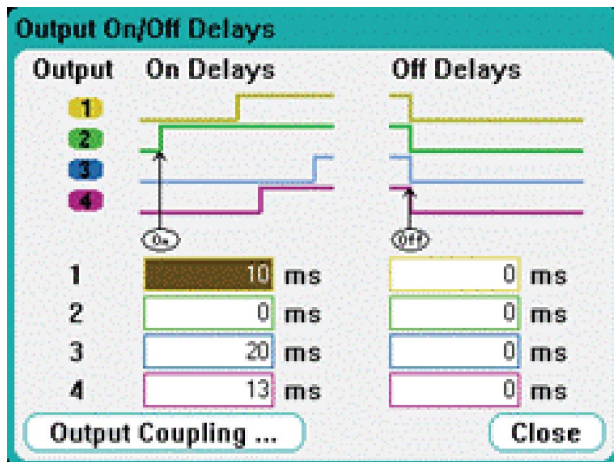

**Figure 9.** The Output On/Off Delays screen allows you to enter the delay times for each output. A graphical representation of the settings is shown to visually confirm your choices.

For applications that require more than four DC power or load modules to be sequenced, this output sequencing can be extended across multiple Keysight N6705 mainframes. By wiring the I/O ports on the rear panel of the mainframes together, a pair of synchronization signals is sent between the mainframes, allowing the output sequences of each mainframe to be synchronized.

This capability is also supported by linking Keysight N6705 output sequences with outputs installed in N6700C, N6701C, and N6702C Low-Profile Modular Power System mainframes.

## **Programmable voltage slew**

For certain applications, such as inrush limiting or powering rate-sensitive devices, it is necessary to slow down and control the speed of the DC output to maintain a specific voltage slew rate. The Keysight N6705 offers a programmable voltage slew rate, allowing you to easily control the speed at which the output transitions from one voltage to another. You can set the speed of a voltage change anywhere from its maximum up/down programming speed to its slowest change of up to 10 seconds.

## **Series and parallel operation**

Identically rated outputs can be operated directly in series to increase the available voltage and power per output. The maximum series operation is 240 V. Similarly, identically rated outputs can be operated directly in parallel to increase the available current and power per output. The maximum rated parallel operation is 100 A, as per the Keysight N6705.

## **Convenient front panel connections**

The N6705 uses 3-way binding posts on the front panel for connection to the DUT. The binding posts accept standard banana plugs, bare wire, and spade-lug connectors. The binding posts are rated for 20 A per post. To avoid setup and connection errors, the binding posts are color-coded to the control keys and the display. For modules with outputs rated at greater than 20 A, such as the N6753A or N6792A, high-current wires must be brought out through the N6705's rear panel. The N6705C mainframe offers rear panel access ports to facilitate routing of these wires.

## 4-wire sensing for improved measurement accuracy

To improve the voltage measurement accuracy and regulation of the DC outputs, the Keysight N6705 DC power analyzer offers 4-wire sensing capability, also known as remote sensing, on each of its four outputs. 4-wire remote sensing is useful when the DUT draws high current, and you want to account for voltage drop in the power leads to achieve tight regulation and high voltage measurement accuracy.

To use 4-wire sensing in addition to your power leads, you must connect two low-current sensing leads between the DUT input terminals and 4-wire sense terminal binding posts located on the front of the N6705 mainframe. This allows the output module to monitor and regulate its output voltage directly at the DUT input terminals, rather than at the N6705 front panel output binding posts. It then automatically adjusts its output voltage to compensate for voltage drops across the resistance in the power leads.

For convenience, switching between 2-wire mode (local sensing) and 4-wire mode (remote sensing) is done via an internal relay inside the N6705 DC power analyzer, eliminating the need for shorting bars or jumpers commonly found on other bench power sources.

## DC power modules offer low-noise outputs

Careful attention has been paid to this design to ensure low normal mode noise (ripple and peak-peak) and low common mode noise. While all DC power modules are switching power supplies, the N6750 high-performance autoranging DC power modules, the N6760 precision DC power modules, and the N6780 Source Measure Units are switching power supply designs that outperform most linear power supplies on the market.

## DC power modules provide fast voltage changes

When it comes to speed, the N6750 high-performance autoranging DC power modules, the N6760 precision DC power modules, and the N6780 Source Measure Units achieve performance that surpasses that of a typical DC power supply. Thanks to an active down-programming circuit to rapidly pull down the output when lowering the output voltage, these power modules can rapidly program both up and down in voltage. For example, changing voltage from 0 V to 50 V or 50 V to 0 V can be accomplished in less than 1.5 milliseconds.

Note that the programming speed is less than 200 microseconds for smaller voltage changes, such as those from 0 V to 5 V or 5 V to 0 V. These output speeds enable the N6750/60/80 to achieve maximum system throughput when your test requires frequent changes in power supply voltage settings.

## Autoranging for flexibility

The N6750 high-performance auto-ranging DC power modules and the N6760 precision DC power modules give you even more flexibility by providing autoranging outputs. This autoranging capability provides maximum output power at any output voltage up to 60 V, allowing one power supply to replace the function of several power supplies. Its operating range encompasses both low voltage and high current, as well as high voltage and low current operating points. For example, the N6755A high-performance, autoranging DC module, rated at 20 V, 50 A, and 500 W, can provide full power at:

- 10 V @ 50 A (= 500 W),
- 20 V @ 25 A (= 500 W),
- 15 V @ 33 A (= 500 W),
- or anywhere in between.

Therefore, this 500 W autoranging power supply, due to its extended voltage and current range, can produce voltage and current combinations in the range of a 1000 W non-autoranging power supply.

## Real-time clock

The Keysight N6705 DC power analyzer has a built-in battery-backed real-time clock. This allows for the proper timestamping of logged data and tags files with the correct creation dates.

## Front panel USB

The Keysight N6705 DC power analyzer features a convenient front-panel USB port, designed exclusively for data storage devices, such as USB memory devices or USB hard drives. You can save test setups, test results, and screen images on devices connected to this USB port. It is also easy to transfer test setup files between two N6705 DC power analyzers or to exchange test results between the DC power analyzer and a PC. You can also log data directly to the USB device plugged into the front panel. This extends the total storage capability of the N6705.



**Figure 11.** The N6705's front panel USB port.

## Internal memory

The Keysight N6705 DC power analyzer has 4 gigabytes of non-volatile storage, which is shared between the four DC outputs. This storage can be used to save test setups, test results, and screen images. External USB storage is supported for increased storage capacity, allowing for more extended data logging.

## Emergency stop

Should a hazardous situation occur during testing, you can press the large red emergency stop button on the front panel of the Keysight N6705. Pressing this easy-to-find button immediately removes power from the DC outputs. However, any data collection (such as a scope trace or data log) running at the time will continue to run. By doing so, the data you were collecting is saved, and you will get a record of what happened at the time of the event that caused you to press the emergency stop button. The measurements could aid in the DUT's failure analysis, repair, or debugging.



**Figure 12.** The emergency stop button shuts down all outputs immediately.

## DUT protection features

Each Keysight N6705 DC power module is protected against overvoltage, overcurrent, and overtemperature. A fault condition in one module can be detected within 10 microseconds by other modules, allowing them to be quickly shut down to avoid hazardous conditions on your DUT.

## Output disconnect and polarity reversal relays

Power modules in the Keysight N6705 can be individually ordered with optional Output Disconnect Relays (option 761) or Output Disconnect/Polarity Reversal Relays (option 760). See the table on page 25 for the availability of options 760 and 761. All relays are built into the module, eliminating the need for additional wiring to incorporate the relay function.

Although the plus and minus rail of the output power mesh is physically disconnected from the output terminals with options 760 and 761, a small AC network is still connected across the plus and minus output terminals. This AC network is required for EMI compliance.

With option 761, Output Disconnect Relays, an emergency condition or turning the DC output off causes mechanical relays to disconnect both the plus and minus sides of the power supply, including the sense leads.

With option 760, Output Disconnect/Polarity Reversal Relays, mechanical relays switch the leads on both the positive and negative sides of the power supply, including the sense leads, resulting in a voltage polarity reversal at the DUT. In addition to polarity reversal, option 760 provides the same output disconnect function as option 761.

Note: When option 760 Output Disconnect/Polarity Reversal Relays is installed, the output current of some modules is limited.

## Triggering

The Keysight N6705 DC power analyzer features hardware trigger-in/trigger-out signals, allowing it to be synchronized with other test equipment. For example, when you turn on the outputs of the Keysight N6705, it can generate a trigger signal to start a measurement on an RF power meter.

## Connectivity

The Keysight N6705 DC power analyzer comes standard with GPIB, USB 2.0, and 10/100 base-T Ethernet LAN interfaces and is fully compliant with the LXI Class C specification.

## Security

All non-volatile RAM data and settings can be cleared from the front panel. For customers with security concerns about USB access to internally stored test data and setups, the Keysight N6705 also offers option AKY, which removes the USB ports from the front and rear of the Keysight N6705. When used in GPIB systems, the LAN and USB interfaces can be disabled for extra security.

## Control from any browser

The Keysight N6705 can be controlled via a standard web browser. Its web server provides a webpage containing a graphical representation of the front panel. Operating the Web GUI is identical to operating the real front panel on the Keysight N6705 DC power analyzer.

## Drivers

For customers who wish to operate the DC power analyzer under computer control, the Keysight N6705 comes with both VXIplug&play drivers and IVI-COM drivers. LabView drivers are available at NI.COM.

## Programming language

The Keysight N6705 supports SCPI (Standard Commands for Programmable Instruments). Its command set is compatible with the N6700 modular power system for ATE, so programs written for it will work on it.

## Firmware updates

The Keysight N6705 firmware is stored in FLASH ROM and can be easily updated when new features become available. Firmware can be downloaded into the Keysight N6705 over GPIB, LAN, or USB using the supplied firmware update utility program. Firmware updates can be found at [www.keysight.com/find/N6705firmware](http://www.keysight.com/find/N6705firmware).

## PW9252A PathWave Advanced Power Control and Analysis

For details, visit [www.keysight.com/find/PW9252A](http://www.keysight.com/find/PW9252A)

## PW9253A PathWave Advanced Battery Test and Emulation

It provides a test environment for you to easily run battery tests, generate battery models, and perform battery emulation. For details, visit [www.keysight.com/find/PW9253A](http://www.keysight.com/find/PW9253A)

## **Makes a great tool for ATE systems that require an advanced user interface for test and debug**

While the Keysight N6705 DC power analyzer is designed primarily as an R&D bench tool, customers building ATE systems may find the Keysight N6705 has great utility in an ATE system. It is fully programmable, LXI class C certified, and takes the same commands as the Keysight N6700. But thanks to its large display and easy to use controls, test engineers may find the Keysight N6705 makes a great tool for visualizing test results as the tests execute, for DUT troubleshooting, for DUT debugging, and for ATE test development. The Keysight N6705 mounts in a standard 19" rack using standard rack mount hardware for 4 U instruments.

## **Achieve correlation and share data between R&D and manufacturing**

The Keysight N6705 DC power analyzer is a modular system that uses the same DC power modules as the N6700 low-profile modular power system for ATE. Customers who use the N6705 in R&D and the N6700 in manufacturing can easily achieve test correlation between R&D testing, design characterization/validation testing, and manufacturing testing because the DC power or load modules are common to both the bench and ATE versions of the product. Test programs can be easily shared between R&D and manufacturing since the Keysight N6705 and the Keysight N6700 share a common command set.

## The power management feature allows you to allocate N6705 mainframe power

Often, a DUT requires some high-power DC sources and several very low-power DC sources. In this case, you may configure a system where the sum of the power modules installed in the Keysight N6705 exceeds the total power available from the Keysight N6705 mainframe. The power management features of the Keysight N6705 allow you to allocate mainframe power to the outputs where it's needed, achieving maximum asset utilization and flexibility. This feature provides safety from unexpected and dangerous shutdowns that can occur with power systems without power management when operated similarly. For example, if your DUT requires 250 W on two of its inputs but only 10 W each on two auxiliary inputs, you can configure a system consisting of two 300 W DC modules and two 50 W DC modules. Although the sum of the module power is greater than 600 W, you can still use the Keysight N6705. Thanks to the power management feature, you can allocate 250 W each to the two 300 W modules while you allocate only 25 W to each of the 50 W modules.

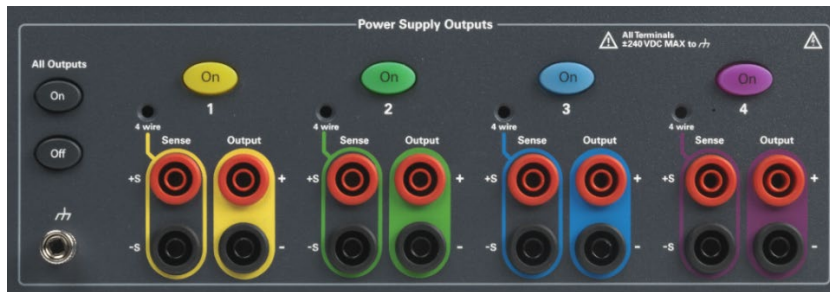


Figure 13. Option RBP recessed binding post

## Universal AC input

The Keysight N6705 has a universal input from 100-240 VAC, 50/60/400 Hz. When switching from one voltage standard to another, there are no switches to set or fuses to change. The AC input employs power factor correction.

# Choosing the Right DC Power or Electronic Load System to Meet Your ATE Needs

## N6790 Electronic Load Series

The new Keysight N6790 Series Modular Electronic Loads offer 100 W and 200 W modules in a 1U footprint. Four different user operation modes are available: constant voltage, constant current, constant resistance, and constant power. Users can easily gain insight into their power supply test with a high-accuracy measurement system and digitizing capabilities. Additionally, the new series features a powerful, built-in arbitrary waveform generator that enables users to simulate complex, dynamic load waveforms. This is a must-have for any serious power system designer and test engineer.



Figure 14a. The Electronic Load Series

## N6750 High-Performance Series

**For applications where the power supply plays a critical role – Now with available power up to 500 W**

The Keysight N6750 Series of high-performance, autoranging DC power modules provides low noise, high accuracy, and programming speeds up to 10 to 50 times faster than other programmable power supplies. Additionally, Keysight has, for the first time, incorporated high-speed test extensions into its general-purpose power supplies. The high-speed test extensions offer an oscilloscope-like digitizer that simplifies system configuration and increases measurement accuracy when viewing high-speed transient or pulse events within the DUT. In addition, autoranging output capabilities enable one power supply to do the job of several traditional power supplies.



**Figure 14b.** The N6753A–N6756A High performance and the N6763A–N6766A Precision DC power modules occupy two module slots within the mainframe. All other modules occupy 1 module slot.

## N6760 Precision Series

**For applications where precision is required – Now with available power up to 500 W**

The Keysight N6760 Series of precision DC power modules provides precise control and measurements in the milliamper and microampere regions. They can simultaneously digitize voltage and current, capturing those measurements in an oscilloscope-like data buffer.

## N6730/40/70 Basic Series

**For basic DC applications – Now with voltages up to 150 V**

The Keysight N6730, N6740, and N6770 Series of DC power modules offer programmable voltage and current, measurement, and protection features at an economical price, making these modules suitable for powering the DUT or providing power for ATE system resources, such as fixture control.



**Figure 14c.** The basic series


## N6780 SMU Series

**For applications where multi-quadrant operation and high precision are required**

For details on these products and their applications, including battery drain analysis and function testing, visit [www.keysight.com/find/N6780](http://www.keysight.com/find/N6780) and download the N6780 Series Source/Measure Units (SMUs) for the N6700 Modular Power System Data Sheet, literature number 5990-5829EN.

## N6783 application-specific series

For details on these products and how they can be used for specific applications, visit [www.keysight.com/find/N6783A-BAT](http://www.keysight.com/find/N6783A-BAT), [www.keysight.com/find/N6783A-MFG](http://www.keysight.com/find/N6783A-MFG), and download the N6783A-BAT Data Sheet, 5990-8662EN, and the N6783A-MFG Data Sheet, 5990-8643EN.

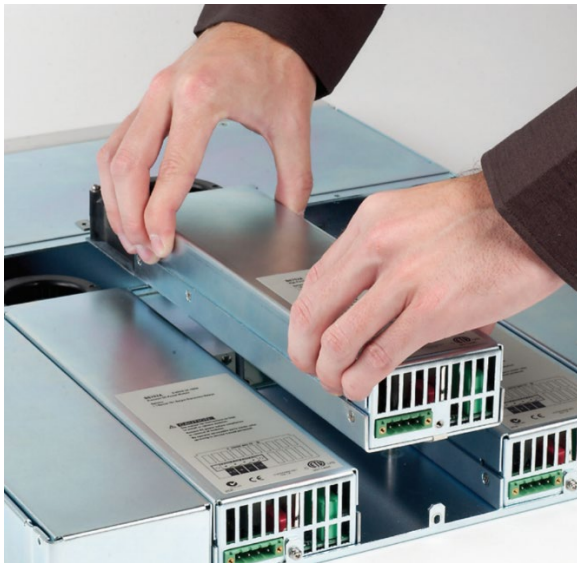

**Figure 14d.** User re-configurable modular system

# DC Electronic Load Module Feature Map

For detailed product specifications and characteristics, refer to the Keysight N6700 Modular Power System Family Specifications Guide at <http://literature.cdn.keysight.com/N6700-90001.pdf>.

Feature (* = available)	Load Module	
	N6791A	N6792A
Input rating <sup>1</sup>	100 W	200 W
Input terminal short capability	•	•
Arbitrary waveform generation	•	•
Under voltage inhibit	•	•
Voltage, current, power, and resistance priority	•	•
Number of resistance input ranges	3	3
Number of current input and measurement ranges	2	2
Number of voltage input and measurement ranges	1	1
Number of power measurement ranges	3	3
Simultaneous voltage and current measurements	•	•
SCPI command output list capability <sup>2</sup>	•	•
SCPI command array readback <sup>2</sup>	•	•
SCPI command programmable sample rate <sup>2</sup>	•	•
SCPI command external data logging <sup>2</sup>	•	•
Double-wide (Occupies two channel locations)		•

1. The load module's input is referred to by the term "Output" throughout this document.
2. Only available when using the remote interfaces, not from the front panel.

# DC Power Module Feature Map

Feature (* = available)	DC power	High-performance	Precision
	N673xB, N674xB, 677xA	N675xA	N676xA
50 W output rating	N6731B – N6736B	N6751A	N6761A
100 W output rating	N6741B – N6746B	N6752A	N6762A
300 W output rating	N6773A – N6777A	N6753A, N6754A	N6763A, N6764A
500 W output rating		N6755A, N6756A	N6765A, N6766A
Output disconnect relays	Option 761	Option 761	Option 761
Output disconnect/polarity reversal relays	Option 760	Option 760	Option 760
Autoranging output capability		•	•
Voltage or current turn-on priority			N6761A, N6762A
Precision voltage and current measurements			•
Low voltage and current output ranges			N6761A, N6762A
Low voltage and current measurement ranges			•
200 $\mu$ A measurement range (N6761A/N6762A only)			Option 2UA
Simultaneous voltage and current scope traces			•
Output list capability (High-speed test extensions)	•	•	•
Array readback capability (High-speed test extensions)	•	•	•
Programmable sample rate (High-speed test extensions)	•	•	•
Double-wide (Occupies two channel locations)		N6753A - N6756A	N6763A - N6766A

Feature (* = available)	Source/measure units (SMU)				Application-specific		
	N6781A	N6785A	N6782A	N6786A	N6784A	N6783A-BAT	N6783A-MFG
Output rating	20 W	80 W	20 W	80 W	20 W	24 W	18 W
2-quadrant operation	*	*	*	*			
4-quadrant operation					*		
Auxiliary voltage measurement input	*	*					
Output disconnect relays	*	*	*	*	*	Option 761	Option 761
Arbitrary waveform generation	*	*	*	*	*	*	*
Negative voltage protection	*	*	*	*	*	*	*
Voltage or current priority mode	*	*	*	*	*		
CC load/CV load	*	*	*	*	*		
Battery emulator/charger	*	*	*	*	*		
Voltage/current measurement only	*	*	*	*	*		
Programmable output resistance	*	*					
600 mV output range	*		*		*		
300 mA output range	*		*				
100 mA, 10 mA output ranges					*		
1 V, 100 mV measurement ranges	*				*		
100 mA, 1 mA, 10 $\mu$ A measurement ranges	*		*		*		
8 A, 100 mA, 1 mA measurement ranges		*		*			
150 mA measurement range						*	*
Voltage or current scope traces	*	*	*	*	*	*	*
Simultaneous voltage and current scope traces	*	*	*	*	*		
Simultaneous voltage and current data logging	*	*	*	*	*		
Interleaved voltage and current data logging						*	*
Seamless measurement autoranging	*	*	*	*			
SCPI command list capability	*	*	*	*	*	*	*
SCPI command array readback	*	*	*	*	*	*	*
SCPI command programmable sample rate	*	*	*	*	*	*	*
SCPI command external data logging	*	*	*	*	*	*	*
SCPI command histogram measurements	*	*	*	*			

# DC Power Module Key Performance Specifications

Note: This data sheet does not include a comprehensive list of all power module specifications and characteristics. Complete performance specifications and supplemental characteristics for all power modules can be found at <http://literature.cdn.keysight.com/litweb/pdf/N6700-90001.pdf>. See the Keysight N6700 Modular Power System Family Specifications Guide, part number N6700-90001.

	DC output ratings (volts/amps/watts)	Ripple & noise (p-p/rms)	Voltage programming accuracy	Current programming accuracy	Voltage measurement accuracy	Current measurement accuracy
N6731B	5 V/10 A/50 W	10 mV/2 mV	0.1% + 19 mV	0.15% + 20 mA	0.1% + 20 mV	0.15% + 20 mA
N6732B	8 V/6.25 A/50 W	12 mV/2 mV	0.1% + 19 mV	0.15% + 20 mA	0.1% + 20 mV	0.15% + 10 mA
N6733B	20 V/2.5 A/50 W	14 mV/3 mV	0.1% + 20 mV	0.15% + 20 mA	0.1% + 20 mV	0.15% + 5 mA
N6734B	35 V/1.5 A/52.5 W	15 mV/5 mV	0.1% + 35 mV	0.15% + 20 mA	0.1% + 35 mV	0.15% + 4 mA
N6735B	60 V/0.8 A/50 W	25 mV/9 mV	0.1% + 60 mV	0.15% + 20 mA	0.1% + 60 mV	0.15% + 4 mA
N6736B	100 V/0.5 A/50 W	30 mV/18 mV	0.1% + 100 mV	0.15% + 10 mA	0.1% + 100 mV	0.15% + 2 mA
N6741B	5 V/20 A/100 W	20 mV/2 mV	0.1% + 19 mV	0.15% + 20 mA	0.1% + 20 mV	0.15% + 20 mA
N6742B	8 V/12.5 A/100 W	12 mV/2 mV	0.1% + 19 mV	0.15% + 20 mA	0.1% + 20 mV	0.15% + 10 mA
N6743B	20 V/5 A/100 W	14 mV/3 mV	0.1% + 20 mV	0.15% + 20 mA	0.1% + 20 mV	0.15% + 5 mA
N6744B	35 V/3 A/105 W	15 mV/5 mV	0.1% + 35 mV	0.15% + 20 mA	0.1% + 35 mV	0.15% + 4 mA
N6745B	60 V/1.6 A/100 W	25 mV/9 mV	0.1% + 60 mV	0.15% + 20 mA	0.1% + 60 mV	0.15% + 4 mA
N6746B	100 V/1 A/100 W	30 mV/18 mV	0.1% + 100 mV	0.15% + 10 mA	0.1% + 100 mV	0.15% + 2 mA
N6751A	50 V/5 A/50 W	4.5 mV/0.35 mV	0.06% + 19 mV	0.1% + 20 mA	0.05% + 20 mV	0.1% + 4 mA
N6752A	50 V/10 A/100 W	4.5 mV/0.35 mV	0.06% + 19 mV	0.1% + 20 mA	0.05% + 20 mV	0.1% + 4 mA
N6753A	20 V/50 A/300 W	5 mV/1 mV	0.06% + 10 mV	0.1% + 30 mA	0.05% + 10 mV	0.1% + 30 mA
N6754A	60 V/20 A/300 W	6 mV/1 mV	0.06% + 25 mV	0.1% + 12 mA	0.05% + 25 mV	0.1% + 8 mA
N6755A	20 V/50 A/500 W	5 mV/1 mV	0.06% + 10 mV	0.1% + 30 mA	0.05% + 10 mV	0.1% + 30 mA
N6756A	60 V/17 A/500 W	6 mV/1 mV	0.06% + 25 mV	0.1% + 12 mA	0.05% + 25 mV	0.1% + 8 mA
N6761A <sup>1</sup>	50 V/1.5 A/50 W	4.5 mV/0.35 mV	0.016% + 6 mV	0.04% + 0.2 mA	0.016% + 6 mV	0.04% + 0.16 mA
N6762A <sup>1</sup>	50 V/3 A/100 W	4.5 mV/0.35 mV	0.016% + 6 mV	0.04% + 0.2 mA	0.016% + 6 mV	0.04% + 0.16 mA
N6763A <sup>1</sup>	20 V/50 A/300 W	5 mV/1 mV	0.03% + 5 mV	0.1% + 15 mA	0.03% + 10 mV	0.1% + 10 mA
N6764A <sup>1</sup>	60 V/20 A/300 W	6 mV/1 mV	0.03% + 12 mV	0.1% + 15 mA	0.03% + 25 mV	0.1% + 5 mA
N6765A <sup>1</sup>	20 V/50 A/500 W	5 mV/1 mV	0.03% + 5 mV	0.1% + 15 mA	0.03% + 10 mV	0.1% + 10 mA
N6766A <sup>1</sup>	60 V/17 A/500 W	6 mV/1 mV	0.03% + 12 mV	0.1% + 15 mA	0.03% + 25 mV	0.1% + 5 mA
N6773A	20 V/15 A/300 W	20 mV/3 mV	0.1% + 20 mV	0.15% + 60 mA	0.1% + 20 mV	0.15% + 15 mA
N6774A	35 V/8.5 A/300 W	22 mV/5 mV	0.1% + 35 mV	0.15% + 60 mA	0.1% + 35 mV	0.15% + 12 mA
N6775A	60 V/5 A/300 W	35 mV/9 mV	0.1% + 60 mV	0.15% + 60 mA	0.1% + 60 mV	0.15% + 12 mA
N6776A	100 V/3 A/300 W	45 mV/18 mV	0.1% + 100 mV	0.15% + 30 mA	0.1% + 100 mV	0.15% + 6 mA
N6777A	150 V/2 A/300 W	68 mV/27 mV	0.1% + 150 mV	0.15% + 30 mA	0.1% + 150 mV	0.15% + 6 mA
N6781A <sup>1</sup>	20 V/± 3 A/20 W	12 mV/1.2 mV	0.025% + 1.8 mV	0.04% + 0.3 mA	0.025% + 1.2 mV	0.03% + 0.25 mA
N6782A <sup>1</sup>	20 V/± 3 A/20 W	12 mV/1.2 mV	0.025% + 1.8 mV	0.04% + 0.3 mA	0.025% + 1.2 mV	0.03% + 0.25 mA
N6784A <sup>1</sup>	± 20 V/± 3 A/20 W	12 mV/1.2 mV	0.025% + 1.8 mV	0.04% + 0.3 mA	0.025% + 1.2 mV	0.03% + 0.25 mA
N6783A-BAT <sup>2</sup>	8 V/-2 A to 3 A/24 W	8 mV/1.5 mV	0.1% + 10 mV	0.1% + 1.8 mA	0.05% + 5 mV	0.1% + 0.6 mA
N6783A-MFG <sup>2</sup>	6 V/-2 A; 3 A/18 W	8 mV/1.5 mV	0.1% + 10 mV	0.1% + 1.8 mA	0.05% + 5 mV	0.1% + 0.6 mA
N6785A <sup>1</sup>	20 V/+/-8 A/80 W	15 mV/1.5 mV	0.025%+1.8 mV	0.04%+1.5 mA	0.025%+1.8 mV	0.04%+1.5 mA
N6786A <sup>1</sup>	20 V/+/-8 A/80 W	15 mV/1.5 mV	0.025%+1.8 mV	0.04%+1.5 mA	0.025%+1.8 mV	0.04%+1.5 mA

1. These power modules have multiple output and measurement ranges; the values shown are for the highest range.
2. These power modules have multiple measurement ranges; the values shown are for the highest range.

# DC Electronic Load Module Key Performance Specifications

Note: This data sheet does not include a comprehensive list of all power module specifications and characteristics. Complete performance specifications and supplemental characteristics for all power modules can be found at <http://literature.cdn.keysight.com/litweb/pdf/N6700-90001.pdf>. See the Keysight N6700 Modular Power System Family Specifications Guide, part number N6700-90001.

Performance Specifications		N6791A	N6792A
Input Ratings			
Current		0 - 20 A	0 - 40 A
Voltage		0 - 60 V	0 - 60 V
Maximum Power @ 40 °C		100 W	200 W
Specified Current @ Low Voltage Operation			
1.6 V		20 A	40 A
1 V		12.5 A	25 A
0.5 V		6.25 A	12.5 A
0.1 V		1.25 A	2.5 A
Programming Accuracy			
Current high range	20 A/40 A	0.04 % + 2.6 mA	0.04 % + 5.2 mA
Current low range	2 A/4 A	0.04 % + 0.46 mA	0.04 % + 0.92 mA
Voltage	60 V	0.03 % + 7.2 mV	0.03 % + 7.2 mV
Resistance high range	8 k $\Omega$	$\pm$ (0.1 % + 0.0014) S	$\pm$ (0.1 % + 0.0028) S
Resistance medium range	100 $\Omega$	$\pm$ (0.1 % + 0.014) S	$\pm$ (0.1 % + 0.019) S
Resistance low range	3 $\Omega$	$\pm$ (0.1 % + 0.38) S	$\pm$ (0.1 % + 0.55) S
Power high range	100 W/200 W	0.06 % + 180 mW	0.06 % + 360 mW
Power low range	10 W/20 W	0.06 % + 30 mW	0.06 % + 65 mW
Measurement Accuracy			
Current high range	20 A/40 A	0.04 % + 2.4 mA	0.04 % + 4.6 mA
Current low range	2 A/4 A	0.04 % + 0.40 mA	0.04 % + 0.82 mA
Voltage	60 V	0.03 % + 7.2 mV	0.03 % + 7.2 mV
Power high range	100 W/200 W	0.06 % + 160 mW	0.06 % + 320 mW
Power low range	10 W/20 W	0.06 % + 25 mW	0.06 % + 50 mW

# DC Power Analyzer Mainframe Key Characteristics

Interface capabilities	
GPIO	SCPI – 1993, IEEE 488.2 compliant interface
LXI compliance	Class C
USB 2.0	Requires Keysight IO Library version M.01.01 or 14.0 and up
10/100 LAN	Requires Keysight IO Library version L.01.01 or 14.0 and up
Environmental conditions	
Operating environment	Indoor use, installation category II (for AC input), pollution degree 2
Temperature range	0 °C to 55 °C (output current is derated 1% per °C above 40 °C ambient temperature)
Relative humidity	Up to 95%
Altitude	Up to 2000 meters
AC input	
Input ratings	~ 100 VAC – 240 VAC; 50/60/400 Hz
Power consumption	1440 VA
Power factor	0.99 @ nominal input and rated power
Net weight	
N6705 with 4 modules (typical)	16 kg/35 lbs
Dimensions	
Height/width/depth	194.7 mm/425.6 mm/313 mm 7.665 in./16.756 in./12.319 in.

# Ordering Information

## The DC power analyzer system is available in 2 ways

1. You can order the N6705C mainframe and various modules separately. (See steps below.) Each item will arrive in a separate box, allowing you to assemble the system yourself.
2. You can order an N6715C system, a build-to-order DC power analyzer system shipped as a fully assembled multiple-output power supply or load. See page 33 for ordering information.

Follow these steps when ordering the DC power analyzer as a mainframe and modules.

### Step 1

Select the appropriate documentation and line cord options.

### Step 2

Order one to four modules (see next page). If the sum of the power of the modules exceeds the available output power rating on the mainframe, see page 21 for an explanation of Keysight's power management capability. Note that each mainframe has 4 module slots to hold modules. Each module occupies

one module slot, except for the N6753A-N6756A, N6763A-N6766A, N6785A-N6786A and N6792A which occupy two module slots.

Mainframe	
N6705C	DC power analyzer mainframe Holds 1 to 4 modules. Total available output power = 600 W <b>Note:</b> Linux OS boot time may take up to 2 minutes.
Available options to the N6705C mainframe	
1CM113A	Rack mount kit
	Delete front/rear USB
AKY	This option removes all USB capability from the DC power analyzer. Both the front panel USB port and the rear panel USB port are removed.
	Delete data logger
055	This option disables the data logger functionality in the DC power analyzer firmware. The DC power analyzer hardware is unchanged. To enable the data logger functionality at a later time, order the N6705U upgrade kit.
ABA	Full documentation on CD-ROM and a printed user's guide
RBP	Recessed binding post
900	Power cord, United Kingdom, P/N 8120-1351
901	Power cord, Australia, New Zealand, P/N 8120-1369
902	Power cord, Europe, Korea, P/N 8120-1689
903	Power cord, USA, Canada, 120 V, P/N 8120-4383
904	Power cord, USA, Canada, 240 V, P/N 8120-0698
906	Power cord, Switzerland, P/N 8120-2104
912	Power cord, Denmark, P/N 8120-2956
917	Power cord, South Africa, India, P/N 8120-4211
918	Power cord, Japan, 100 V, P/N 8120-5342
919	Power cord, Israel, P/N 8120-6800
920	Power cord, Argentina, P/N 8120-6869

921	Power cord, Chile, P/N 8120-6980
922	Power cord, China, P/N 8120-8376
927	Power cord, Thailand, Brazil, P/N 8120-8871
<b>Upgrade</b>	
N6705U-001	Add data logger
	This option activates the data logger functionality in the DC power analyzer firmware. The DC power analyzer hardware is unchanged.
PW9252A	PathWave Advanced Power Control and Analysis
PW9253A	PathWave Advanced Battery Test and Emulation

For more information, visit [www.keysight.com/find/N6705U](http://www.keysight.com/find/N6705U)

## Modules

Order one to four modules to be installed in each N6705C power analyzer mainframe. (To order modules as part of the N6715C, build-to-order systems, see page 33). If the sum of the power of the modules exceeds the available output power rating on the mainframe, see page 21 for an explanation of Keysight's power management capability.

You can individually specify each option for each module. For example, you can order one module with Option 761 Output Disconnect Relays while the remaining modules have no relay options.

As your needs change and you want to change the configuration or add more modules to the existing N6705 mainframe, use this ordering information to order the required modules.

<b>Modules</b>		
N6730 50 W DC power modules	N6731B	5 V, 10 A, 50 W DC power module
	N6732B	8 V, 6.25 A, 50 W DC power module
	N6733B	20 V, 2.5 A, 50 W DC power module
N6730 50 W DC power modules	N6734B	35 V, 1.5 A, 50 W DC power module
	N6735B	60 V, 0.8 A, 50 W DC power module
	N6736B	100 V, 0.5 A, 50 W DC power module
N6740 100 W DC power modules	N6741B	5 V, 20 A, 100 W DC power module
	N6742B	8 V, 12.5 A, 100 W DC power module
	N6743B	20 V, 5 A, 100 W DC power module
	N6744B	35 V, 3 A, 100 W DC power module
	N6745B	60 V, 1.6 A, 100 W DC power module
N6750 high-performance, auto-ranging DC power modules	N6746B	100V, 1A, 100W DC power module
	N6751A	50 V, 5 A, 50 W high-performance autoranging DC power module
	N6752A	50 V, 10 A, 100 W high-performance autoranging DC power module
	N6753A	20 V, 50 A, 300 W high-performance autoranging DC power module (occupies 2 of 4 mainframe slots)
	N6754A	60 V, 20 A, 300 W high-performance autoranging DC power module (occupies 2 of 4 mainframe slots)
	N6755A	20 V, 50 A, 500 W high-performance autoranging DC power module (occupies 2 of 4 mainframe slots)
N6760 precision DC power modules	N6756A	60 V, 17 A, 500 W high-performance autoranging DC power module (occupies 2 of 4 mainframe slots)
	N6761A	50 V, 1.5 A, 50 W precision DC power module
	N6762A	50 V, 3 A, 100 W precision DC power module
	N6763A	20 V, 50 A, 300 W precision DC power module (occupies 2 of 4 mainframe slots)
	N6764A	60 V, 20 A, 300 W precision DC power module (occupies 2 of 4 mainframe slots)
	N6765A	20 V, 50 A, 500 W precision DC power module (occupies 2 of 4 mainframe slots)
	N6766A	60 V, 17 A, 500 W precision DC power module (occupies 2 of 4 mainframe slots)
	N6773A	20 V, 15 A, 300 W DC power module

N6770 300 W DC power modules	N6774A	35 V, 8.5 A, 300 W DC power module
	N6775A	60 V, 5 A, 300 W DC power module
	N6776A	100 V, 3 A, 300 W DC power module
	N6777A	150 V, 2 A, 300 W DC power module
N6780 ~80 W application-specific modules	N6781A	20 V, $\pm 3$ A, 20 W source/measure unit
	N6782A	20 V, $\pm 3$ A, 20 W source/measure unit
	N6784A	$\pm 20$ V, $\pm 3$ A, 20 W source/measure unit
	N6783A-BAT	8 V, 3 A, 24 W battery charge/discharge module
N6790 DC electronic load modules	N6783A-MFG	6 V, 3 A, 18 W mobile communications module
	N6785A	20 V, $\pm 8$ A, 80 W source/measure unit
	N6786A	20 V, $\pm 8$ A, 80 W source/measure unit
	N6791A	60 V, 20 A, 100 W DC electronic load
	N6792A	60 V, 40 A, 200 W DC electronic load

	N6731B- N6736B 50 W DC power modules	N6741B- N6746B 100 W DC power modules	N6751A- N6756A high- performan ce autorangin g DC power modules	N6761A- N6766A precision DC power modules	N6773A- N6776A 300 W DC power modules	N6781A, N6782A, N6784A N6785A N6786A SMU modules	N6783A- BAT N6783A- MFG application -specific	N6790 Series Electronic Loads
Output disconnect relays	761	761	761	761	761	Standard	761	Not available
Output disconnect and polarity reversal relays	760	760 <sup>1,2</sup>	760 <sup>1</sup>	760 <sup>1</sup>	760 <sup>2</sup>	Not available	Not available	Not available
High-speed test extensions (HSTE)	054	054	054	Standard	054	Standard	Standard	Standard
200-microampere measurement range	Not available	Not available	Not available	2UA <sup>3</sup>	Not available	Not available	Not available	Not available
Commercial calibration with test results data	UK6	UK6	UK6	UK6	UK6	UK6	UK6	UK6
ISO 17025 calibration certificate	1A7	1A7	1A7	1A7	1A7	Not available	1A7	1A7

1. Option 760 is not available on Models N6741B, N6751A, N6752A, N6761A, N6762A.
2. Option 760 limits the output current to 10 A maximum on Models N6742B and N6773A.
3. Option 2UA is only available on Models N6761A and N6762A.

## N6715C build-to-order system

To purchase a DC power analyzer, order an N6715C. This model represents a build-to-order system that is shipped as a fully tested and assembled instrument. Each system consists of one mainframe, plus optionally one to four modules. Each mainframe has 4 module slots to hold modules. Each module occupies one module slot, except for the N6753A–N6755A, N6763A–N6766A, and N6792A, which occupy two module slots. To specify which modules you want installed in the system, the modules are ordered as options to the system model number. You must order at least one module.

If the sum of the modules' power exceeds the mainframe's available output power rating, see page 21 for an explanation of Keysight's power management capability.

If you prefer to purchase a DC power analyzer mainframe and modules separately, see page 27.

Build-to-order system	
N6715C	Build-to-order DC power analyzer system, Consists of 1 N6705C mainframe with a total available power of 600 W <b>Note:</b> Linux OS boot time may take up to 2 minutes.
Available options for the N6715C system	
1CM113A	Rack mount kit
AKY	Delete front/rear USB This option removes all USB capability from the DC power analyzer. Both the front panel USB port and the rear panel USB port are removed.
ABA	Full documentation on CD-ROM and a printed user's guide
RBP	Recessed binding post
900	Power cord, United Kingdom, P/N 8120-1351
901	Power cord, Australia, New Zealand, P/N 8120-1369
902	Power cord, Europe, Korea, P/N 8120-1689
903	Power cord, USA, Canada, 120 V, P/N 8120-4383
904	Power cord, USA, Canada, 240 V, P/N 8120-0698
906	Power cord, Switzerland, P/N 8120-2104
912	Power cord, Denmark, P/N 8120-2956
917	Power cord, South Africa, India, P/N 8120-4211
918	Power cord, Japan, 100 V, P/N 8120-5342
919	Power cord, Israel, P/N 8120-6800
920	Power cord, Argentina, P/N 8120-6869
921	Power cord, Chile, P/N 8120-6980
922	Power cord, China, P/N 8120-8376
927	Power cord, Thailand, Brazil, P/N 8120-8871
PW9252A	PathWave Advanced Power Control and Analysis
PW9253A	PathWave Advanced Battery Test and Emulation

## Modules as options to N6715C

Order 1 to 4 modules as options to an N6715C, specify its model number, followed by “–ATO.” For example, to order an N6731B as an option to the N6715C, you would specify “–ATO.” For example, to order an N6731B as an option to the N6715C, you would specify “N6731B–ATO” as the option. (To order modules as separate products, see pages 31 - 32). If the sum of the power of the modules exceeds the available output power rating on the mainframe, see page 21 for an explanation of Keysight’s power management capability.

You can individually specify each option for each module. For example, you can order one module with Option 761 Output Disconnect Relays while the remaining modules have no relay options.

Module options for the N6715C system		
N6730 50 W DC power modules	N6731B-ATO	5 V, 10 A, 50 W DC power module
	N6732B-ATO	8 V, 6.25 A, 50 W DC power module
	N6733B-ATO	20 V, 2.5 A, 50 W DC power module
	N6734B-ATO	35 V, 1.5 A, 50 W DC power module
	N6735B-ATO	60 V, 0.8 A, 50 W DC power module
	N6736B-ATO	100 V, 0.5 A, 50 W DC power module
N6740 100 W DC power modules	N6741B-ATO	5 V, 20 A, 100 W DC power module
	N6742B-ATO	8 V, 12.5 A, 100 W DC power module
	N6743B-ATO	20 V, 5 A, 100 W DC power module
	N6744B-ATO	35 V, 3 A, 100 W DC power module
	N6745B-ATO	60 V, 1.6 A, 100 W DC power module
	N6746B-ATO	100V, 1A, 100W DC power module
N6750 high-performance, auto-ranging DC power modules	N6751A-ATO	50 V, 5 A, 50 W high-performance autoranging DC power module
	N6752A-ATO	50 V, 10 A, 100 W high-performance autoranging DC power module
	N6753A-ATO	20 V, 50 A, 300 W high-performance autoranging DC power module (occupies 2 of 4 mainframe slots)
	N6754A-ATO	60 V, 20 A, 300 W high-performance autoranging DC power module (occupies 2 of 4 mainframe slots)
	N6755A-ATO	20 V, 50 A, 500 W high-performance autoranging DC power module (occupies 2 of 4 mainframe slots)
	N6756A-ATO	60 V, 17 A, 500 W high-performance autoranging DC power module (occupies 2 of 4 mainframe slots)
N6760 precision DC power modules	N6761A-ATO	50 V, 1.5 A, 50 W precision DC power module
	N6762A-ATO	50 V, 3 A, 100 W precision DC power module
	N6763A-ATO	20 V, 50 A, 300 W precision DC power module (occupies 2 of 4 mainframe slots)
	N6764A-ATO	60 V, 20 A, 300 W precision DC power module (occupies 2 of 4 mainframe slots)
	N6765A-ATO	20 V, 50 A, 500 W precision DC power module (occupies 2 of 4 mainframe slots)
	N6766A-ATO	60 V, 17 A, 500 W precision DC power module (occupies 2 of 4 mainframe slots)
N6770 300 W DC power modules	N6773A-ATO	20 V, 15 A, 300 W DC power module
	N6774A-ATO	35 V, 8.5 A, 300 W DC power module
	N6775A-ATO	60 V, 5 A, 300 W DC power module
	N6776A-ATO	100 V, 3 A, 300 W DC power module
	N6777A-ATO	150 V, 2 A, 300 W DC power module
	N6781A-ATO	20 V, $\pm 3$ A, 20 W source/measure unit
N6780 up to 80 W application-specific modules	N6782A-ATO	20 V, $\pm 3$ A, 20 W source/measure unit
	N6784A-ATO	$\pm 20$ V, $\pm 3$ A, 20 W source/measure unit
	N6785A-ATO	20 V, $\pm 8$ A, 80 W source/measure unit
	N6786A-ATO	20 V, $\pm 8$ A, 80 W source/measure unit
	N6783A-BAT	8 V, 3 A, 24 W battery charge/discharge module
	N6783A-MFG	6 V, 3 A, 18 W mobile communications module
N6790 DC electronic load module	N6791A-ATO	60 V, 20 A, 100 W DC electronic load
	N6792A-ATO	60 V, 40 A, 200 W DC electronic load

# Need a Power Solution for ATE?

The Keysight N6700 modular power analyzer is small, flexible, and fast

- Ideal for ATE systems in R&D, design validation, and manufacturing
- Small size: Up to 4 outputs in 1U of rack space
- Flexible, modular system: You can mix and match power levels and performance levels to optimize your investment
- Uses the same modules as the N6705 DC Power Analyzer
- Fast command processing time to improve throughput
- Connect via GPIB, LAN, or USB
- Fully compliant to LXI Class C specification
- Electronic loads up to 200 W

Complete specifications can be found in the N6700 Modular Power System Data Sheet, publication 5992-1857EN.



Mess- und Prüftechnik. Die Experten.

**Ihr Ansprechpartner /  
Your Partner:**

**dataTec AG**

E-Mail: [info@datatec.eu](mailto:info@datatec.eu)

>>> [www.datatec.eu](http://www.datatec.eu)



Keysight enables innovators to push the boundaries of engineering by quickly solving design, emulation, and test challenges to create the best product experiences. Start your innovation journey at [www.keysight.com](http://www.keysight.com).

This information is subject to change without notice. © Keysight Technologies, 2018 – 2025, Published in USA, July 10, 2025, 5992-1880EN