

# MXO 5 Series OSCILLOSCOPE

## Specifications

**dataTec**


Mess- und Prüftechnik. Die Experten.

**Ihr Ansprechpartner /  
Your Partner:**

**dataTec AG**

E-Mail: [info@datatec.eu](mailto:info@datatec.eu)

[>>> www.datatec.eu](http://www.datatec.eu)

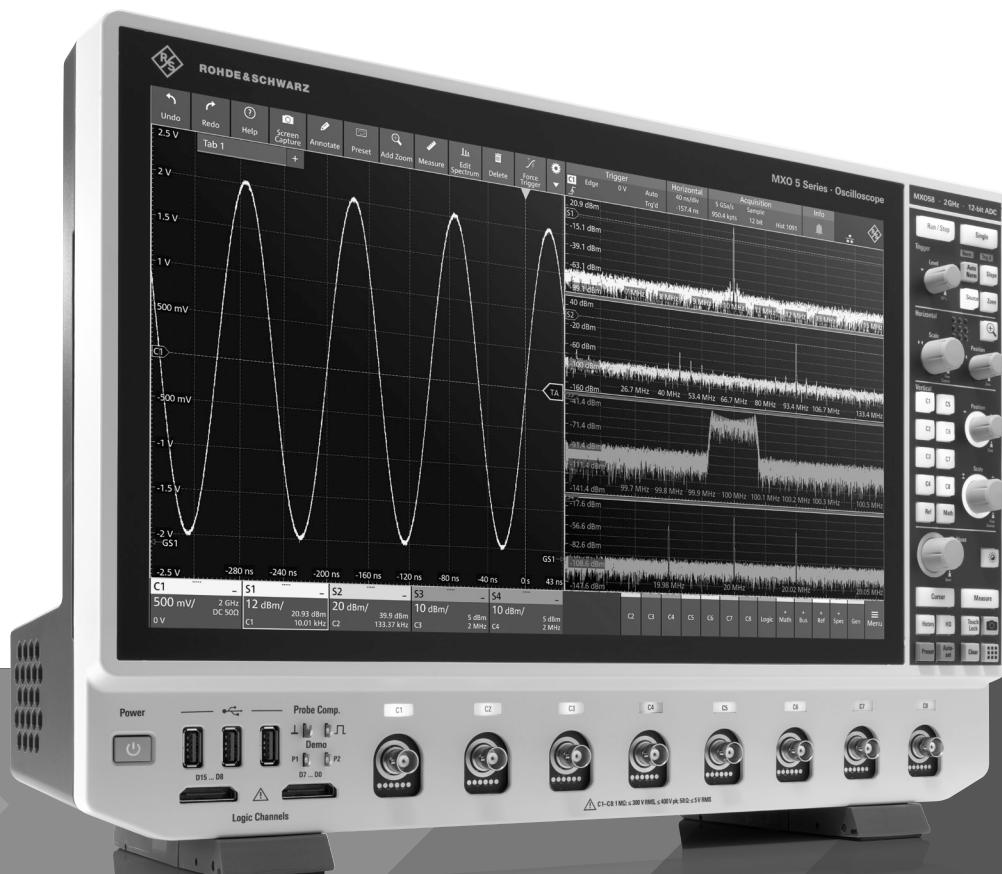

Specifications  
Version 14.00

**ROHDE & SCHWARZ**

Make ideas real



## CONTENTS

<b>Definitions</b> .....	3
<b>Base unit</b> .....	4
Vertical system: analog channels .....	4
Vertical system: digital channels .....	6
Horizontal system .....	7
Acquisition system .....	7
High definition mode .....	8
Trigger system .....	8
Spectrum analysis .....	10
RF characteristics .....	10
Waveform measurements .....	11
Waveform math .....	11
Digital voltmeter .....	12
Display characteristics .....	12
History and segmented memory .....	12
Mask testing .....	13
R&S®ScopeSync .....	13
Miscellaneous .....	13
Input and output .....	14
<b>General data</b> .....	15
<b>Options</b> .....	17
R&S®MXO5-B1 mixed signal option .....	17
R&S®MXO5-B6 arbitrary waveform generator .....	17
R&S®MXO5-K12 basic jitter analysis .....	19
R&S®MXO5-K31 power analysis .....	20
R&S®MXO5-K36 frequency response analysis .....	20
R&S®MXO5-K136 eye analysis .....	21
R&S®MXO5-K500 bus analysis .....	21
R&S®MXO5-K510 low speed serial buses .....	22
R&S®MXO5-K520 automotive protocols .....	27
R&S®MXO5-K530 aerospace protocols .....	31
R&S®MXO5-K550 MIPI low speed protocols .....	32
R&S®MXO5-K560 automotive Ethernet protocols .....	36
R&S®MXO5-K570 USB protocols .....	38
<b>Ordering information</b> .....	39
<b>Warranty and service</b> .....	41

# Definitions


## General

Product data applies under the following conditions:

- Three hours of storage at ambient temperature followed by 60 minutes of warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

## Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$  or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

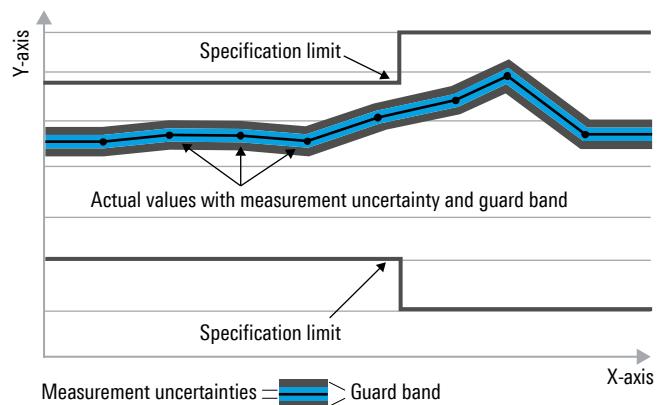

## Non-traceable specifications with limits (n. trc.)

Represent product performance that is specified and tested as described under "Specifications with limits" above. However, product performance in this case cannot be warranted due to the lack of measuring equipment traceable to national metrology standards. In this case, measurements are referenced to standards used in the Rohde & Schwarz laboratories.

## Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value, e.g. dimensions or resolution of a setting parameter. Compliance is ensured by design.

## Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

## Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter, e.g. nominal impedance. In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

## Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

## Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are designated with the format "parameter: value".

Non-traceable specifications with limits, typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

In line with the 3GPP standard, chip rates are specified in million chips per second (Mcps), whereas bit rates and symbol rates are specified in billion bit per second (Gbps), million bit per second (Mbps), thousand bit per second (kbps), million symbols per second (Msps) or thousand symbols per second (ksps), and sample rates are specified in million samples per second (Msample/s). Gbps, Mcps, Mbps, Msps, kbps, ksps and Msample/s are not SI units.

# Base unit

## Vertical system: analog channels

Input channels	4 channels or 8 channels	
Input impedance	$50 \Omega \pm 1.5 \%$ , $1 M\Omega \pm 1 \% \parallel 12 \text{ pF}$ (meas.)	
Analog bandwidth (−3 dB)	4-channel instrument at $50 \Omega$ input impedance MXO 54 $\geq 350 \text{ MHz}$ MXO 54 with -B245 option $\geq 500 \text{ MHz}$ MXO 54 with -B2410 option $\geq 1 \text{ GHz}$ MXO 54 with -B2420 option $\geq 2 \text{ GHz}$  at $1 M\Omega$ input impedance MXO 54 $\geq 350 \text{ MHz}$ (meas.) MXO 54 with -B245 option $\geq 500 \text{ MHz}$ (meas.) MXO 54 with -B2410 option $\geq 700 \text{ MHz}$ (meas.) <sup>1</sup> MXO 54 with -B2420 option $\geq 700 \text{ MHz}$ (meas.) <sup>1</sup>  8-channel instrument at $50 \Omega$ input impedance MXO 58 $\geq 100 \text{ MHz}$ MXO 58 with -B282 option $\geq 200 \text{ MHz}$ MXO 58 with -B283 option $\geq 350 \text{ MHz}$ MXO 58 with -B285 option $\geq 500 \text{ MHz}$ MXO 58 with -B2810 option $\geq 1 \text{ GHz}$ MXO 58 with -B2820 option $\geq 2 \text{ GHz}$ <sup>2</sup>  at $1 M\Omega$ input impedance MXO 58 $\geq 100 \text{ MHz}$ (meas.) MXO 58 with -B282 option $\geq 200 \text{ MHz}$ (meas.) MXO 58 with -B283 option $\geq 350 \text{ MHz}$ (meas.) MXO 58 with -B285 option $\geq 500 \text{ MHz}$ (meas.) MXO 58 with -B2810 option $\geq 700 \text{ MHz}$ (meas.) <sup>1</sup> MXO 58 with -B2820 option $\geq 700 \text{ MHz}$ (meas.) <sup>1</sup>	
Additional bandwidth filters available up to instrument bandwidth	1 GHz, 500/350/200/100/50/20 MHz (meas.)	
Rise/fall time (calculated)	10 % to 90 % at $50 \Omega$ 4-channel instrument MXO 54 $< 1.75 \text{ ns}$ MXO 54 with -B245 option $< 700 \text{ ps}$ MXO 54 with -B2410 option $< 350 \text{ ps}$ MXO 54 with -B2420 option $< 175 \text{ ps}$  8-channel instrument MXO 58 $< 3.5 \text{ ns}$ MXO 58 with -B282 option $< 1.75 \text{ ns}$ MXO 58 with -B283 option $< 1 \text{ ns}$ MXO 58 with -B285 option $< 700 \text{ ps}$ MXO 58 with -B2810 option $< 350 \text{ ps}$ MXO 58 with -B2820 option $< 175 \text{ ps}$ <sup>2</sup> (interleaved), $< 350 \text{ ps}$ (non-interleaved)	
Vertical resolution	12 bit, 18 bit for high definition (HD) mode	
Effective number of bits (meas.)	at $50 \Omega$ , 50 mV/div, with HD mode and digital filters, 10 MHz sine signal with 80 % full-scale 10 MHz 10.0 20 MHz 9.6 100 MHz 8.7 200 MHz 8.3 300 MHz 8.0 500 MHz 7.7 1 GHz 7.0	

<sup>1</sup> With R&S®RT-ZP11 passive probe.<sup>2</sup> 2 GHz analog bandwidth in interleave mode with 5 Gsample/s real-time sampling rate.

Input sensitivity	at 50 $\Omega$	0.5 mV/div to 3 V/div, entire analog bandwidth supported for all input sensitivities
	at 1 M $\Omega$	0.5 mV/div to 10 V/div, entire analog bandwidth supported for all input sensitivities
DC gain accuracy	offset and position set to 0 V, after self-alignment	
	input sensitivity > 5 mV/div	$\pm 1\%$ full scale
	input sensitivity $\leq$ 5 mV/div to $\geq$ 1 mV/div	$\pm 1.5\%$ full scale
	input sensitivity 500 $\mu$ V/div	$\pm 2.5\%$ full scale
Input coupling	at 50 $\Omega$	DC
	at 1 M $\Omega$	DC, AC (> 7 Hz)
Maximum input voltage	at 50 $\Omega$	5 V (RMS), 30 V ( $V_p$ )
	at 1 M $\Omega$	300 V (RMS), 400 V ( $V_p$ ), derates at 20 dB/decade to 5 V (RMS) above 250 kHz
	at 1 M $\Omega$ with R&S®RT-ZP11 passive probe	400 V (RMS), 1650 V ( $V_p$ ), 300 V (RMS) CAT II; for derating and details, see R&S®RT-Zxx Standard Probes specifications (PD 3607.3851.22)
		$\pm 5$ div
Position range		
Offset range at 50 $\Omega$	input sensitivity	
	120 mV/div to 3 V/div	$\pm(15\text{ V} - \text{input sensitivity} \times \text{position})$
	33 mV/div to < 120 mV/div	$\pm(7\text{ V} - \text{input sensitivity} \times \text{position})$
	0.5 mV/div to < 33 mV/div	$\pm(2\text{ V} - \text{input sensitivity} \times \text{position})$
Offset range at 1 M $\Omega$	input sensitivity	
	800 mV/div to 10 V/div	$\pm 200\text{ V}$
	80 mV/div to < 800 mV/div	$\pm 50\text{ V}$
	0.5 mV/div to < 80 mV/div	$\pm(5\text{ V} - \text{input sensitivity} \times \text{position})$
Offset accuracy		$\pm(0.35\% \times  \text{net offset}  +$ $0.5\text{ mV} + 0.1\text{ div} \times \text{input sensitivity})$ ; (net offset = offset – position $\times$ input sensitivity)
DC measurement accuracy	after adequate suppression of measurement noise using high definition (HD) mode or waveform averaging or a combination of both	$\pm(\text{DC gain accuracy} \times$ $ \text{reading} - \text{net offset} $ + offset accuracy)
Channel-to-channel isolation (each channel at same input sensitivity)	input frequency inside instrument bandwidth	> 60 dB (1:1000)

RMS noise floor <sup>3</sup>						
100 MHz	200 MHz	350 MHz	500 MHz	1 GHz		
0.5 mV/div	19 μV	26 μV	33 μV	39 μV	66 μV	
1 mV/div	24 μV	33 μV	42 μV	51 μV	85 μV	
2 mV/div	25 μV	35 μV	44 μV	53 μV	89 μV	
5 mV/div	34 μV	46 μV	59 μV	71 μV	116 μV	
10 mV/div	66 μV	89 μV	115 μV	138 μV	226 μV	
20 mV/div	134 μV	181 μV	233 μV	280 μV	461 μV	
50 mV/div	324 μV	436 μV	563 μV	677 μV	1.12 mV	
100 mV/div	610 μV	815 μV	1.05 mV	1.26 mV	2.08 mV	
200 mV/div	1.26 mV	1.69 mV	2.17 mV	2.60 mV	4.31 mV	
500 mV/div	4.21 mV	5.54 mV	6.94 mV	8.21 mV	12.93 mV	
1 V/div	6.88 mV	9.20 mV	11.71 mV	14.02 mV	22.57 mV	
At 1 MΩ (meas.)	Input sensitivity	Analog bandwidth (-3 dB)				
		100 MHz	200 MHz	350 MHz	500 MHz	700 MHz
	0.5 mV/div	35 μV	40 μV	46 μV	54 μV	85 μV
	1 mV/div	36 μV	42 μV	49 μV	57 μV	89 μV
	2 mV/div	38 μV	45 μV	54 μV	64 μV	101 μV
	5 mV/div	47 μV	58 μV	77 μV	92 μV	141 μV
	10 mV/div	68 μV	89 μV	126 μV	152 μV	229 μV
	20 mV/div	120 μV	161 μV	235 μV	285 μV	428 μV
	50 mV/div	297 μV	401 μV	592 μV	719 μV	1.08 mV
	100 mV/div	678 μV	892 μV	1.25 mV	1.47 mV	2.16 mV
	200 mV/div	1.21 mV	1.62 mV	2.33 mV	2.77 mV	4.09 mV
	500 mV/div	2.88 mV	3.88 mV	5.68 mV	6.76 mV	10.01 mV
	1 V/div	6.11 mV	8.08 mV	11.54 mV	13.56 mV	18.51 mV
	2 V/div	11.42 mV	15.20 mV	22.04 mV	25.98 mV	35.39 mV
	5 V/div	29.10 mV	38.75 mV	56.46 mV	66.60 mV	90.40 mV
	10 V/div	44.33 mV	58.62 mV	85.77 mV	101.12 mV	137.86 mV

## Vertical system: digital channels

Input channels		16 logic channels (D0 to D15)
Arrangement of input channels		arranged in two logic probes with 8 channels each, assignment of the logic probes to the channels (D0 to D7 and D8 to D15) is displayed on the probe
Input impedance		100 kΩ ± 2 %    ~4 pF (meas.) at probe tips
Maximum input frequency	signal with minimum input voltage swing and hysteresis setting: normal	400 MHz (meas.)
Maximum input voltage		±40 V ( $V_p$ ); 32 V (RMS), derates to 7 V (RMS) with 20 dB/decade at frequencies above 25 MHz
Minimum input voltage swing		500 mV ( $V_{pp}$ ) (meas.)
Threshold groups		D0 to D3, D4 to D7, D8 to D11 and D12 to D15
Threshold level	range	±8 V in 25 mV steps
	predefined	CMOS 5.0 V, CMOS 3.3 V, CMOS 2.5 V, TTL, ECL, PECL, LVPECL
Threshold accuracy	threshold level between ±4 V	±(100 mV + 3 % of threshold setting)
Comparator hysteresis		normal, robust, maximum

<sup>3</sup> HD mode active for bandwidth ≤ 500 MHz.

## Horizontal system

Timebase range		selectable between 200 ps/div and 10000 s/div, time per div settable to any value within range
Deskew range (channel deskew)	between analog channels	±20 ms
	between digital channels	±100 ns
Reference position		0 % to 100 % of measurement display area
Horizontal position range (trigger offset range)	max. min.	+(memory depth/current sampling rate) -5000 s
Modes		normal
Channel-to-channel skew	between analog channels	< 100 ps (meas.)
	between digital channels	< 500 ps (meas.)
Timebase accuracy	after delivery/calibration, at +23 °C	±0.2 ppm
	during calibration interval	±1 ppm
Delta time accuracy	corresponds to time error between two edges on same acquisition and channel; signal amplitude greater than five divisions, measurement threshold set to 50 %, vertical gain 10 mV/div or greater; rise time lower than four sample periods; waveform acquired in real-time mode	±(0.20/real-time sampling rate + timebase accuracy ×  reading ) (peak) (meas.)

## Acquisition system

Sampling rate	analog channels (real time)	max. 5 Gsample/s on 4 channels, max. 2.5 Gsample/s on 8 channels
	analog channels (interpolated)	max. 5 Tsample/s
	digital channels	max. 5 Gsample/s on each channel
Waveform acquisition rate	max.	> 4 500 000 waveforms/s
Trigger rearm time	min.	< 21 ns
Memory depth <sup>4</sup>	standard	
	analog channels only	with 8 active channels: • max. 500 Mpoints (single capture) • max. 250 Mpoints (run continuous) with 4 active channels: • max. 500 Mpoints (single capture and run continuous)
	digital channels only (MSO)	with 16 digital channels: • max. 500 Mpoints (single capture) with 8 digital channels: • max. 500 Mpoints (run continuous)
	mix analog and digital	with 2 analog and 8 digital channels: • max. 500 Mpoints (single capture) • max. 250 Mpoints (run continuous)
	with R&S®MXO5-B110 memory option 1 Gpoint	
	analog channels only	with 4 active channels: • max. 1 Gpoint (single capture) with 2 active channels: • max. 1 Gpoint (run continuous)
	digital channels only (MSO)	with 16 digital channels: • max. 500 Mpoints (single capture) • max. 250 Mpoints (run continuous) with 8 digital channels: • max. 1 Gpoint (single capture) • max. 500 Mpoints (run continuous)
	mix analog and digital	with 2 analog and 8 digital channels: • max. 500 Mpoints (single capture) • max. 250 Mpoints (run continuous)

<sup>4</sup> The maximum available memory depth depends on the bit resolution of the acquired data and, therefore, on the acquisition system settings such as decimation mode, use of waveform arithmetics or high definition (HD) mode. Interleave channels of the MXO 58 are on C1 and C5, C2 and C6, C3 and C7 as well as C4 and C8. For the MXO 54, all 4 channels run with 5 Gsample/s and maximum bandwidth.

Acquisition modes	sample	middle sample in decimation interval
	peak detect	largest and smallest sample in decimation interval
	average	average value of samples in decimation interval
	number of averaged waveforms	2 to 16 777 215
	envelope	envelope of acquired waveforms
Sampling modes	real-time mode	max. sampling rate set by digitizer
	interpolated time	enhancement of sampling resolution by interpolation; max. sampling rate is 5 Tsample/s
Interpolation modes		linear, sin(x)/x, sample & hold
Fast segmentation mode	continuous recording of waveforms in acquisition memory without interruption due to visualization	
	max. real-time waveform acquisition rate	> 4 600 000 waveforms/s
	min. blind time between consecutive acquisitions	< 21 ns

## High definition mode

General description	The high definition mode increases the bit resolution of the waveform signal by using digital filtering, leading to reduced noise. Because of the digital trigger concept of the MXO 5, signals with increased numeric resolution are used as the input for triggering.	
Numeric resolution	bandwidth, at 5 Gsample/s	bit resolution
	1 kHz to 10 MHz	18 bit
	100 MHz	16 bit
	200 MHz	15 bit
	500 MHz	14 bit
Real-time sampling rate	all models	max. 2.5 Gsample/s on 4 channels, max. 1.25 Gsample/s on 8 channels

## Trigger system

Trigger sources	analog channels (C1 to C8), digital channels (D0 to D15), external trigger input, line trigger, serial bus	
Trigger level range	±5 div from center of screen	
Trigger modes	auto, normal, single, n single	
Trigger sensitivity	0.0001 div, from DC to instrument bandwidth for all vertical scales, user adjustable	
Trigger jitter	full-scale sine wave of frequency set to –3 dB bandwidth	< 1 ps (RMS) (meas.)
Coupling mode	standard	same as selected channel
	HF reject	cutoff frequency selectable from 1 kHz to 500 MHz
	LF reject	attenuates frequencies < 50 kHz
Trigger hysteresis	modes	auto (default setting) or manual
	adjustment resolution	0.0001 div, from DC to instrument bandwidth for all vertical scales
Holdoff range	time	100 ns to 10 s, fixed and random

Main trigger modes		
Edge	triggers on specified edge (positive, negative or either) and level	
Glitch	triggers on glitches of positive, negative or either polarity that are shorter or longer than specified width	
	glitch width	200 ps to 1000 s
Width	triggers on positive or negative pulse of specified width; width can be shorter, longer, inside or outside a specified range	
	pulse width	200 ps to 1000 s
Runt	triggers on pulse of positive, negative or either polarity that crosses one threshold but fails to cross a second threshold before crossing the first one again; runt pulse width can be arbitrary, shorter, longer, inside or outside a specified range	
	runt pulse width	200 ps to 1000 s

Window	triggers when signal enters or exits a specified voltage range; triggers also when signal stays inside or outside the voltage range for a specified period of time	
Timeout	triggers when signal stays high, low or unchanged for a specified period of time	timeout 0 ps to 1000 s
Interval	triggers when time between two consecutive edges of same slope (positive or negative) is shorter, longer, inside or outside a specified range	interval time 200 ps to 1000 s
Slew rate	triggers when the time required by a signal edge to toggle between user-defined upper and lower voltage levels is shorter, longer, inside or outside a specified range; edge slope may be positive, negative or either	toggle time 0 ps to 1000 s
Setup & hold	triggers on setup time and hold time violations between clock and data present on any two input channels; monitored time interval may be specified by the user in the range from -100 s to 100 s around a clock edge and must be at least 200 ps wide	
Pattern	triggers when a logical combination (and, nand, or, nor) of the input channels stays true for a period of time shorter, longer, inside or outside a specified range	
State	triggers when a logical combination (and, nand, or, nor) of the input channels stays true at a slope (positive, negative or either) in one selected channel	

Advanced trigger modes		
Zone trigger	triggers on user-defined zones drawn on the display	
	source	acquired waveforms (input channels), math waveforms (including power analysis waveforms), spectrum waveforms, XY plots
	number of zones/areas	up to 4 zones with up to 8 areas each
	area shapes	polygons with up to 16 points
	area types	must intersect, must not intersect
	combination of zones	logical combination of zones of multiple sources using Boolean expressions
	trigger compatibility	requires sequence trigger A -> zone trigger where primary A condition can be: edge, glitch, width, runt, window, timeout, interval, slew rate, setup & hold, state, pattern
Sequence trigger (A/B/R trigger)	triggers on B event after occurrence of A event; delay condition after A event specified as time interval; an optional R event resets the trigger sequence to A	
	trigger sources	analog channels (C1 to C8)
	A event	edge, glitch, width, runt, window, timeout, interval, slew rate
	B event	edge, glitch, width, runt, window, timeout, interval, slew rate
	R event	edge, glitch, width, runt, window, timeout, interval, slew rate
Serial bus trigger	optional	see dedicated triggering and decoding options
Trigger input	input impedance	50 Ω (meas.) or 1 MΩ (meas.)    11 pF (meas.)
	max. input voltage at 50 Ω	30 V (V <sub>p</sub> )
	max. input voltage at 1 MΩ	300 V (RMS), 400 V (V <sub>p</sub> ), derates at 20 dB/decade to 5 V (RMS) above 250 kHz
	trigger level	±5 V
	sensitivity	
	input frequency ≤ 500 MHz	300 mV (V <sub>pp</sub> ) (meas.)
	input coupling	AC, DC (50 Ω and 1 MΩ)
	trigger filter	HF reject (attenuates > 50 kHz), LF reject (attenuates < 50 kHz), noise reject
	trigger modes	edge (positive, negative or either)

Trigger output	functionality	A pulse is generated for each event triggering signal acquisition.
	output voltage	0 V to 5 V (nom.) at high impedance; 0 V to 2.5 V (nom.) at 50 $\Omega$
	pulse width	selectable between 16 ns and 50 ms
	pulse polarity	low active or high active
	output delay	depends on trigger settings

## Spectrum analysis

General description	Spectrum analysis allows up to four signal analysis in the frequency domain.	
Spectrum	sources	channel 1 to channel 8
	setup parameters	center frequency, frequency span, resolution bandwidth (automatic or manual), gate position, gate width, vertical scaling, vertical position
	scaling	dBm, dBV, dB $\mu$ V, V (RMS)
	span	1 Hz to 1.8 GHz <sup>5</sup>
	resolution bandwidth (RBW)	(span/4) $\geq$ RBW $\geq$ (span/6000)
	windows	flat top, Hanning, Hamming, Blackman, rectangular, Kaiser Bessel, Gaussian
	trace types	normal, max. hold, min. hold, average
	max. real-time waveform acquisition rate	> 40 000 waveforms/s
Gate	delimits the display region used for spectrum analysis	
Peak list	The values in the peak list are also shown in the diagram to allow easy correlation.	

## RF characteristics

Sensitivity/noise density	at 1 GHz (measurement of the power spectral density at 1 GHz at input sensitivity 2 mV/div, corresponding to -30 dBm input range of the oscilloscope, using spectrum analysis with center frequency 1 GHz, span 500 kHz, RBW 3 kHz)	-160 dBm (1 Hz) (meas.)
Noise figure	at 1 GHz (calculated based on the noise power density above)	14 dB (meas.)
Dynamic range	measured for a 1 GHz input carrier with level -3 dBm at input of oscilloscope, using spectrum analysis with center frequency 1 GHz, span 2 MHz, RBW 400 Hz at +20 MHz from center frequency	106 dB (meas.)
Absolute amplitude accuracy	0 Hz to 1.2 GHz	$\pm$ 1 dB (meas.)
Spurious-free dynamic range (excluding harmonics)	measured for a 250 MHz input carrier with level -3 dBm at input sensitivity 50 mV/div, using spectrum analysis with center frequency 900 MHz, span 1.8 GHz, RBW 300 kHz	67 dBc (meas.)
Second harmonic distortion	measured for a 250 MHz input carrier with level -3 dBm at input sensitivity 50 mV/div, using spectrum analysis with center frequency 900 MHz, span 1.8 GHz, RBW 300 kHz	-65 dBc (meas.)
Third harmonic distortion	measured for a 250 MHz input carrier with level -3 dBm at input sensitivity 50 mV/div, using spectrum analysis with center frequency 900 MHz, span 1.8 GHz, RBW 300 kHz	-49 dBc (meas.)

<sup>5</sup> The stop frequency depends on the analog bandwidth of the instrument.

## Waveform measurements

Automatic measurements	measurements on acquired waveforms (input channels), math waveforms, reference waveforms	amplitude, high, low, maximum, minimum, peak-to-peak, mean, RMS, sigma, positive overshoot, negative overshoot, area, rise time, fall time, positive pulse width, negative pulse width, period, frequency, positive duty cycle, negative duty cycle, delay, phase, burst width, pulse count, edge count, pulse train, positive switching, negative switching, cycle area, cycle mean, cycle RMS, cycle sigma, setup, hold, setup/hold time, setup/hold ratio, slew rate rising, slew rate falling, delay to trigger
	gate	delimits the display region evaluated for automatic measurements
	reference levels	user-configurable vertical levels define support structures for automatic measurements
	statistics	displays maximum, minimum, mean, standard deviation and measurement count for each automatic measurement
	number of active measurements	24
	result line annotation	
Cursor measurements	available cursors	up to four cursor sets on screen, each set with two horizontal and two vertical cursors
	target waveforms	acquired waveforms (input channels), math waveforms, reference waveforms, XY diagrams
	operating modes	vertical measurements, horizontal measurements, or both; vertical cursors either set manually or locked to waveform
	source mode	single source, use second source, multiple sources (multi-channel cursor)
	multiple sources mode selection	acquired waveforms (input channels), math waveforms, reference waveforms
Waveform histogram	number of diagrams	up to 8
	sources	acquired waveforms (input channels), math waveforms, reference waveforms
	mode	vertical, horizontal
	windowing	user-defined

## Waveform math

General features	number of math equations	up to 8
	number of reference waveforms	up to 8
	sources	channel 1 to 8, math waveforms 1 to 8, reference waveforms 1 to 8
Functions	operators	add, subtract, multiply, divide, absolute value, square, square root, integrate, differentiate, $\log_{10}$ , $\log_e$ , $\log_2$ , reciprocal, invert, lowpass, highpass, rescale ( $a \cdot x + b$ )
	filters	lowpass, highpass
	filter types	Gaussian, rectangular
	gate	delimits the display region used for waveform math

## Digital voltmeter

Accuracy		related to channel settings of voltmeter source
Measurements		DC, DC RMS, AC RMS
Sources	MXO 54	C1, C2, C3, C4
	MXO 58	C1, C2, C3, C4, C5, C6, C7, C8
Number of measurements		up to 4
Resolution		up to 6 digits
Bandwidth		up to 20 MHz

## Display characteristics

Diagram types	Yt, XY, zoom, spectrum
Display configuration (waveform layout)	The display area can be split into separate diagram areas by dragging and dropping signal icons. Each diagram can hold any number of signals. Diagrams can be stacked on top of each other and later accessed via dynamic tabs (Tab 1, etc.)
Signal icons	Each active waveform is represented by a signal icon on the signal bar; the signal icon displays the individual vertical and acquisition settings.
Toolbar	Enables quick access to important tools; allows to set the most common parameters directly in a simple menu and gives access to more detailed parameters in the main menu. User-defined selection of tools in the toolbar.
Upper menu bar	Displays trigger, horizontal and acquisition system settings; allows quick access to these settings.
Main menu	Provides access to all instrument settings in a compact menu structure.
Axis label	The x-axis and y-axis are labeled with values and physical unit.
Diagram label	Diagrams can be individually labeled with a descriptive, user-defined name.
Diagram layout	The grid, crosshair, axis labeling and diagram labeling can be switched on and off separately.
Persistence	50 ms to 50 s, or infinite
Zoom	vertical and horizontal; touch interface simplifies resize and drag operations on zoom window
Signal colors (waveform coding)	predefined or user-defined color tables for persistence display

## History and segmented memory

Acquisition memory	automatic	automatic setting of segment size and sample rate
	manual	user-defined setting of segment size and sample rate
Memory segmentation	function	memory segments for the acquisition
	number of segments	record length
		segments <sup>6</sup> (up to)
	1 kpoint	1 048 575
	2 kpoints	524 287
	5 kpoints	262 143
	10 kpoints	131 071
	20 kpoints	65 535
	50 kpoints	32 767
	100 kpoints	16 383
	200 kpoints	9 361
	500 kpoints	4 095
	1 Mpoint	2 113
	2 Mpoints	1 056
	5 Mpoints	427
	10 Mpoints	213
	20 Mpoints	106
	50 Mpoints	41
	100 Mpoints	20
	200 Mpoints	9
	500 Mpoints	3
	1 Gpoint	1
	Segmentation is available on all analog and logic channels, protocol decoding and spectrum analysis.	

<sup>6</sup> With R&S®MXO5-B110 memory option. The maximum number of segments depends on the number of active channels and the bit resolution of the acquired data and, therefore, on the acquisition system settings such as decimation mode, use of waveform arithmetics or high definition (HD) mode. The maximum number of segments without the R&S®MXO5-B110 memory option is limited to 10 000.

Fast-segmented mode	continuous recording of waveforms in acquisition memory without interruption due to visualization; blind time between consecutive acquisitions, see Acquisition system	
History mode	function	The history mode is an always-on function and provides access to past acquisitions in the segmented memory.
	timestamp resolution	1 ns
	history player	replays the recorded waveforms; repetition possible; adjustable speed; manual next/previous segment; numerical segment number input
	analyze options	overlay all segments, average all segments, envelope all segments

## Mask testing

Test definition	number of masks	up to 8 simultaneously
	source	acquired waveforms (input channels), math waveforms, reference waveforms, spectrum waveforms, XY plots
	fail condition	waveform hit
	test rate	up to 4 million waveforms/s
	action on error	acquisition stop, beep, save waveform, screenshot, pulse on trigger out
Mask definition with segments	number of segments per mask test	up to 8
	segment definition	array of at least 3 points defines an inner region
Result statistics	category	total completed acquisition, failed acquisition, passed acquisition, fail rate, overall test result (pass/fail)
Visualization options	waveform style	vectors, dots
	mask colors	predefined colors for mask without violation (translucent gray), mask with violation (translucent red)

## R&S®ScopeSync

Supported instruments	MXO 44, MXO 54, MXO 58, MXO 54C, MXO 58C	any combination of these instruments is supported, both as oscilloscope 1 and oscilloscope 2
Maximum number of channels	oscilloscope 1: MXO 44 or MXO 54 or MXO 54C oscilloscope 2: MXO 44 or MXO 54 or MXO 54C	8 with R&S®ScopeSync 16 with R&S®ScopeSync + additional GetSignals
	oscilloscope 1: MXO 44 or MXO 54 or MXO 54C oscilloscope 2: MXO 58 or MXO 58C	12 with R&S®ScopeSync 20 with R&S®ScopeSync + additional GetSignals
	oscilloscope 1: MXO 58 or MXO 58C oscilloscope 2: MXO 58 or MXO 58C	16 with R&S®ScopeSync 24 with R&S®ScopeSync + additional GetSignals
Trigger out to trigger in jitter	across two instruments, oscilloscope 1/oscilloscope 2	250 ps (RMS) (meas.)

## Miscellaneous

Remote control	web interface	full operation of the instrument's touch interface, keys and multifunction wheel via web browser
	VNC	control of the instrument through virtual network computing
	SCPI	standard instrument programming interface through VISA
	WebDAV	support for the web distributed authoring and versioning (WebDAV) protocol, which provides secure access through an application proxy

Languages	available languages for the user interface	English, German, French, Simplified Chinese, Traditional Chinese, Japanese, Russian, Spanish, Italian, Portuguese, Korean, Czech, Polish
	online help on the instrument	English
Save	destination	internal storage, USB media and remote network drive
	data and file management	settings: saveset, generator, screenshot
		waveform data and results: waveform, session, results, histogram
	waveform file format	Rohde & Schwarz waveform data binary (.bin) comma separated values (.csv), hierarchical data format (.h5) multi-waveforms compressed format (.zip/.csv)
	export mode control	display, all data, cursor, gate, manual
Recall	sessions	compressed format (.zip) that can include setting on display/diagram, channel waveforms and reference waveforms
	data and file management	settings: saveset and generator waveform data: reference and session

## Input and output

Front		
Channel inputs		BNC; for details, see Vertical system
	probe interface	auto detection of passive probes, Rohde & Schwarz active probe interface
Digital channel inputs	D15 to D8, D7 to D0	interface for R&S®RT-ZL04 logic probe
Probe compensation output	signal shape	rectangle, $V_{\text{low}} = 0 \text{ V}$ , $V_{\text{high}} = 3.3 \text{ V}$ amplitude 3.3 V ( $V_{\text{pp}}$ ) $\pm 5\%$ (meas.)
	frequency	1 kHz $\pm 1\%$ (meas.)
USB interfaces		3 x USB 3.1 Gen 1 ports, type A plug
Demo P1, P2	analog signal output for demo apps	$V_p \leq \pm 5 \text{ V}$ (meas.)

Rear		
Trigger output		BNC; for details, see Trigger system
External trigger input		BNC; for details, see Trigger system
Waveform generator outputs (requires R&S®MXO5-B6 option)		BNC; for details, see R&S®MXO5-B6 option, waveform generator, demo lugs and GND lug
USB interface		1 x USB 3.1 Gen 1 port, type B plug
Reference input	connector	BNC
	impedance	50 Ω (nom.)
	input frequency	10 MHz ( $\pm 20$ ppm)
	sensitivity	$\geq -10 \text{ dBm}$ into 50 Ω, $\leq 10 \text{ dBm}$ at 10 MHz
Reference output	connector	BNC
	impedance	50 Ω (nom.)
	output signal	10 MHz (specified with timebase accuracy), 8 dBm (nom.)
Security slot		for standard Kensington style lock
VESA mount	via R&S®MXO5-Z7 VESA adapter	VESA compatibility mounting interface, 100 mm x 100 mm pattern size, according FDMI MIS-D, up to 14 kg with M4x10 screws

Right side		
Ground jack		connected to ground
USB interfaces		2 x USB 3.1 Gen 1 ports, type A plug
LAN interface		RJ-45 connector, supports 10/100/1000BASE-T, LXI compliant
External monitor interface		HDMI 2.0 and DisplayPort++ 1.3, output of oscilloscope display

## General data

Display	type	15.6" LC TFT color display with capacitive touchscreen
	resolution	1920 × 1080 pixel (Full HD)

Temperature		
Temperature range	operating temperature range	0 °C to +50 °C
	storage temperature range	-40 °C to +70 °C
		in line with MIL-PRF-28800F section 4.5.5.1.1 class 3 tailored to +45 °C for operation
Climatic resistance	damp heat	+25 °C/+50 °C at 85 % relative humidity cyclic, in line with IEC 60068-2-30

Altitude		
Operating		up to 3000 m above sea level
Nonoperating		up to 4600 m above sea level

Mechanical resistance		
Vibration	sinusoidal	5 Hz to 150 Hz, max. 1.8 g at 55 Hz; 0.5 g from 55 Hz to 150 Hz, in line with EN 60068-2-6
		10 Hz to 55 Hz, in line with MIL-PRF-28800F, section 4.5.5.3.2, class 3
	random	8 Hz to 500 Hz, acceleration 1.2 g (RMS), in line with EN 60068-2-64
		5 Hz to 500 Hz, acceleration 2.058 g (RMS), in line with MIL-PRF-28800F, section 4.5.5.3.1, class 3
Shock		40 g shock spectrum, in line with MIL-STD-810G, method no. 516.6, procedure I
		30 g functional shock, half sine, duration 11 ms, in line with MIL-PRF-28800F, section 4.5.5.4.1

Electromagnetic compatibility (EMC)		
RF emissions		in line with CISPR 11/EN 55011 group 1, class A (for a shielded test setup); the instrument complies with the emission requirements stipulated by EN 55011, EN 61326-1 and EN 61326-2-1 class A, making the instrument suitable for use in industrial environments
Immunity		in line with IEC/EN 61326-1 table 2, immunity test requirements for industrial environment <sup>7</sup>

Certifications	VDE, cCSA <sub>US</sub> , KC	
EU legislation	EU: in line with Data Act – Regulation (EU) 2023/2854	for details, see user documentation

Calibration interval	1 year
----------------------	--------

<sup>7</sup> Test criterion is displayed noise level within ±1 div for an input sensitivity of 5 mV/div.

<b>Power supply</b>		
AC supply		100 V to 240 V $\pm$ 10 % at 50 Hz to 60 Hz and 400 Hz $\pm$ 5 %, max. 4 A to 2.5 A, in line with MIL-PRF 28800F, section 3.5
Power consumption	standby mode	1.6 W
	all channels on, without probes	180 W (typ.)
	max.	360 W
Safety		in line with IEC 61010-1, IEC 61010-2-030, CAN/CSA-C22.2 no. 61010-1, UL 61010-1, CAN/CSA C22.2 no. 61010-2-030

<b>Mechanical data</b>		
Dimensions	W $\times$ H $\times$ D	445 mm $\times$ 314 mm $\times$ 153 mm (17.51 in $\times$ 12.36 in $\times$ 6.02 in)
Weight	without options, nominal	9.0 kg (19.85 lb)
Rackmount height	with R&S®ZZA-MX05 rackmount kit	8 HU

# Options

## R&S®MXO5-B1 mixed signal option

Mixed signal capability is a standard functionality of the MXO 5 series oscilloscopes. The R&S®MXO5-B1 mixed signal option provides 16 digital channels with two R&S®RT-ZL04 probes.

## R&S®MXO5-B6 arbitrary waveform generator

Arbitrary function/waveform generator, 2 analog channels

General		
Output channel		2 channels
Vertical resolution		16 bit
Operating modes		function generator, arbitrary waveform generator, modulation, frequency sweep

Function generator	output of predefined waveforms	
Sample rate		625 Msample/s
Waveforms	sine, square/pulse, ramp, DC, noise, sine cardinal (sinc), Gaussian pulse, Lorentz, exponential fall, exponential rise, cardiac	
Sine	<p>frequency range</p> <p>amplitude flatness (relative to 1 kHz)</p> <p>total harmonic distortion (into 50 <math>\Omega</math>)</p> <p><math>f \leq 10</math> MHz</p> <p><math>f &gt; 10</math> MHz</p> <p>nonharmonic spurious</p>	<p>1 mHz to 100 MHz</p> <p><math>\leq \pm 0.5</math> dB (meas.)</p> <p></p> <p><math>\leq -60</math> dBc (meas.)</p> <p><math>\leq -40</math> dBc (meas.)</p> <p><math>-75</math> dBc (meas.)</p>
Square/pulse	<p>frequency range</p> <p>duty cycle (if pulse width limit is not exceeded)</p> <p>pulse width</p> <p>rise/fall time</p> <p>overshoot</p> <p>jitter (cycle-to-cycle) (<math>\geq 0.2</math> V (<math>V_{pp}</math>))</p>	<p>1 mHz to 30 MHz</p> <p>0.01 % to 99.99 %, 0.01 % resolution</p> <p><math>\geq 16.5</math> ns, 0.1 ns resolution</p> <p>9 ns (meas.)</p> <p><math>\leq 2</math> % (meas.)</p> <p><math>\leq 40</math> ps (RMS) (meas.)</p>
Ramp (triangle, sawtooth)	<p>frequency range</p> <p>variable symmetry</p>	<p>1 mHz to 1 MHz</p> <p>0 % to 100 %, 0.1 % resolution</p>
DC	<p>level range</p> <p>into 50 <math>\Omega</math></p> <p>into open circuit</p> <p>resolution</p>	<p></p> <p><math>\pm 2.5</math> V</p> <p><math>\pm 5</math> V</p> <p>1 mV</p>
Noise	<p>amplitude</p> <p>DC</p> <p>all other waveforms</p> <p>bandwidth</p>	<p>0 V to 5 V (<math>V_{pp}</math>) (into 50 <math>\Omega</math>), 0 V to 10 V (<math>V_{pp}</math>) (into open circuit), 1 mV resolution</p> <p>0 % to 100 % of AC signal amplitude, 1 % resolution</p> <p><math>\geq 100</math> MHz</p>
Sine cardinal (sinc)	frequency range	1 mHz to 5 MHz
Gaussian pulse	frequency range	1 mHz to 25 MHz
Lorentz	frequency range	1 mHz to 10 MHz
Exponential rise/fall	frequency range	1 mHz to 10 MHz
Cardiac	frequency range	1 mHz to 1 MHz

Arbitrary waveform generator	output of user-defined waveforms	
Waveform length		1 sample to 40 Msample on each channel
Sample rate		1 sample/s to 312.5 Msample/s
Filter bandwidth		100 MHz

<b>Modulation</b>		
Modulation types		amplitude modulation (AM), frequency modulation (FM), frequency-shift key modulation (FSK), pulse width modulation (PWM)
Carrier waveform	AM, FM, FSK	sine
AM	PWM	square/pulse
	modulation signals	sine, square, ramp (triangle, sawtooth)
	modulation frequency	1 mHz to 1 MHz
FM	depth	0 % to 100 %, 0.1 % resolution
	modulation signals	sine, square, triangle, ramp, inverse ramp
	modulation frequency	1 mHz to 1 MHz
FSK	frequency deviation	1 mHz to 10 MHz
	modulation signal	50 % duty cycle square wave
	range of frequency 1, frequency 2	1 mHz to 100 MHz
PWM	hop rate	1 mHz to 1 MHz
	modulation signals	sine, square, ramp
	depth	0 % to 99.99 % of the duty cycle, 0.01 % resolution

<b>Frequency sweep</b>	output of a sinusoidal waveform with the frequency changing linearly between the start frequency and the stop frequency within the sweep time
	waveform
	frequency range
	direction
	sweep time

<b>Two-channel operation</b>	operating modes	independent channels, coupled parameters, differential
	parameter coupling	none, frequency and/or amplitude
	relative phase	-180° to 180°, 0.1° resolution
	channel-to-channel skew (each channel with same output amplitude)	≤ 200 ps (meas.)
	channel-to-channel isolation (each channel with same output amplitude)	≥ 70 dB (meas.)
<b>Outputs</b>		
Connectors		BNC; on the front of the instrument
Function		on/off, inverted
Output impedance		50 Ω (nom.)
Overload protection	$V_{pp} > 200$ mV into open circuit	a short-circuit to ground is tolerated indefinitely, automatic shutoff in case of voltages $\geq +12$ V or $\leq -12$ V (meas.)
	$V_{pp} \leq 200$ mV into open circuit	a short-circuit to ground is tolerated indefinitely, automatic shutoff in case of voltages $\geq +4$ V or $\leq -4$ V (meas.)
Amplitude range <sup>8</sup>	sine, square/pulse, ramp, exponential rise/fall, arbitrary waveforms, sine cardinal (sinc), Gaussian, Lorentz, cardiac	
	into 50 Ω	5 mV to 5 V ( $V_{pp}$ )
	into open circuit	10 mV to 10 V ( $V_{pp}$ )
	resolution	1 mV
	accuracy	±1 % at 1 kHz

<sup>8</sup> Amplitude is the sum of the AC amplitude and the noise amplitude.

DC offset range	sine, square/pulse, ramp, exponential rise/fall, arbitrary waveforms	
	into 50 Ω	±2.5 V ( $V_{pp} > 100$ mV), ±1.25 V ( $V_{pp} \leq 100$ mV)
	into open circuit	±5.0 V ( $V_{pp} > 200$ mV), ±2.5 V ( $V_{pp} \leq 200$ mV)
	sine cardinal (sinc): DC offset range is signal amplitude dependent	
	into 50 Ω	-2.823 V to +2.177 V ( $V_{pp} = 1$ V)
	into open circuit	-5.323 V to +4.677 V ( $V_{pp} = 1$ V)
	Gaussian, Lorentz: DC offset range is signal amplitude dependent	
	into 50 Ω	-3.000 V to +2.000 V ( $V_{pp} = 1$ V)
	into open circuit	-5.500 V to +4.500 V ( $V_{pp} = 1$ V)
	cardiac: DC offset range is signal amplitude dependent	
	into 50 Ω	-2.814 V to +2.186 V ( $V_{pp} = 1$ V)
	into open circuit	-5.314 V to +4.686 V ( $V_{pp} = 1$ V)
	resolution	1 mV
	accuracy	±(1 % of control + (0.5 % of amplitude) + 2 mV)
Frequency accuracy		$ \Delta f  \leq [(\text{timebase accuracy}) \times (\text{nominal frequency}) + 1.1 \mu\text{Hz}] (\text{calc.})$ (timebase accuracy, see Horizontal system)

## R&S®MXO5-K12 basic jitter analysis

General description	The R&S®MXO5-K12 basic jitter analysis option extends the functionality of the standard MXO 5 firmware with a suite of measurement, analysis and visualization tools for signal integrity analysis and jitter characterization.	
Waveform measurements	category	jitter
	measurements on acquired waveforms (input channels), math waveforms, reference waveforms	cycle-to-cycle jitter, N-cycle jitter, cycle-to-cycle width, cycle-to-cycle duty cycle, time-interval error, data rate, unit interval, skew delay, skew phase
	gate	delimits the display region evaluated for measurements
	reference levels	user-configurable vertical levels define support structures for measurements
	statistics	displays maximum, minimum, mean, standard deviation and measurement count for each measurement
	track	measurement results displayed as continuous trace that is time-correlated to the measurement source

## R&S®MXO5-K31 power analysis

Power analysis		
General description	<p>The R&amp;S®MXO5-K31 power analysis option extends the MXO 5 firmware with measurement functionality focused on switched mode power supplies (SMPS) and DC/DC converters.</p> <p>Up to six sets of power analysis measurements are possible.</p>	
Input	quality	evaluation of power quality at an AC input; measures real power, apparent power, reactive power, power factor and phase angle of power, frequency, crest factor, RMS of voltage and current
	harmonics	measures up to the 334th harmonic of the incoming line frequency; precompliance checking for IEC 61000-3-2 (A, B, C, D), RTCA DO-160, MIL-STD-1399, max. limit checks
Power path	switching loss	measures switching loss and conduction loss of a power device
	turn on/off time	measures relationship between input AC/DC and output DC voltage, when turning SMPS off and on
	efficiency	measures input power and output power to calculate the efficiency of a power device
	safe operating area (SOA)	checks violation of voltage and current limits in which a power device can operate without damage; current versus voltage view; violation mask is user-defined; up to 4 masks; save/load of masks; export of mask violation data
Deskew	automated	automated compensation of the propagation delay
Zero offset	automated	automatic compensation of input offset

## R&S®MXO5-K36 frequency response analysis

Frequency response analysis (requires R&S®MXO5-B6 option)		
Stimulus	frequency mode	single sweep, repeated sweep and single frequency
	frequency range	10 mHz to 100 MHz
	amplitude mode	fixed or amplitude profile
	amplitude level	10 mV to 10 V into high Z 5 mV to 5 V into 50 Ω
Input and output sources	channel 1, channel 2, channel 3, channel 4	
Number of test points	10 points to 500 points per decade	
Measurement	dual pair of tracking gain and phase cursors	
Diagram types	manually changeable vertical window size	
Result table	parallel display of result window and input and output signal view	
Scaling	navigation and export functions	
Scaling	auto scale and manual scaling and positioning	
References	number of reference waveforms	
	up to 4	

## R&S®MXO5-K136 eye analysis

General description	The eye analysis allows the user to generate eye diagrams from long multi-period acquisitions of clock signals, and software-supported clock data recovery signals. It allows fine control of the signal content that contributes to the eye diagram and enables advanced analysis and navigation functions.	
General configuration	number of eye diagram instances	up to 8; independently configurable
	main source	analog channels, math channels, reference channels
	timing reference source	analog channels, math channels, reference channels
	horizontal settings	range, position; expressed in absolute time or relative to user-defined bit rate
	vertical settings	scale, offset, and position
Display	persistence	50 ms to 50 s, or infinite
	trace colors	predefined or user-defined color tables for persistence display
Qualification	gate	
	selection	delimits the display region evaluated for eye analysis
Waveform measurements	category	eye
	measurements on eye diagrams	extinction ratio, eye height, eye width, eye top, eye base, crossing points, Q factor, Noise (RMS), S/N ratio, duty cycle distortion, eye rise time, eye fall time, eye bit rate, eye amplitude, jitter (peak-to-peak, 6-sigma, RMS)
	reference levels	user-configurable vertical levels for eye rise time and eye fall time measurements
	statistics	displays maximum, minimum, mean, standard deviation and measurement count for each measurement

## R&S®MXO5-K500 bus analysis

Protocol measurements (require corresponding R&S®MXO5-K510 to R&S®MXO5-K560 protocol options)		
Frame to frame	measures the distance between the starts of two selectable frame types in seconds	<ul style="list-style-type: none"> <li>from: frame type, field type, field value</li> <li>to: frame type, field type field value</li> </ul>
Trigger to frame	measures the distance between the trigger event and the start of a selectable frame type in seconds	frame identification; frame type, field type, field value
Frame to trigger	measures the distance between the start of a selectable frame type and the trigger event	frame identification; frame type, field type, field value
Field value	allows for the selection of frame types and displays the value of a specified field	frame identification; frame type, field type, field value tracked; field type
Main bit rate	measures the main bit rate of a protocol based on the relevant bits in a frame; if a protocol provides multiple bit rates, the most relevant bit rate is being measured	frame identification; frame type, field type, field value
Second bit rate	for protocols with multiple bit rates, the secondary bit rate is available	only available for protocols with 2 bit rates frame identification; frame type, field type, field value
Bus idle	measures the percentage of idle time on a bus; idle time is defined as the time where the bus is not occupied by frames	no settings
Gap	measures the distance between the end of a frame to the start of another	no settings
Frame count	counts the total number of frames in each acquisition	no settings
Frame errors	counts the total number of erroneous frames in each acquisition	no settings
Frame error rate	measures the percentage of erroneous frames in relation to the total frames	no settings
Consecutive frame error rate	measures the percentage of follow up (consecutive) frame errors, ignoring all single frame errors	no settings

## R&S®MXO5-K510 low speed serial buses

I <sup>2</sup> C triggering and decoding		
Protocol configuration	bit rate	auto detected
Trigger (hardware based)	source (clock and data)	any analog input channel or logical channel
	trigger event setup	start, stop, restart, missing ACK, address, data, address + data
	address setup	7 bit or 10 bit address (value in hex or binary); read, write or either; condition =, ≠, ≥, ≤, in range, out of range
	data setup	data pattern up to 8 byte (hex or binary); condition =, ≠; offset within frame in range from 0 byte to 4095 byte
Trigger (software based)	primary event trigger (hardware based)	edge, glitch, width, runt, windows, timeout, interval, slew rate
	frame type	write, read, 10 bit write, 10 bit read
	write	address; conditions =, ≠, <, ≤, >, ≥, in range, out of range; ACK-A; value 0, 1 data word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; data index: selects the specific data word; conditions =, in range; ACK-D word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; ACK-D index: selects the specific data word; conditions =, in range
	read	address; conditions =, ≠, <, ≤, >, ≥, in range, out of range; ACK-A; value 0, 1 data word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; data index: selects the specific data word; conditions =, in range; ACK-D word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; ACK-D index: selects the specific data word; conditions =, in range
	10 bit write	address; conditions =, ≠, <, ≤, >, ≥, in range, out of range; ACK-A, ACK-A2; value 0, 1 for each of these options; data word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; data index: selects the specific data word; conditions =, in range; ACK-D word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; ACK-D index: selects the specific data word; conditions =, in range

	10 bit read	address; conditions =, ≠, <, ≤, >, ≥, in range, out of range; ACK-A; value 0, 1 data word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; data index: selects the specific data word; conditions =, in range; ACK-D word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; ACK-D index: selects the specific data word; conditions =, in range
	error condition	no stop bit, 10 bit read address different, unknown
Decode	source (clock and data)	any analog or logical input channel; math or reference waveform
	display type	decoded bus, tabulated list
	color coding	frame, start/restart, address (read/write), data, ACK/NACK, stop, error
	data format	hex, decimal, octal, binary, ASCII
	result export	export of all result data into CSV, XML, HTML and Py file formats
Filter	The filter function selects those decode events that shall be shown in the result table. Events that do not match the criteria set will not be displayed in the table when the filter is turned on.	
	settings	same as trigger settings

SPI triggering and decoding		
Protocol configuration	type	2-wire, 3-wire and 4-wire SPI
	bit rate	auto detected
	bit order	LSB first, MSB first
	word size	4/8/12/16/20/24/28/32 bit
	frame condition	CS, timeout
	polarity (MOSI, MISO, CS, CLK)	active high, active low
	phase (CLK)	first edge, second edge
Trigger (hardware based)	source (MOSI, MISO, CS, CLK)	any analog input channel or logical channel
	bit rate	up to 50 Mbps
	trigger event setup	start of frame, end of frame, MOSI, MISO
	data setup	data pattern up to 32 bit (hex or binary); condition =, ≠; offset within frame in range from 0 bit to 4095 bit
Trigger (software based)	primary event trigger (hardware based)	edge, glitch, width, runt, windows, timeout, interval, slew rate
	frame type	MISO, MOSI, MISOMOSI
	MISO	data word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; data index: selects the specific data word; conditions =, in range
	MOSI	data word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; data index: selects the specific data word; conditions =, in range
	MISOMOSI	data word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; data index: selects the specific data word; conditions =, in range
	error condition	void, length

Decode	source (MOSI, MISO, CS, CLK)	any analog or logical input channel; math or reference waveform
	display type	decoded bus, tabulated list
	color coding	frame, word, error
	data format	hex, decimal, octal, binary, ASCII
	result export	export of all result data into CSV, XML, HTML and Py file formats
Filter	The filter function selects those decode events that shall be shown in the result table. Events that do not match the criteria set will not be displayed in the table when the filter is turned on.	
	settings	same as trigger settings

QUAD-SPI triggering and decoding		
Protocol configuration	source (CS, SCLK, IO0 to IO3)	any analog or logical input channel; math or reference waveform
	bit rate	auto detected
	polarity (SCLK)	rising, falling
	polarity (CS, IO0 to IO3)	active high, active low
	instruction mode	single, dual, quad
	opcode	configurable list for opcode translation opcode list can be saved and loaded
Trigger (software based)	primary event trigger (hardware based)	edge, glitch, width, runt, windows, timeout, interval, slew rate
	frame type	data
	data	
	error condition	length, opcode
Decode	display type	decoded bus, tabulated list
	color coding	frame, word, error
	data format	hex, decimal, octal, binary, ASCII
	result export	export of all result data into CSV, XML, HTML and Py file formats
Filter	The filter function selects those decode events that shall be shown in the result table. Events that do not match the criteria set will not be displayed in the table when the filter is turned on.	
	settings	same as trigger settings

UART/RS-232/RS-422/RS-485 triggering and decoding		
Protocol configuration	bit rate	300 bps to 20 Mbps
	signal polarity	idle low, idle high
	number of bits	5 bit to 9 bit
	bit order	LSB first, MSB first
	parity	odd, even, mark, space, none
	stop bit	1, 1.5 or 2
	end of packet	timeout, none
Trigger (hardware based)	source (TX and RX)	any analog input channel or logical channel
	trigger event setup	start bit, packet start, data, parity error, stop error, break condition
	data setup	data pattern (hex, decimal, octal, binary or ASCII); condition =, ≠; offset within packet in range 0 word to 4095 words
Trigger (software based)	primary event trigger (hardware based)	edge, glitch, width, runt, windows, timeout, interval, slew rate
	frame type	TX, RX
	TX	data; conditions =, ≠, <, ≤, >, ≥, in range, out of range
	RX	data; conditions =, ≠, <, ≤, >, ≥, in range, out of range
	error condition	start, stop, parity, break

Decode	source (TX and RX)	any analog or logical input channel; math or reference waveform
	display type	decoded bus, tabulated list
	color coding	packet, data payload, start error, parity error, stop error
	data format	hex, decimal, octal, binary, ASCII
	result export	export of all result data into CSV, XML, HTML and Py file formats
Filter	The filter function selects those decode events that shall be shown in the result table. Events that do not match the criteria set will not be displayed in the table when the filter is turned on.	
	settings	same as trigger settings

Clocked NRZ (NRZC) triggering and decoding		
Protocol configuration	signal type	up to 3 selectable channels: data, clock and optional enable (CS); differential or single-ended
	min gap time	optional (off by default); range 1 ns to 1 s; indicates min idle time for gap detection and frame separation
	auto threshold setup	assisted threshold configuration
	source	any analog or logical input channel; math or reference waveform
	properties	active data state (high/low), clock edge (rising/falling/both), enable state (high/low)
Frame format	frame separation	gap or enable (CS) signal
	frame	multiple frame management, frame identification and sync, variable length frames, variable number of cells
	cells	name, size (bit count), condition, numeric format, bit order, RGB color, result column
Trigger (software based)	file storage of frame format	save/load as xml files
	primary event trigger (hardware based)	edge, glitch, width, runt, windows, timeout, interval, slew rate
	variants	all supported bit encodings
	trigger event setup	frame start pattern advanced trigger gap, start bit
	frame start	frame type (with OR combinations), frame fields (with AND combinations), frame field data; conditions =, ≠, <, ≤, >, ≥, in range, out of range for data count, word count, data value; error types
Decode	display type	decoded bus, logical signal, bus signal, tabulated list, result details, decode layers
	color coding	according to cell configuration table
	data format	according to cell configuration table
	decode layer	edges, binary
	result export	export of all result data into CSV, XML, HTML and Py file formats
Filter	The filter function selects those decode events that shall be shown in the result table. Events that do not match the criteria set will not be displayed in the table when the filter is turned on.	
	settings	same as trigger settings

Unclocked NRZ (NRZU) triggering and decoding		
Protocol configuration	signal type	up to 2 selectable channels: data and optional enable (CS); differential or single-ended
	min gap time	optional (off by default); range 1 ns to 1 s; indicates min idle time for gap detection and frame separation
	bit rate	optional (off by default); if not provided, it will be automatically calculated
	auto threshold setup	assisted threshold configuration
	source	any analog or logical input channel; math or reference waveform
	properties	active data state (high/low), enable state (high/low)
	frame separation	gap or enable (CS) signal
Frame format	frame	multiple frame management, frame identification and sync, variable length frames, variable number of cells
	cells	name, size (bit count), condition, numeric format, bit order, RGB color, result column
	file storage of frame format	save/load as xml files
Trigger (software based)	primary event trigger (hardware based)	edge, glitch, width, runt, windows, timeout, interval, slew rate
	variants	all supported bit encodings
	trigger event setup	frame start pattern advanced trigger
	frame start	gap, start bit
	advanced trigger	frame type (with OR combinations), frame fields (with AND combinations), frame field data; conditions =, ≠, <, ≤, >, ≥, in range, out of range for data count, word count, data value; error types
	display type	decoded bus, logical signal, bus signal, tabulated list, result details, decode layers
	color coding	according to cell configuration table
Decode	data format	according to cell configuration table
	decode layer	edges, binary
Filter	result export	export of all result data into CSV, XML, HTML and Py file formats
	The filter function selects those decode events that shall be shown in the result table. Events that do not match the criteria set will not be displayed in the table when the filter is turned on.	
	settings	same as trigger settings

Manchester triggering and decoding		
Protocol configuration	signal type	up to 2 selectable channels: data and optional enable (CS); differential or single-ended
	data phase	first/second edge
	min gap time	optional (off by default); range 1 ns to 1 s; indicates min idle time for gap detection and frame separation
	bit rate	optional (off by default); if not provided, it will be automatically calculated
	source	any analog or logical input channel; math or reference waveform
	properties	active data state (high/low), enable state (high/low)
	frame separation	gap or enable (CS) signal

Frame format	frame	multiple frame management, frame identification and sync, variable length frames, variable number of cells
	cells	name, size (bit count), condition, numeric format, bit order, RGB color, result column
	file storage of frame format	save/load as xml files
Trigger (software based)	primary event trigger (hardware based)	edge, glitch, width, runt, windows, timeout, interval, slew rate
	variants	all supported bit encodings
	trigger event setup	frame start pattern advanced trigger
	frame start	gap, start bit
	advanced trigger	frame type (with OR combinations), frame fields (with AND combinations), frame field data; conditions =, ≠, <, ≤, >, ≥, in range, out of range for data count, word count, data value; error types
	display type	decoded bus, tabulated list, result details, decode layers
Decode	color coding	according to cell configuration table
	data format	according to cell configuration table
	decode layer	edges, binary
	result export	export of all result data into CSV, XML, HTML and Py file formats
Filter	The filter function selects those decode events that shall be shown in the result table. Events that do not match the criteria set will not be displayed in the table when the filter is turned on.	
	settings	same as trigger settings

## R&S®MXO5-K520 automotive protocols

### CAN FD/XL triggering and decoding

Protocol configuration	signal type	CAN_H, CAN_L
	bit rate	
	nominal bit rate	100 kbps to 1 Mbps
	FD data rate	100 kbps to 15 Mbps
	XL data rate	100 kbps to 15 Mbps
	sampling point	30 % to 90 % within bit period; independent settings for nominal bit rate, FD data rate and XL data rate
	device list	associate frame identifier with symbolic ID, load DBC file content
Trigger (hardware based)	source	any analog input channel or logical channel
	trigger event setup	start of frame, frame type, identifier, identifier + data, error condition (any combination of CRC error, bit stuffing error, form error and ACK error)
	identifier setup	identifier type (standard or extended); condition =, ≠, ≥, ≤, in range, out of range
	FD bits	FDF, BRS and ESI (0, 1, X)
	XL setup	SDT, VCID, AF; condition =, ≠, ≥, ≤, in range, out of range
	data setup	data pattern up to 8 byte (hex, decimal, octal, binary or ASCII); condition =, ≠

Trigger (software based)	primary event trigger (hardware based)	edge, glitch, width, runt, windows, timeout, interval, slew rate
	frame type	CBFF, CBFF-R, CEFF, CEFF-R, FBFF, FEFF, XLFF, overload, error
	CBFF	ID, DLC; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; data word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; data index: selects the specific data word; conditions =, in range
	CBFF-R	ID, DLC; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options
	CEFF	EXT-ID, DLC; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; data word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; data index: selects the specific data word; conditions =, in range
	CEFF-R	EXT-ID, DLC; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options
	FBFF	ID, DLC; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; BRS, ESI; value 0, 1 for each of these options; data word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; data index: selects the specific data word; conditions =, in range
	FEFF	ID, DLC; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; BRS, ESI; value 0, 1 for each of these options; data word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; data index: selects the specific data word; conditions =, in range
	XLFF	Priority ID, SDT, DLC, VCID, AF; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; SEC; value 0, 1; data word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; data index: selects the specific data word; conditions =, in range
	error condition	EOF, ack delimiter, no ack, CRC delimiter, CRC, stuff count, form, bit stuffing, unknown

Decode	source	any analog or logical input channel; math or reference waveform
	display type	decoded bus, tabulated list
	color coding	start of frame, identifier, DLC, ADS, SDT, VCID, AF, data payload, CRC, end of frame, error frame, overload frame, CRC error, bit stuffing error
	data format	hex, decimal, octal, binary, ASCII, symbolic
	result export	export of all result data into CSV, XML, HTML and Py file formats
Filter	The filter function selects those decode events that shall be shown in the result table. Events that do not match the criteria set will not be displayed in the table when the filter is turned on.	
	settings	same as trigger settings

LIN triggering and decoding		
Protocol configuration	version	1.3, 2.x or SAE J602; mixed traffic is supported
	bit rate	1 kbps to 20 Mbps
Trigger (hardware based)	source	any analog input channel or logical channel
	trigger event setup	start of frame (sync break), identifier, identifier + data, wake-up frame, error condition (any combination of checksum error, parity error and sync field error)
	identifier setup	range from 0d to 63d; condition =, ≠, ≥, ≤, in range, out of range
	data setup	data pattern up to 8 byte (hex, decimal, octal, binary or ASCII); condition =, ≠
Trigger (software based)	primary event trigger (hardware based)	edge, glitch, width, runt, windows, timeout, interval, slew rate
	frame type	data, wake up, unknown
	data	Id; conditions =, ≠, <, ≤, >, ≥, in range, out of range; data word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; data index: selects the specific data word; conditions =, in range
	error condition	checksum, parity, start, sync, length
Decode	source	any analog or logical input channel; math or reference waveform
	display type	decoded bus, tabulated list
	color coding	frame, frame identifier, data payload, checksum, error condition
	data format	hex, decimal, octal, binary, ASCII
	result export	export of all result data into CSV, XML, HTML and Py file formats
Filter	The filter function selects those decode events that shall be shown in the result table. Events that do not match the criteria set will not be displayed in the table when the filter is turned on.	
	settings	same as trigger settings

SENT triggering and decoding		
Protocol configuration	signal type	data signal
	clock period (clock tick)	1 $\mu$ s to 100 $\mu$ s
	clock tolerance	0 % to 25 %
	data nibbles	1 to 6
	serial message type	none, short serial message and enhanced serial message
	CRC version	Legacy (Feb 2008) and v2010 (Latest)
	CRC calculation	SAE J2716 standard and TLE 4998X
	pause pulse	no, yes, for constant frame length
	frame length in clock ticks (applicable only when pause pulse = constant frame length)	104 to 922
Trigger (software based)	primary event trigger (hardware based)	edge, glitch, width, runt, windows, timeout, interval, slew rate
	trigger event setup	calibration or sync, transmission sequence, serial message and error condition
	transmission sequence status nibble setup	from 0 to F, condition =, $\neq$ , $\geq$ , $\leq$ , in range, out of range
	transmission sequence data nibbles setup	each nibble value from 0 to F, condition =, $\neq$ , $\geq$ , $\leq$ , in range, out of range
	serial message identifier setup	from 00 to FF, condition =, $\neq$ , $\geq$ , $\leq$ , in range, out of range
	serial message identifier type setup (applicable only when the serial protocol = enhanced serial message in protocol configuration)	4 bit and 8 bit
	serial message data setup	00 to FF (short serial message) 000 to FFF (enhanced serial message with 8 bit ID) 0000 to FFFF (enhanced serial message with 4 bit ID)
	error condition setup	form error, calibration pulse error, pulse period error, CRC error and irregular frame length error
Decode	source	any analog or logical input channel; math or reference waveform
	display type	decoded bus, tabulated list
	color coding	transmission sequence: sync/calibration, status, data bits, CRC, pause pulse (optional), calibration pulse error, pulse period error, irregular frame length error and CRC error; serial message: identifier, data, CRC, form error, CRC error
	data format	hex, decimal, octal, binary, ASCII
	result export	export of all result data into CSV, XML, HTML and Py file formats
Filter	The filter function selects those decode events that shall be shown in the result table. Events that do not match the criteria set will not be displayed in the table when the filter is turned on.	
	settings	same as trigger settings

## R&S®MXO5-K530 aerospace protocols

ARINC 429 triggering and decoding		
Protocol configuration	bit rate	high (100 kbps), low (12.0 kbps to 14.5 kbps)
	signal polarity	A leg, B leg
	min. gap	0 to 100 bit, off
	max. gap	0 to 1000 bit, off
Trigger (software based)	primary event trigger (hardware based)	edge, glitch, width, runt, windows, timeout, interval, slew rate
	frame type	ARINC429-word
	ARINC429-word	label, SDI, data, SSM; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options
	error condition	coding, parity, unknown, gap
Decode	source	any analog channel, math or reference waveform
	display type	decoded bus, tabulated list, decode layers
	color coding	for different cell types
	data format	hex, decimal, octal, binary, ASCII
	decode layer	off, ternary symbols, bits, words
	result export	export of all result data into CSV, XML, HTML and Py file formats
Filter	The filter function selects those decode events that shall be shown in the result table. Events that do not match the criteria set will not be displayed in the table when the filter is turned on.	
	settings	same as trigger settings

MIL-STD-1553 triggering and decoding		
Protocol configuration	signal type	single-ended
	bit rate	standard bit rate (1 Mbit/s)
	polarity	normal, inverted
	device list	associate frame identifier with symbolic ID
	auto threshold setup	assisted threshold configuration
	timing	min. gap (2 µs to 262 µs) or off; max. response (2 µs to 262 µs) or off
Trigger (software based)	primary event trigger (hardware based)	edge, glitch, width, runt, windows, timeout, interval, slew rate
	frame type	command, status, cmd/status, data
	command	RTA, Info; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; P value 0, 1
	status	RTA, Info; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; P value 0, 1
	cmd/Status	RTA, Info; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; P value 0, 1
	data	data word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; data index: selects the specific data word; conditions =, in range; P value 0, 1
	error condition	sync, Manchester coding, parity, gap, response timeout
Decode	source	any analog channel, math or reference waveform
	display type	decoded bus, logical signal, bus + logical signal, tabulated list
	color coding	frame (word), sync, RTA, status bit field, parity, data field, error condition
	data format	hex, octal, binary, ASCII, signed, unsigned
Filter	The filter function selects those decode events that shall be shown in the result table. Events that do not match the criteria set will not be displayed in the table when the filter is turned on.	
	settings	same as trigger settings

SpaceWire triggering and decoding		
Protocol configuration	signal type	two channels: strobe and data (differential or single-ended)
	bit rate	auto adjust (strobe + data)
	auto threshold setup	assisted threshold configuration
	timing	min. gap (1 ns to 1 s)
Trigger (software based)	primary event trigger (hardware based)	edge, glitch, width, runt, windows, timeout, interval, slew rate
	frame type	data, time, FCT, null, EOP, EEP, bad esc
	data	conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options
	time	conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options
	bad esc	conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; P value 0, 1
	error condition	parity error, length error
Decode	source	any analog channel, math or reference waveform
	display type	decoded bus, logical signal, bus + logical signal, tabulated list, decode layers
	color coding	control frame, data frame, null frame, time code
	data format	hex, octal, binary, ASCII, signed, unsigned
	result export	export of all result data into CSV, XML, HTML and Py file formats
Filter	The filter function selects those decode events that shall be shown in the result table. Events that do not match the criteria set will not be displayed in the table when the filter is turned on.	
	settings	same as trigger settings

## R&S®MXO5-K550 MIPI low speed protocols

SPMI triggering and decoding		
Protocol configuration	bit rate	auto detected
	supported version	2.0
	GSID	selectable in range 0 to 15
Trigger (software based)	primary event trigger (hardware based)	edge, glitch, width, runt, windows, timeout, interval, slew rate
	frame type	register 0 write, register write, register read, extended register write, extended register read, extended register write long, extended register read long, main write, main read
	register 0 write setup	sub address, data word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; ack
	register write/read	sub address, register address, data word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; ack (write only)
	extended register write/read	sub address, byte count, register address, data word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; data index: selects the specific data word; conditions =, in range; ack (write only)
	extended register write long/read long	sub address, byte count, register address, register address 2, data word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; data index: selects the specific data word; conditions =, ≠, <, ≤, >, ≥, in range; ack (write only)

	main write/read	main address, register address, data word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; frame byte; conditions =, ≠, <, ≤, >, ≥, in range; ack (write only)
	error condition	no response, ack, bus park, parity, length, arbitration, SSC, command, coding
Decode	source (SCLK and SDATA)	any analog or logical input channel; math or reference waveform
	display type	decoded bus, tabulated list, details, decode layers
	color coding	arbitration sequence, command sequence, sequence start condition, device address, command, byte count, register address, data payload, parity bits, bus park cycle, ack, error
	data format	hex, decimal, octal, binary, ASCII
	decode layer	off, edges, bit
	result export	export of all result data into CSV, XML, HTML and Py file formats
Filter	The filter function selects those decode events that shall be shown in the result table. Events that do not match the criteria set will not be displayed in the table when the filter is turned on.	
	settings	same as trigger settings

RFFE triggering and decoding		
Protocol configuration	signal type	two channel, single-ended
	bit rate	auto detected
	source (SCLK, SDATA)	any analog or logical input channel; math or reference waveform
	supported version	1.X, 2.0, 2.1 and 3.1
	read mode	standard or read mode
	glitch filter	configurable glitch filter
	gap detection	detect gaps between sequences
Trigger (software based)	primary event trigger (hardware based)	edge, glitch, width, runt, windows, timeout, interval, slew rate
	trigger event setup	sequence start, sequence stop, register 0 write, register write, register read, extended register write, extended register read, extended register write long, extended register read long, error condition types
	sequence start setup	4 bit sub device address; conditions =, ≠, <, ≤, >, ≥, in range, out of range
	sequence stop setup	4 bit sub device address; conditions =, ≠, <, ≤, >, ≥, in range, out of range
	register 0 write setup	4 bit sub device address, 7 bit data word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options
	register write/read	4 bit sub device address, 5 bit register address, 8 bit data word; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options
	extended register write/read	4 bit sub device address; 8 bit address, byte count: 0 to 15 (inclusive), data pattern: 1 to 16 byte (hex or binary); conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; index: 1 to 16 selects the specific data frame byte; conditions =, ≠, <, ≤, >, ≥, in range

	extended register write long/read long	4 bit sub device address, 8 bit address, byte count: 0 to 7 (inclusive), data pattern: 0 to 8 byte (hex or binary); conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; index: 1 to 8 selects the specific data frame byte; conditions =, ≠, <, ≤, >, ≥, in range
	interrupt summary and notification	4 bit sub device address, bit count 0 to 32, notification and interrupt bits
	masked write	4 bit sub device address; 8 bit address, 8 bit mask, 8 bit data pattern; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; frame byte; conditions =, ≠, <, ≤, >, ≥, in range
	main device ownership handover	2 bit MID; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; frame byte; conditions =, ≠, <, ≤, >, ≥, in range
	main device write/read	2 bit MID, 8 bit address, 16 bit data pattern; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; frame byte; conditions =, ≠, <, ≤, >, ≥, in range
	main device context transfer write/read	2 bit MID, 8 bit byte count, 8 bit address, data pattern: 1 to 8 byte (hex or binary); conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; index: 1 to 256 selects the specific data frame byte; conditions =, ≠, <, ≤, >, ≥, in range
	error condition	SSC error; length error, bus park error, parity error, no response, unknown sequence, version error, min. gap between frames: 1 ns to 10 us
Decode	display type	decoded bus, logical signal, bus + logical signal, tabulated list, decode layers
	color coding	sequence, frame, error
	data format	hex, octal, binary, ASCII, signed, unsigned
	decode layer	off, edges, bit
	result export	export of all result data into CSV, XML, HTML and Py file formats
Filter	The filter function selects those decode events that shall be shown in the result table. Events that do not match the criteria set will not be displayed in the table when the filter is turned on.	
	settings	same as trigger settings

I <sup>3</sup> C triggering and decoding			
Protocol configuration	signal type	two channel, single-ended	
	bit rate	auto detected	
	source (SCL, SDA)	any analog or logical input channel; math or reference waveform	
	gap detection	detect gaps between sequences	
Trigger (software based)	primary event trigger (hardware based)	edge, glitch, width, runt, windows, timeout, interval, slew rate	
	frame type	I <sup>3</sup> C probe, read, write, CCC broadcast, CCC direct, HDR-DDR, HDR-ternary	
	I <sup>3</sup> C probe	reserved; conditions =, ≠, <, ≤, >, ≥, in range, out of range; R/W; value 0, 1 ACK; value 0, 1	
	read	address; conditions =, ≠, <, ≤, >, ≥, in range, out of range; R/W; value 0, 1 ACK-A; value 0, 1 data; conditions =, ≠, <, ≤, >, ≥, in range, out of range; data index: selects the specific data word; conditions =, in range	
	write	address; conditions =, ≠, <, ≤, >, ≥, in range, out of range; R/W; value 0, 1 ACK-A; value 0, 1 data; conditions =, ≠, <, ≤, >, ≥, in range, out of range for each of these options; data index: selects the specific data word; conditions =, in range	
	CCC broadcast	reserved; conditions =, ≠, <, ≤, >, ≥, in range, out of range; R/W; value 0, 1 ACK-A; value 0, 1 ccc; conditions =, ≠, <, ≤, >, ≥, in range, out of range; data; conditions =, ≠, <, ≤, >, ≥, in range, out of range; data index: selects the specific data word; conditions =, in range	
	CCC broadcast	reserved; conditions =, ≠, <, ≤, >, ≥, in range, out of range; R/W; value 0, 1 ACK-A; value 0, 1 ccc; conditions =, ≠, <, ≤, >, ≥, in range, out of range; data; conditions =, ≠, <, ≤, >, ≥, in range, out of range; data index: selects the specific data word; conditions =, in range	
Trigger (hardware based)	HDR-DDR	command; conditions =, ≠, <, ≤, >, ≥, in range, out of range; address; conditions =, ≠, <, ≤, >, ≥, in range, out of range; data; conditions =, ≠, <, ≤, >, ≥, in range, out of range; data index: selects the specific data word; conditions =, in range p; conditions =, ≠, <, ≤, >, ≥, in range, out of range; p index: selects the specific data word; conditions =, in range crc; conditions =, ≠, <, ≤, >, ≥, in range, out of range;	

	HDR-ternary	R/W; value 0, 1 command; conditions =, ≠, <, ≤, >, ≥, in range, out of range; address; conditions =, ≠, <, ≤, >, ≥, in range, out of range; data; conditions =, ≠, <, ≤, >, ≥, in range, out of range; data index: selects the specific data word; conditions =, in range p; conditions =, ≠, <, ≤, >, ≥, in range, out of range; p index: selects the specific data word; conditions =, in range
	error condition	ACK, parity, CRC, length, unknown
Decode	source (clock and data)	any input channel, logical channel
	display type	decoded bus, tabulated list
	color coding	frame, field types, status
	data format	hex, decimal, octal, binary, ASCII
	result export	export of all result data into CSV, XML, HTML and Py file formats
Filter	The filter function selects those decode events that shall be shown in the result table. Events that do not match the criteria set will not be displayed in the table when the filter is turned on.	
	settings	same as trigger settings

## R&S®MXO5-K560 automotive Ethernet protocols

10BASE-T1S triggering and decoding		
Protocol configuration	source	any analog input channel, math or reference waveform
	threshold	upper/lower
Trigger (software based)	primary event trigger (hardware based)	edge, glitch, width, runt, windows, timeout, interval, slew rate
	frame type	MAC, COMMIT, BEACON or unknown
	MAC frame setup	destination address (condition =, ≠, <, >, ≥, ≤, in range, out of range), source address (condition =, ≠, <, >, ≥, ≤, in range, out of range), length/type (condition =, ≠, <, >, ≥, ≤, in range, out of range), data (condition =, ≠, <, >, ≥, ≤, in range, out of range), data index (condition =, in range)
	error condition setup	preamble, SFD, ESD, CRC
Decode	display type	decoded bus, tabulated list, details, decode layers
	color coding	for different cell types
	data format	hex, decimal, octal, binary, signed, unsigned, ASCII
	decode layer	reversed bits, descrambled bits, scrambled bits, ternary symbols
	result export	export of all result data into CSV, XML, HTML and Py file formats
Filter	The filter function selects those decode events that shall be shown in the result table. Events that do not match the criteria set will not be displayed in the table when the filter is turned on.	
	settings	same as trigger settings

**100BASE-T1 triggering and decoding**

Protocol configuration	source	any analog input channel, math waveform, reference waveform
	polarity	normal, inverted
	mode	main, subordinate, auto
Trigger (software based)	primary event trigger (hardware based)	edge, glitch, width, runt, windows, timeout, interval, slew rate
	frame type	MAC, fill, idle or unknown
	MAC frame setup	destination address (condition =, ≠, <, >, ≥, ≤, in range, out of range), source address (condition =, ≠, <, >, ≥, ≤, in range, out of range), length/type (condition =, ≠, <, >, ≥, ≤, in range, out of range), data (condition =, ≠, <, >, ≥, ≤, in range, out of range), data index (condition =, in range)
	error condition setup	preamble, SFD, length, CRC, uncorrelated
Decode	display type	decoded bus, tabulated list, details, decode layers
	color coding	for different cell types
	data format	hex, decimal, octal, binary, signed, unsigned, ASCII
	decode layer	reversed bits, descrambled bits, scrambled bits, ternary symbols
	result export	export of all result data into CSV, XML, HTML and Py file formats
Filter	The filter function selects those decode events that shall be shown in the result table. Events that do not match the criteria set will not be displayed in the table when the filter is turned on.	
	settings	same as trigger settings

**1000BASE-T1 triggering and decoding**

Protocol configuration	source	any analog input channel, math waveform, reference waveform; differential or single-ended
	polarity	normal, inverted
	mode	main, subordinate, auto
Trigger (software based)	primary event trigger (hardware based)	edge, glitch, width, runt, windows, timeout, interval, slew rate
	frame type	MAC, idle, OAM, Reed Solomon, block header, control address, control code, ternary zero, or unknown
	MAC frame setup	destination address (condition =, ≠, <, >, ≥, ≤, in range, out of range), source address (condition =, ≠, <, >, ≥, ≤, in range, out of range), length/type (condition =, ≠, <, >, ≥, ≤, in range, out of range), data (condition =, ≠, <, >, ≥, ≤, in range, out of range), data index (condition =, in range)
	error condition setup	preamble, SFD, length, CRC, uncorrelated
Decode	display type	decoded bus, tabulated list, details, decode layers
	color coding	for different cells types
	data format	hex, decimal, octal, binary, signed, unsigned, ASCII
	decode layer	ternary symbols, scrambled bits, descrambled bits, corrected RS-FEC
	filter	filter result table on frame types, field values, status
	result export	export of all result data into CSV, XML, HTML and Py file formats

Filter	The filter function selects those decode events that shall be shown in the result table. Events that do not match the criteria set will not be displayed in the table when the filter is turned on.	
	settings	same as trigger settings

## R&S®MXO5-K570 USB protocols

### USB 1.1/2.0 triggering and decoding

Protocol configuration	signal type	single-ended, differential
	protocol type	low, full, high speed
	bit rate	standard bit rates (1.5/12/480 Mbit/s)
	source	any analog input channel; math or reference waveform
Trigger (software based)	primary event trigger (hardware based)	edge, glitch, width, runt, windows, timeout, interval, slew rate
	trigger event setup	start of packet; frame types: token (IN, OUT, SOF, SETUP), data (DATA0, DATA1, DATA2 <sup>9</sup> , MDATA <sup>9</sup> ), handshake (ACK, NAK, STALL, NYET <sup>9</sup> ), special (PRE/ERR, SPLIT <sup>9</sup> , PING <sup>9</sup> , Reserved <sup>9</sup> ); error conditions (PID error, CRC error, length error, bit-stuffing error, incomplete)
	frame detail setup (field conditions)	condition =, ≠, ≥, ≤, in range, out of range
	data setup	byte search (hex, decimal, octal, binary or ASCII), bit separately configurable (1, 0 or don't care); condition =, ≠; position-based or range-based triggering (first occurrence in packet payload)
	error condition	PID error, CRC error, bit-stuffing error, length error
Decode	source	any input channel, math waveform
	display type	decoded bus, logical signal, bus + logical signal, tabulated list
	color coding	packet identifier, payload length, frame, address, endpoint, data payload, CRC5, CRC16, error condition
	data format	hexadecimal, decimal, octal, binary, ASCII, unsigned
Filter	The filter function selects those decode events that shall be shown in the result table. Events that do not match the criteria set will not be displayed on the table when the filter is turned on.	
	settings	same as trigger settings

<sup>9</sup> Only available in USB2.0 (high speed).

# Ordering information

Designation	Type	Order No.
<b>MXO 5 series, base models</b>		
Oscilloscope, 350 MHz, 4 channels	MXO54	1802.1008K04
Oscilloscope, 100 MHz, 8 channels	MXO58	1802.1008K08
Base unit (including standard accessories: 700 MHz passive probe (10:1) per channel, accessories bag, quick start guide, power cord)		
<b>Choose your bandwidth upgrade</b>		
Upgrade of MXO 54 to 500 MHz bandwidth	R&S®MXO5-B245	1802.0676.02
Upgrade of MXO 54 to 1 GHz bandwidth	R&S®MXO5-B2410	1802.0682.02
Upgrade of MXO 54 to 2 GHz bandwidth	R&S®MXO5-B2420	1802.0699.02
Upgrade of MXO 58 to 200 MHz bandwidth	R&S®MXO5-B282	1802.0701.02
Upgrade of MXO 58 to 350 MHz bandwidth	R&S®MXO5-B283	1802.0718.02
Upgrade of MXO 58 to 500 MHz bandwidth	R&S®MXO5-B285	1802.0724.02
Upgrade of MXO 58 to 1 GHz bandwidth	R&S®MXO5-B2810	1802.0730.02
Upgrade of MXO 58 to 2 GHz bandwidth	R&S®MXO5-B2820	1802.0747.02
<b>Choose your options</b>		
Mixed signal option, for MXO 5 series with 16 digital channels	R&S®MXO5-B1	1802.0660.02
Arbitrary waveform generator, 100 MHz, 2 analog channels	R&S®MXO5-B6	1802.0753.02
Additional M.2 SSD	R&S®MXO5-B19	1803.0205.02
Memory option 1 Gpoint	R&S®MXO5-B110	1803.0211.02
Basic jitter analysis	R&S®MXO5-K12	1802.1295.02
Power analysis	R&S®MXO5-K31	1802.0799.02
Frequency response analysis	R&S®MXO5-K36	1802.1943.02
Eye analysis	R&S®MXO5-K136	1801.8621.02
Bus analysis	R&S®MXO5-K500	1802.1308.02
Low speed serial buses (I <sup>2</sup> C/SPI/QuadSPI/UART/RS-232/RS-422/RS-485/NRZ clocked/ NRZ unclocked/Manchester)	R&S®MXO5-K510	1802.1243.02
Automotive protocols (CAN/CAN FD/CAN XL/LIN/SENT)	R&S®MXO5-K520	1802.1920.02
Aerospace protocols (ARINC 429/MIL-STD-1553/SpaceWire)	R&S®MXO5-K530	1802.1266.02
MIPi low speed protocols (SPMI/RFFE/I <sup>2</sup> C)	R&S®MXO5-K550	1802.1272.02
Automotive Ethernet protocols (10BASE-T1S/100BASE-T1/1000BASE-T1)	R&S®MXO5-K560	1802.1250.02
USB protocols (USB 1.1/2.0)	R&S®MXO5-K570	1801.9028.02
Application bundle, consists of the following options: R&S®MXO5-B6, R&S®MXO5-K31, R&S®MXO5-K36, R&S®MXO5-K510, R&S®MXO5-K520	R&S®MXO5-PK1	1803.0257.02
R&S®ScopeSuite+, base option	R&S®SPLUS	1804.8800.02
R&S®ScopeSuite+, 100BASE-T1 automotive Ethernet compliance test	R&S®SPLUS-K24	1804.8774.02
R&S®ScopeSuite+, 1000BASE-T1 automotive Ethernet compliance test	R&S®SPLUS-K87	1804.8797.02
R&S®ScopeSuite+, 10BASE-T1S automotive Ethernet compliance test	R&S®SPLUS-K89	1804.8780.02
R&S®ScopeSuite+, remote automation API	R&S®SPLUS-K99	1804.8945.02
R&S®ScopeStudio Software	R&S®MXO-PC	1801.9005.02
R&S®ScopeStudio protocol decode option	R&S®MXO-PC-K1	1804.8874.02
<b>Choose your additional probes</b>		
Single-ended passive probes		
700 MHz, 10 MΩ, 10:1, 400 V, 9.5 pF, 2.5 mm	R&S®RT-ZP11	1803.0005.02
500 MHz, 10 MΩ, 10:1, 400 V, 9.5 pF, 2.5 mm	R&S®RT-ZP10	1409.7550.00
500 MHz, 10 MΩ, 10:1, 300 V, 10 pF, 5 mm	R&S®RT-ZP05M	1335.3505.02
700 MHz, 14.9 MΩ, 25:1, 30 V, 4 pF, MMCX	R&S®RT-ZPMMCX	1803.1599.02
38 MHz, 1 MΩ, 1:1, 55 V, 39 pF, 2.5 mm	R&S®RT-ZP1X	1333.1370.02
Active broadband probes: single-ended		
1.0 GHz, active, 1 MΩ, Rohde & Schwarz probe interface	R&S®RT-ZS10E	1418.7007.02
1.0 GHz, active, 1 MΩ, R&S®ProbeMeter, micro button, Rohde & Schwarz probe interface	R&S®RT-ZS10	1410.4080.02
1.5 GHz, active, 1 MΩ, R&S®ProbeMeter, micro button, Rohde & Schwarz probe interface	R&S®RT-ZS20	1410.3502.02
Active broadband probes: differential		
1.0 GHz, active, differential, 1 MΩ, R&S®ProbeMeter, micro button, incl. 10:1 external attenuator, 1 MΩ, 60 V DC, 42.4 V AC (peak), Rohde & Schwarz probe interface	R&S®RT-ZD10	1410.4715.02
1.5 GHz, active, differential, 1 MΩ, R&S®ProbeMeter, micro button, Rohde & Schwarz probe interface	R&S®RT-ZD20	1410.4409.02
Power rail probe		
2.0 GHz, 1:1, 50 kΩ, ±0.85 V, ±60 V offset, Rohde & Schwarz probe interface	R&S®RT-ZPR20	1800.5006.02

Designation	Type	Order No.
<b>High voltage probes: passive</b>		
250 MHz, 100:1, 100 MΩ, 850 V, 6.5 pF	R&S®RT-ZH03	1333.0873.02
400 MHz, 100:1, 50 MΩ, 1000 V, 7.5 pF	R&S®RT-ZH10	1409.7720.02
400 MHz, 1000:1, 50 MΩ, 1000 V, 7.5 pF	R&S®RT-ZH11	1409.7737.02
<b>High voltage probes: differential</b>		
200 MHz, 250:1/25:1, 5 MΩ, 750 V (peak), 300 V CAT III, Rohde & Schwarz probe interface	R&S®RT-ZHD07	1800.2307.02
100 MHz, 500:1/50:1, 10 MΩ, 1500 V (peak), 1000 V CAT III, Rohde & Schwarz probe interface	R&S®RT-ZHD15	1800.2107.02
200 MHz, 500:1/50:1, 10 MΩ, 1500 V (peak), 1000 V CAT III, Rohde & Schwarz probe interface	R&S®RT-ZHD16	1800.2207.02
100 MHz, 1000:1/100:1, 40 MΩ, 6000 V (peak), 1000 V CAT III, Rohde & Schwarz probe interface	R&S®RT-ZHD60	1800.2007.02
<b>Current probes</b>		
20 kHz, AC/DC, 0.01 V/A and 0.001 V/A, ±200 A and ±2000 A, BNC interface	R&S®RT-ZC02	1333.0850.02
100 kHz, AC/DC, 0.1 V/A, 30 A, BNC interface	R&S®RT-ZC03	1333.0844.02
2 MHz, AC/DC, 0.01 V/A, 500 A (RMS), Rohde & Schwarz probe interface	R&S®RT-ZC05B	1409.8204.02
10 MHz, AC/DC, 0.01 V/A, 150 A (RMS), BNC interface	R&S®RT-ZC10	1409.7750.02
10 MHz, AC/DC, 0.01 V/A, 150 A (RMS), Rohde & Schwarz probe interface	R&S®RT-ZC10B	1409.8210.02
50 MHz, AC/DC, 0.1 V/A, 30 A (RMS), Rohde & Schwarz probe interface	R&S®RT-ZC15B	1409.8227.02
100 MHz, AC/DC, 0.1 V/A, 30 A (RMS), BNC interface	R&S®RT-ZC20	1409.7766.02
100 MHz, AC/DC, 0.1 V/A, 30 A (RMS), Rohde & Schwarz probe interface	R&S®RT-ZC20B	1409.8233.02
120 MHz, AC/DC, 1 V/A, 5 A (RMS), BNC interface	R&S®RT-ZC30	1409.7772.02
<b>EMC near-field probe</b>		
Probe set for E and H near-field measurements, 30 MHz to 3 GHz	R&S®HZ-15	1147.2736.02
<b>Logic probe <sup>10</sup></b>		
400 MHz logic probe, 8 channels	R&S®RT-ZL04	1333.0721.02
<b>Probe accessories</b>		
Accessory set, for R&S®RT-ZP11 passive probe (2.5 mm probe tip)	R&S®RT-ZA1	1409.7566.02
Probe power supply, for R&S®RT-ZC10/-ZC20/-ZC30 current probes	R&S®RT-ZA13	1409.7789.02
External attenuator 10:1, 2.0 GHz, 1.3 pF, 60 V DC, 42.4 V AC (peak), for R&S®RT-ZD20/-ZD30 probes	R&S®RT-ZA15	1410.4744.02
Probe pouch for the logic probes	R&S®RT-ZA19	1335.7875.02
Power deskew and calibration test fixture	R&S®RT-ZF20	1800.0004.02
3D positioner with central tensioning knob for easy clamping and positioning of probes (span width: 200 mm, clamping range: 15 mm)	R&S®RT-ZAP	1326.3641.02
Bipod probe positioner	R&S®RT-ZA29	1801.4803.02
<b>Choose your accessories</b>		
Rackmount kit, for MXO 5 series with 8 HU	R&S®ZZA-MXO5	1802.3181.02
Front cover	R&S®MXO5-Z1	1803.0240.02
Soft case (W × H × D: 550 mm × 300 mm × 340 mm)	R&S®MXO5-Z3	1803.0228.02
Transit case (W × H × D: 613 mm × 478 mm × 337 mm)	R&S®MXO5-Z4	1803.1560.02
VESA adapter	R&S®MXO5-Z7	1803.0457.02
VESA mount (compatible with standard 100 mm × 100 mm pattern)	Choose industry standard mounts according to FDMI MIS-D, up to 14 kg with M4x10 screws	

<sup>10</sup> The R&S®MXO5-B1 mixed signal option contains two R&S®RT-ZL04 logic probes.

## Warranty and service

<b>Warranty</b>		
Base unit		1 year
All other items		1 year
<b>Service options</b>		
	<b>Service plans</b>	<b>On demand</b>
Calibration	up to five years <sup>11</sup>	pay per calibration
Warranty and repair	up to five years <sup>11</sup>	standard price repair
Contact your Rohde & Schwarz sales office for further details.		

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and other countries.

<sup>11</sup> For extended periods, contact your Rohde & Schwarz sales office.





## Service at Rohde & Schwarz

### You're in great hands

- Worldwide
- Local and personalized
- Customized and flexible
- Uncompromising quality
- Long-term dependability

## Rohde & Schwarz

The Rohde & Schwarz technology group is among the trailblazers when it comes to paving the way for a safer and connected world with its leading solutions in test & measurement, technology systems and networks & cybersecurity. Founded more than 90 years ago, the group is a reliable partner for industry and government customers around the globe. The independent company is headquartered in Munich, Germany and has an extensive sales and service network with locations in more than 70 countries.

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)



Mess- und Prüftechnik. Die Experten.

**Ihr Ansprechpartner /**  
**Your Partner:**

**dataTec AG**

E-Mail: [info@datatec.eu](mailto:info@datatec.eu)

[>> www.datatec.eu](http://www.datatec.eu)

### Sustainable product design

- Environmental compatibility and eco-footprint
- Energy efficiency and low emissions
- Longevity and optimized total cost of ownership

Certified Quality Management  
**ISO 9001**

Certified Environmental Management  
**ISO 14001**

### More Rohde & Schwarz certificates



### Rohde & Schwarz training

[www.training.rohde-schwarz.com](http://www.training.rohde-schwarz.com)

### Rohde & Schwarz customer support

[www.rohde-schwarz.com/support](http://www.rohde-schwarz.com/support)



R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG

Trade names are trademarks of the owners

PD 3683.8196.22 | Version 14.00 | December 2025 (sk)

MXO 5 Series Oscilloscope

Data without tolerance limits is not binding | Subject to change

© 2023 - 2025 Rohde & Schwarz | 81671 Munich, Germany