

R&S® ESSENTIALS

MXO 5C Series OSCILLOSCOPE/DIGITIZER

Superior time and frequency measurements.
Compact for rackmount and bench applications.



Ihr Ansprechpartner /
Your Partner:

dataTec AG
E-Mail: info@datatec.eu

>>> www.datatec.eu

Mess- und Prüftechnik. Die Experten.

Product Brochure
Version 08.00

ROHDE & SCHWARZ

Make ideas real



NEXT-GENERATION OSCILLOSCOPE IN A COMPACT FORM

MXO 54C: 4-channel model



Fastest acquisitions with
4.5 million waveforms/s

Highest precision of
12-bit ADC/18-bit HD resolution

MXO 58C: 8-channel model



Deep memory capture with
500 million points/channel

Highest sensitivity with
advanced digital trigger

WHY ENGINEERS LOVE ROHDE & SCHWARZ OSCILLOSCOPES

- ▶ A trusted, global high-quality company with a long-standing commitment to customers and continuous technological innovation
- ▶ The newest oscilloscope portfolio from 60 MHz to 16 GHz
- ▶ In-house ASICs developed for the most responsive oscilloscopes in the world
- ▶ Frontend technology development for pristine signal integrity
- ▶ 18-bit architecture with HD mode for the highest available resolution
- ▶ Digital triggers for the most sensitive event isolation in the world
- ▶ Superior user interface and front panel that streamlines workflows

WHY THE MXO 5C Series

Based on the same technology as MXO 5:

- ▶ **Fastest oscilloscope in the world:** 8 channels, math and spectrum measurements and minimal blind time
- ▶ **Precise digital trigger:** highly accurate with 12-bit ADC, 18 bit with HD mode
- ▶ **Deep memory:** with up to 1 million waveform segments
- ▶ **Outstanding spectrum analysis:** fastest in its class with up to four analyses simultaneously

COMPELLING TECHNOLOGY BLOCKS

EVOLVING ACCELERATED INSIGHT

MXO 5C series oscilloscopes/digitizers have cutting-edge technology for swift and precise results. Equipped with advanced custom technological and revolutionary features, the instruments provide indispensable insight into circuit behavior.



MXO-EP processing ASIC

See more of your signals, faster.

Every MXO 5C series has two MXO-EP (extreme performance) Rohde & Schwarz application-specific integrated circuits (ASIC). The MXO-EP ASIC architecture processes 400 Gbit/s for the world's fastest update rate of up to > 4.5 million acquisitions/s and a total of 18 million waveforms/s on multiple channels. See and capture more signals, faster and find rare signal anomalies quickly with the most responsive oscilloscopes in the industry.



12-bit ADC, 18-bit vertical architecture

Measure your signals accurately.


The MXO 5C series has an incredibly low-noise signal path, powered by a channel-dedicated 12-bit ADC with no sample rate limitations. The high definition mode (HD) enhances vertical resolution to a remarkable 18 bit for unwavering accuracy in every measurement. With 10 effective number of bits (ENOB), ultra-low noise and a highly sensitive frontend, the offset voltage can be driven up to ± 5 V at the highest sensitivity. Get precise results and greater versatility.



Responsive deep memory

Capture more of your signals.

MXO 5C series comes with the industry's deepest standard acquisition memory of 500 Mpoints per channel, the highest sample rate can capture up to 200 ms of power up or power down sequences on eight channels. Get even longer recordings with the 1 Gpoints memory expansion.

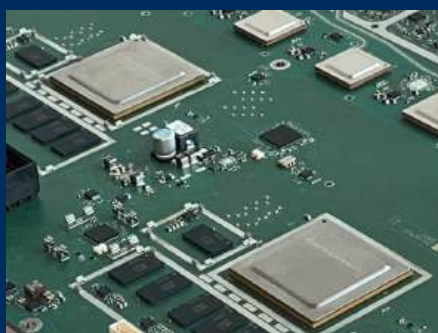

Advanced digital triggering system

Easily isolate subtle signal variations.

The MXO-EP ASIC incorporates advanced digital triggering to evaluate ADC samples in the acquisition path in real time. Trigger on small events with vertical divisions of less than 0.0001 that no other oscilloscope can isolate. Choose your own trigger hysteresis. Apply digital filters to suppress noise for the most precise triggering available. The implemented zone trigger retains ultra fast acquisition speed and versatility and can work across channel waveforms, spectra and math signals.

MXO 5C Series AT A GLANCE

FRONT

E-ink display

- ▶ Low-power display: shows key information such as IP address, firmware version and software options
- ▶ Available also when the instrument is turned off

Status LEDs

- ▶ Trigger LED indicates that the oscilloscope is triggering
- ▶ Scope Ready LED shows the oscilloscope firmware is running

USB interfaces

- ▶ Three USB 3.0 host ports



Active probe interfaces

- ▶ Support for over 30 Rohde & Schwarz current and voltage probes
- ▶ 50 Ω and 1 M Ω paths enable support of an even wider range of passive and active probes, including ones from third parties

16 logic channels

- ▶ Add 16 logic channels without reducing the number of analog channels
- ▶ High MSO sample rates for precise time synchronization between the oscilloscope and probes

BACK

Interfaces

- ▶ Two USB 3.0 host ports
- ▶ One 1 Gbit LAN
- ▶ Use HDMI V2.0 and DisplayPort++ V1.3 to connect the oscilloscope to an external display or touchscreen and enjoy the same user-friendly UI as MXO 5 series

Removable M.2 SSD card

- ▶ Data storage in a secure location
- ▶ Easily removable

On/off switch

- ▶ AC power supply connector
- ▶ Mains power switch disconnects the instrument from the AC power line



Integrated arbitrary waveform generator

- ▶ Two-channel 100 MHz arbitrary waveform generator
- ▶ Wide range of waveforms and modulation types
- ▶ Easy configuration of frequency, amplitude, offset and noise

Reference clock and trigger IN/OUT

- ▶ 10 MHz reference clock input and output connectors for superior time based accuracy
- ▶ Trigger input and trigger output

COMPACT FORM FACTOR SAVES SPACE



RACK IT

- ▶ Four or eight simultaneous channels per two height units
- ▶ 1 Gbit LAN standard
- ▶ Trigger IN/OUT and other I/O connectors
- ▶ 100 % SCPI command compatibility with MXO 5 and MXO 4 series oscilloscopes
- ▶ Scalable price points and bandwidth upgradeability
- ▶ Integrated e-ink display with key information such as instrument IP and status for fast setup
- ▶ Many digitizer functionalities with complete oscilloscope functionality



STACK IT

- ▶ Use for bench applications where vertical space is desired
 - Full HD video out
 - Optional external display (including touchscreen)
 - Add a USB mouse
- ▶ Stack an MXO 5 on top to get up to 16 channels or add an MXO 5C on top
- ▶ Place other test equipment on top, for example a laptop
- ▶ 100 % SCPI commands, waveforms and saveset file compatibility with the MXO 4 and MXO 5 series oscilloscopes

COMPACT FORM, HIGH CHANNEL DENSITY TO FIT YOUR NEEDS

Combining high performance with a compact form, the MXO 5C is an ideal oscilloscope/digitizer for high channel density applications without needing a screen.

HIGH-ENERGY PHYSICS

Do you work in particle or quantum physics or other another area that needs oscilloscope/digitizer measurements? The MXO 5C has four or eight inputs in a compact form factor with minimal audible noise and can work standalone on a bench or in a rack.


Do you need lots of channels to monitor test signals? Combine multiple MXO 5C units for a solution with superior channel density.



MANUFACTURING TESTING

The MXO 5C fast measurement speeds for production testing. Automated measurements can be made quickly and precisely. Develop your R&D tests in the lab with an MXO 5 or MXO 5C connected to an external display. Then, move the tests into the manufacturing process with a low-profile MXO 5C in a rack. The instrument also contains an integrated ARB if test signals are needed.

Use the e-ink front panel display to check the instrument status or IP address. The integrated web server offers remote access via an IP address. The remote screen is exactly the same as the one on the MXO 5.

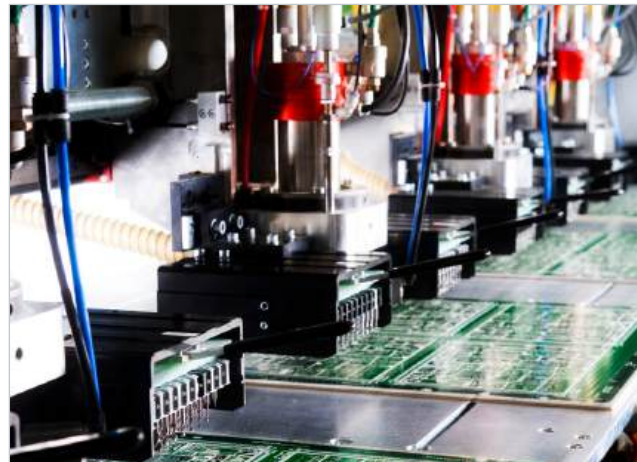

RACKMOUNT

Do you need rackmount equipment for testing? With small two height units, the MXO 5C is the better choice for rack applications than an oscilloscope with a display that may take six to eight height units.

Interact with the instrument simply over LAN with SCPI commands or via a built-in web server. If ever needed, you can always connect an external display via HDMI or DisplayPort to access the oscilloscope locally.



KEY SPECIFICATIONS

MXO 5 TECHNOLOGY

The MXO 5C is based on MXO 5 hardware, firmware and software. When connected to a web browser, the user interface is an identical to an MXO 5 front panel. The SCPI commands, savesets and waveform formats are also identical.

Key specifications



| | MXO 5 series | | MXO 5C series |
|---------------------|---|---|---------------|
| Channels | 4 | 8 | identical |
| Bandwidth | 350 MHz, 500 MHz, 1 GHz, 2 GHz | 100/200/350/500 MHz, 1 GHz, 2 GHz | identical |
| Maximum sample rate | 5 Gsample/s (on 4 channels) | 5 Gsample/s (on 4 channels); 2.5 Gsample/s (on 8 channels) | identical |
| Record length | 500 Mpoints; 1 Gpoints (optional) | | identical |
| Vertical resolution | 12-bit ADC (up to 18 bit with HD mode) | | identical |
| Acquisition rate | > 4.5 million waveforms/s (on 4 channels); 17 000 FFT/s (on 4 channels) | | identical |
| Hardware options | MSO (16 logic channels); 100 MHz generator (dual Arb) | | identical |
| Operating system | Linux | | identical |
| Web browser | intuitive user interface with MXO 5 front panel | | identical |

General data

| | MXO 5 series | MXO 5C series |
|------------------|-------------------------------|---|
| Rackmount height | 8 HU | 2 HU |
| Display | integrated 15.6" | external via DisplayPort or HDMI |
| Touch display | integrated with display | on external display that supports touch via USB |
| Front panel | standard | virtual with web browser, e-ink display for status and connectivity info |
| Passive probes | included, 1 probe per channel | optional |


INTERACTIVE USE MODELS



SEE (AND TOUCH) YOUR SIGNALS ON A BIG DISPLAY

If your work area is crowded with lots of equipment or your oscilloscope needs to be mounted in a rack, the MXO 5C is the right choice.

Want an even bigger oscilloscope display? Add any full HD compatible display for a greater display area. Just choose the size and connect via standard HDMI or DisplayPort. Add a mouse or choose a display with USB based touch capability. Or, connect locally via LAN with the integrated web browser for the virtual front panel.

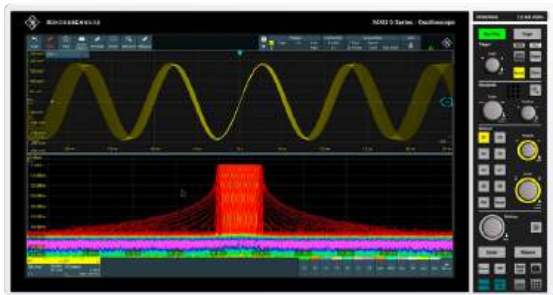

EASILY ACCESS YOUR OSCILLOSCOPE REMOTELY

Do you need access to a remote oscilloscope? Are you working from home and need to take measurements? Do you need to collaborate across geographical or company boundaries? All MXO 5C instruments incorporate a built-in web browser. Security and documentation features come standard. Even with a MXO 5C, a virtual front panel display is available with same knobs and buttons that are on the MXO 5.



INTERACT WITH YOUR OSCILLOSCOPE IN AN EASY WAY

Do you need to develop oscilloscope test applications or download waveforms and/or measurement values for analysis in other applications? All MXO 5C models come standard with a 1 Gbit LAN connection for fast and easy interaction.

ADAPTING TO YOUR WORK STYLE

SEAMLESSLY OPTIMIZED TO WORK ALONGSIDE YOU


Free up your bench

Do you need more bench space? The MXO 5C with 2 HU and only 405 mm depth, can be placed on your desk with up to 50 kg stacked on top. Alternatively, if your bench area is full, place it beneath your desk and connect it to a display for easy operation through the web browser.




Peace and quiet

Do you need a quiet space? Do loud instruments disturb others? Is equipment too loud? With an operating audible noise level of less than 30 dBA when 1 m from the instrument, the MXO 5C series sounds like a soft whisper. You might not even notice that it is turned on.

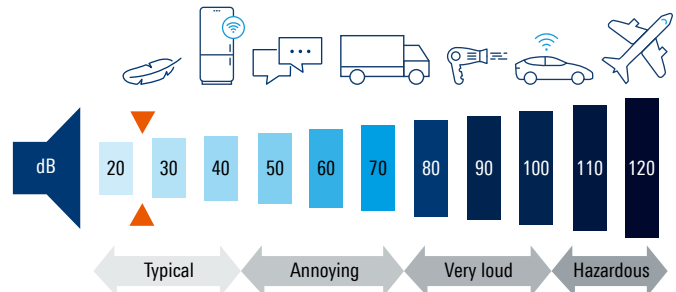

Removable M.2 memory

If security is a priority, there is no better method for protecting instrument information than physically storing it in a secure location. The MXO 5C series supports removable M.2 memory cards. When working in a secure lab, simply add M.2 drives and secure them as needed.

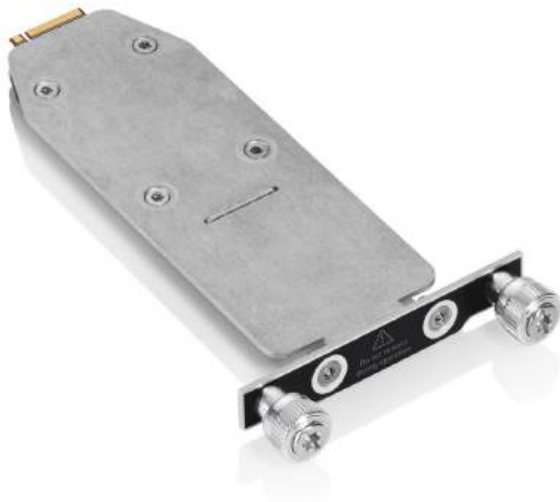


SUSTAINABLE PERFORMANCE

KEEP POWER CONSUMPTION IN CHECK

Reduce power consumption

Reducing power consumption is important both now and in the future. The electrical power used over the lifecycle of an electronic device can make up 90 % of its CO₂ footprint. Minimizing power consumption reduces environmental impact of an oscilloscope. Rising energy prices make reducing power consumption essential to long-term affordability.

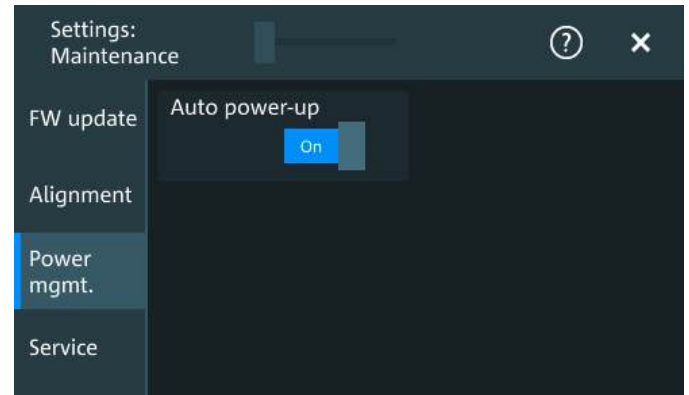

Remotely turn on/off your Rohde & Schwarz oscilloscope

When working remotely, keeping the unit powered in the lab 24/7 can waste a lot of energy. While remote IP controlled socket power supplies are possible, most electronic equipment will only power up to a standby state with the main power switched on. The MXO 5C has a convenient feature that allows it to be turned on automatically as soon as electric power is switched on. By simply connecting it into a smart socket system, you can enable the option of remotely turning on the device only when you intend to use it, while keeping it powered off at other times.




Maximum performance, minimum consumption

Compared to previous oscilloscope generations¹⁾, the MXO 5C reduces standby consumption by remarkable 40%. More impressive is that despite doubling the number of channels, exponentially increasing acquisition performance, typical power consumption remains almost unchanged²⁾.

¹⁾ Evaluations performed with the R&S®HMC8015 power analyzer.

²⁾ Compared with the R&S®RTE1024.

Standby power consumption

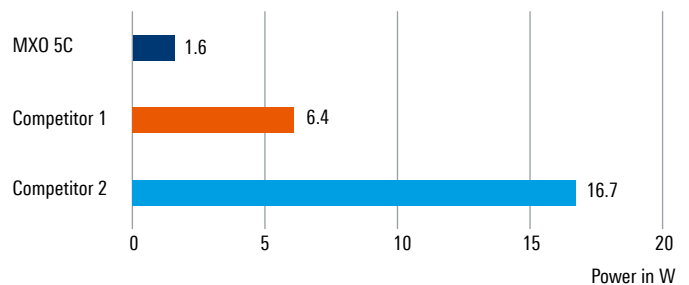


AUTOMATED COMPLIANCE TESTS

Easy configuration and automatic control with R&S®ScopeSuite+

R&S®ScopeSuite+ is a generic compliance test software that runs on a separate PC. It controls the measurement settings and test sequences on the MXO series oscilloscope and guides you through all the selected tests. Detailed, image based instructions make it easy to correctly connect oscilloscope, probes, test fixtures and DUT. User data, the test setup settings and measurement report definitions are easy to configure. The limit editor lets you individually adjust test limits.


Flexible test execution

Single tests or a sequence of tests can be repeated as often as required for debugging during development or stability verification. Limit lines and other parameters can be adjusted for each test repetition. Pre-checks on the test waveforms are performed before analysis to further reduce human error and ensure the right signals are captured.

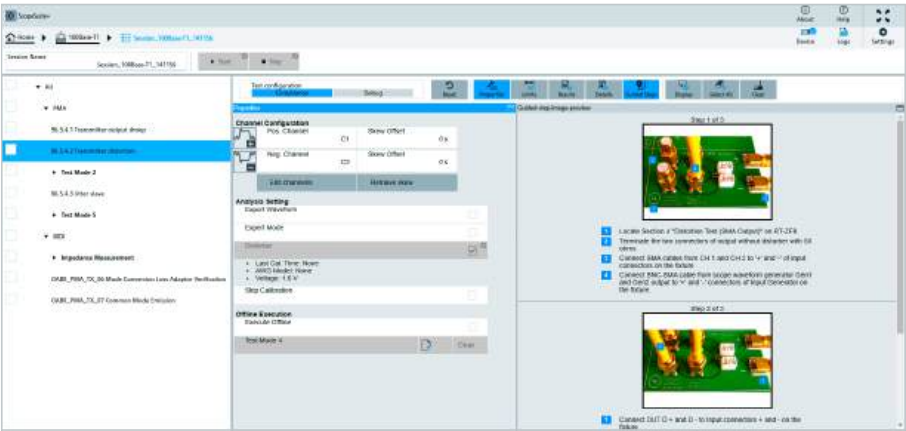

Configurable reports for result documentation


Documenting the measurement results is essential to compliance tests. R&S®ScopeSuite+ offers an extensive range of documentation functions. You can add measurement details and screenshots to the pass/fail results. The reports are available as PDFs.

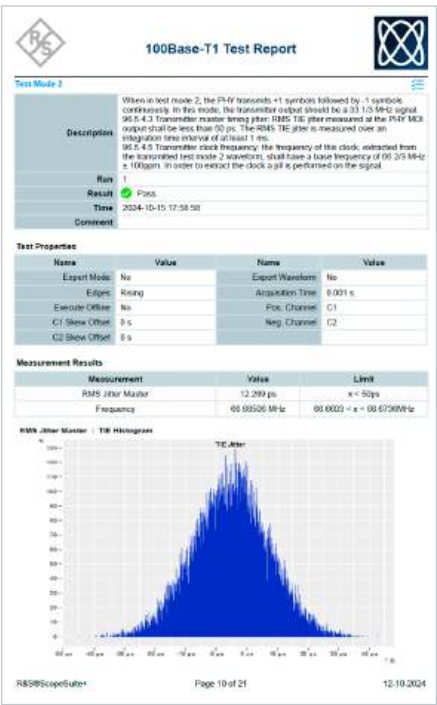

Test fixture sets from Rohde & Schwarz

Rohde & Schwarz offers test fixture sets in line with the different interface standards to connect the measuring equipment and the DUT.

| Compliance test option | Included standard |
|------------------------|--------------------------------------|
| R&S®SPLUS | base software for compliance testing |
| R&S®SPLUS-K24 | 100BASE-T1 automotive Ethernet |
| R&S®SPLUS-K89 | 10BASE-T1S automotive Ethernet |
| R&S®SPLUS-K99 | remote automation API |

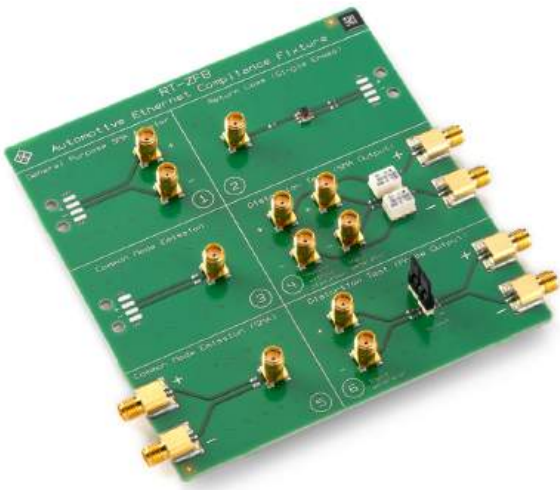

R&S®ScopeStudio SOFTWARE

Oscilloscope application software for PCs: Enhance your oscilloscope experience

An MXO series oscilloscope for your PC

Take your oscilloscope analysis to the next level with R&S®ScopeStudio software. The powerful tool lets you view, analyze, document and share measurements on a PC – when you are away from your oscilloscope. The intuitive MXO series graphical user interface helps efficiently create professional documentation with the flexible R&S®SmartGrid layout, a wide variety of built-in annotation capabilities and a customizable toolbar.

Acquire once, replay forever

Ever wish to easily access captured oscilloscope waveforms and measurement data when you were away from the instrument? Now you can. Take time for analysis, far from noisy labs and free up the oscilloscope for others. Explore the vast set of MXO series oscilloscope measurement and analysis capabilities, add documentation notes or save information to your local PC or network drive. You can do all this while still acquiring new measurements remotely, thanks to the MXO web interface.


Easy to view, analyze and measure

R&S®ScopeStudio has the same comprehensive measurement and analysis as MXO series oscilloscopes. You can apply identical measurements and analysis to captured waveforms. You can also seamlessly continue your work on a PC by loading saved sessions, instrument settings and waveforms.

Quickly share and document

Ever need to remotely collaborate within your company or with external partners, suppliers or customers? Since R&S®ScopeStudio runs on your PC, collaboration is easy with file sharing and PC tools.

Oscilloscope application software for PCs

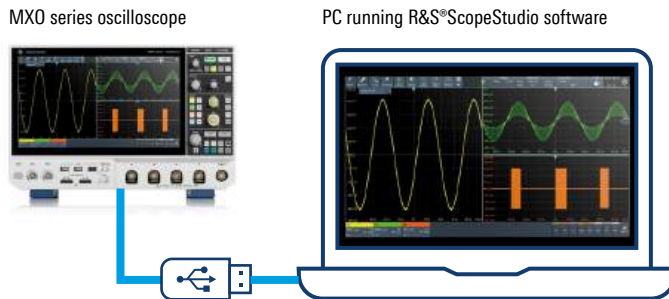

Key facts

- ▶ PC based analysis of oscilloscope waveforms
- ▶ Advanced signal processing and visualization capabilities
- ▶ Customizable R&S®SmartGrid layout for efficient analysis
- ▶ Seamless integration and compatibility with MXO series oscilloscopes

R&S®ScopeSync SOFTWARE

Are you working with an application that requires oscilloscope measurements on more than eight channels such as power conversion (three-phase voltage and current, DC link voltage and current as well as sensors), PMICs (multiphase buck converters with 16 or more phases) or FPGAs (complex power up/down sequencing with surrounding system)?




Quickly synchronize two oscilloscopes for measurements on up to 16 channels. No special equipment is needed; you only need to make three simple physical connections:

- ▶ Using a LAN cable, connect the two oscilloscopes to each other, both to a switch or both to a network
- ▶ Connect two BNC cables
 - Connect the Trig out/in signal
 - Connect both oscilloscopes to the same 10 MHz timebase clock to ensure accuracy

Your R&S®ScopeSync physical connection is now ready.

R&S®ScopeSync synchronization of two oscilloscopes

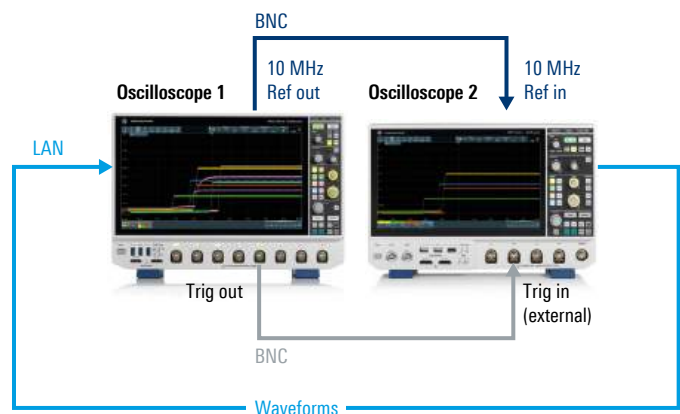

AND THERE IS SO MUCH MORE ...

AN OSCILLOSCOPE THAT EVOLVES FOR YOUR NEEDS

Grows with your needs: easy software based upgrades

The MXO 5C series adapts as your needs evolve. Simply install the necessary software licenses, bandwidth upgrades, triggering and decoding of serial protocols, memory expansions and the frequency response analysis option. The waveform generator is built-in, just activate it with a software license. The MSO logic analysis just requires activation of the logic probes. The bandwidth can be upgraded to 2 GHz with a software license for very easy retrofits.

Regular firmware updates

Regular firmware updates add new functionalities to the MXO 5C. Download the latest firmware version at www.rohde-schwarz.com. Use a USB storage device or LAN connection for installation.

Easy rackmounting

The R&S®ZZA-KN2NS rackmount kit allows easy installation of the oscilloscope in integrated environments.

THE MXO SERIES



SEE THE BIG PICTURE WITH ALL THE SMALL DETAILS

SPECIFICATIONS IN BRIEF

| Vertical system: analog channels | | |
|---|--|---|
| Input channels | | 4 channels or 8 channels |
| Input impedance | | 50 $\Omega \pm 1.5\%$, 1 M $\Omega \pm 1\%$ 12 pF (meas.) |
| Analog bandwidth (–3 dB) | 4-channel instrument | |
| | at 50 Ω input impedance | |
| | MXO 54C | ≥ 350 MHz |
| | MXO 54C with -B405 option | ≥ 500 MHz |
| | MXO 54C with -B410 option | ≥ 1 GHz |
| | MXO 54C with -B420 option | ≥ 2 GHz |
| | at 1 M Ω input impedance | |
| | MXO 54C | ≥ 350 MHz (meas.) |
| | MXO 54C with -B405 option | ≥ 500 MHz (meas.) |
| | MXO 54C with -B410 option | ≥ 700 MHz (meas.) ¹⁾ |
| | MXO 54C with -B420 option | ≥ 700 MHz (meas.) ¹⁾ |
| | 8-channel instrument | |
| | at 50 Ω input impedance | |
| | MXO 58C | ≥ 100 MHz |
| | MXO 58C with -B802 option | ≥ 200 MHz |
| | MXO 58C with -B803 option | ≥ 350 MHz |
| | MXO 58C with -B805 option | ≥ 500 MHz |
| | MXO 58C with -B810 option | ≥ 1 GHz |
| | MXO 58C with -B820 option | ≥ 2 GHz ²⁾ |
| | at 1 M Ω input impedance | |
| | MXO 58C | ≥ 100 MHz (meas.) |
| | MXO 58C with -B802 option | ≥ 200 MHz (meas.) |
| | MXO 58C with -B803 option | ≥ 350 MHz (meas.) |
| | MXO 58C with -B805 option | ≥ 500 MHz (meas.) |
| | MXO 58C with -B810 option | ≥ 700 MHz (meas.) ¹⁾ |
| | MXO 58C with -B820 option | ≥ 700 MHz (meas.) ¹⁾ |
| Additional bandwidth filters available up to instrument bandwidth | | 1 GHz, 500/350/200/100/50/20 MHz (meas.) |
| Rise/fall time (calculated) | 10% to 90% at 50 Ω | |
| | 4-channel instrument | |
| | MXO 54C | < 1.75 ns |
| | MXO 54C with -B405 option | < 700 ps |
| | MXO 54C with -B410 option | < 350 ps |
| | MXO 54C with -B420 option | < 175 ps |
| | 8-channel instrument | |
| | MXO 58C | < 3.5 ns |
| | MXO 58C with -B802 option | < 1.75 ns |
| | MXO 58C with -B803 option | < 1 ns |
| | MXO 58C with -B805 option | < 700 ps |
| | MXO 58C with -B810 option | < 350 ps |
| | MXO 58C with -B820 option | < 175 ps ²⁾ (interleaved), < 350 ps (non interleaved) |
| Vertical resolution | | 12 bit, 18 bit for high definition (HD) mode |
| Effective number of bits (meas.) | at 50 Ω , 50 mV/div, with HD mode and digital filters, 10 MHz sine signal with 80% full-scale | |
| | 10 MHz | 10.0 |
| | 20 MHz | 9.6 |
| | 100 MHz | 8.7 |
| | 200 MHz | 8.3 |
| | 300 MHz | 8.0 |
| | 500 MHz | 7.7 |
| | 1 GHz | 7.0 |

¹⁾ With R&S®RT-ZP11 passive probe.

²⁾ 2 GHz analog bandwidth in interleave mode with 5 Gsample/s real-time sampling rate.

Vertical system: analog channels

| | | |
|--|--|--|
| Input sensitivity | at 50 Ω | 0.5 mV/div to 3 V/div, entire analog bandwidth supported for all input sensitivities |
| | at 1 MΩ | 0.5 mV/div to 10 V/div, entire analog bandwidth supported for all input sensitivities |
| DC gain accuracy | offset and position set to 0 V, after self-alignment | |
| | input sensitivity | |
| | > 5 mV/div | ±1 % full scale |
| | ≤ 5 mV/div to ≥ 1 mV/div | ±1.5 % full scale |
| | 500 μV/div | ±2.5 % full scale |
| Input coupling | at 50 Ω | DC |
| | at 1 MΩ | DC, AC (> 7 Hz) |
| Maximum input voltage | at 50 Ω | 5 V (RMS), 30 V (V _p) |
| | at 1 MΩ | 300 V (RMS), 400 V (V _p), derates at 20 dB/decade to 5 V (RMS) above 250 kHz |
| | at 1 MΩ with R&S®RT-ZP11 passive probe | 400 V (RMS), 1650 V (V _p), 300 V (RMS) CAT II; for derating and details, see R&S®RT-Zxx Standard Probes specifications (PD 3607.3851.22) |
| Position range | | ±5 div |
| Offset range at 50 Ω | input sensitivity | |
| | 120 mV/div to 3 V/div | ±(15 V – input sensitivity × position) |
| | 33 mV/div to < 120 mV/div | ±(7 V – input sensitivity × position) |
| | 0.5 mV/div to < 33 mV/div | ±(2 V – input sensitivity × position) |
| Offset range at 1 MΩ | input sensitivity | |
| | 800 mV/div to 10 V/div | ±200 V |
| | 80 mV/div to < 800 mV/div | ±50 V |
| | 0.5 mV/div to < 80 mV/div | ±(5 V – input sensitivity × position) |
| Offset accuracy | | ±(0.35 % × net offset + 0.5 mV + 0.1 div × input sensitivity); (net offset = offset – position × input sensitivity) |
| DC measurement accuracy | after adequate suppression of measurement noise using high definition (HD) mode or wave- form averaging or a combination of both | ±(DC gain accuracy × reading – net offset + offset accuracy) |
| Channel-to-channel isolation (each channel at same input sensitivity) | input frequency inside instrument bandwidth | > 60 dB (1:1000) |

Vertical system: analog channels

RMS noise floor³⁾

| At 50 Ω (meas.) | Input sensitivity | Analog bandwidth (–3 dB) | | | | | |
|-----------------|-------------------|--------------------------|----------|----------|----------|----------|----------|
| | | 100 MHz | 200 MHz | 350 MHz | 500 MHz | 1 GHz | 2 GHz |
| | 0.5 mV/div | 19 μV | 26 μV | 33 μV | 39 μV | 66 μV | 111 μV |
| | 1 mV/div | 24 μV | 33 μV | 42 μV | 51 μV | 85 μV | 141 μV |
| | 2 mV/div | 25 μV | 35 μV | 44 μV | 53 μV | 89 μV | 146 μV |
| | 5 mV/div | 34 μV | 46 μV | 59 μV | 71 μV | 116 μV | 182 μV |
| | 10 mV/div | 66 μV | 89 μV | 115 μV | 138 μV | 226 μV | 350 μV |
| | 20 mV/div | 134 μV | 181 μV | 233 μV | 280 μV | 461 μV | 713 μV |
| | 50 mV/div | 324 μV | 436 μV | 563 μV | 677 μV | 1.12 mV | 1.78 mV |
| | 100 mV/div | 610 μV | 815 μV | 1.05 mV | 1.26 mV | 2.08 mV | 3.25 mV |
| | 200 mV/div | 1.26 mV | 1.69 mV | 2.17 mV | 2.60 mV | 4.31 mV | 6.74 mV |
| | 500 mV/div | 4.21 mV | 5.54 mV | 6.94 mV | 8.21 mV | 12.93 mV | 18.63 mV |
| | 1 V/div | 6.88 mV | 9.20 mV | 11.71 mV | 14.02 mV | 22.57 mV | 32.89 mV |
| | 2 V/div | 11.45 mV | 15.21 mV | 19.45 mV | 23.21 mV | 37.85 mV | 54.59 mV |
| | 3 V/div | 15.77 mV | 20.78 mV | 26.54 mV | 31.71 mV | 51.80 mV | 73.68 mV |

³⁾ HD mode active for bandwidth ≤ 500 MHz.

Vertical system: analog channels

| At 1 M Ω (meas.) | Input sensitivity | Analog bandwidth (-3 dB) | | | | | |
|-------------------------|-------------------|--------------------------|-------------|-------------|-------------|-------------|--|
| | | 100 MHz | 200 MHz | 350 MHz | 500 MHz | 700 MHz | |
| | 0.5 mV/div | 35 μ V | 40 μ V | 46 μ V | 54 μ V | 85 μ V | |
| | 1 mV/div | 36 μ V | 42 μ V | 49 μ V | 57 μ V | 89 μ V | |
| | 2 mV/div | 38 μ V | 45 μ V | 54 μ V | 64 μ V | 101 μ V | |
| | 5 mV/div | 47 μ V | 58 μ V | 77 μ V | 92 μ V | 141 μ V | |
| | 10 mV/div | 68 μ V | 89 μ V | 126 μ V | 152 μ V | 229 μ V | |
| | 20 mV/div | 120 μ V | 161 μ V | 235 μ V | 285 μ V | 428 μ V | |
| | 50 mV/div | 297 μ V | 401 μ V | 592 μ V | 719 μ V | 1.08 mV | |
| | 100 mV/div | 678 μ V | 892 μ V | 1.25 mV | 1.47 mV | 2.16 mV | |
| | 200 mV/div | 1.21 mV | 1.62 mV | 2.33 mV | 2.77 mV | 4.09 mV | |
| | 500 mV/div | 2.88 mV | 3.88 mV | 5.68 mV | 6.76 mV | 10.01 mV | |
| | 1 V/div | 6.11 mV | 8.08 mV | 11.54 mV | 13.56 mV | 18.51 mV | |
| | 2 V/div | 11.42 mV | 15.20 mV | 22.04 mV | 25.98 mV | 35.39 mV | |
| | 5 V/div | 29.10 mV | 38.75 mV | 56.46 mV | 66.60 mV | 90.40 mV | |
| | 10 V/div | 44.33 mV | 58.62 mV | 85.77 mV | 101.12 mV | 137.86 mV | |

Vertical system: digital channels

| | | |
|-------------------------------|--|--|
| Input channels | | 16 logic channels (D0 to D15) |
| Arrangement of input channels | | arranged in two logic probes with 8 channels each, assignment of the logic probes to the channels (D0 to D7 and D8 to D15) is displayed on the probe |
| Input impedance | | 100 k Ω \pm 2% ~4 pF (meas.) at probe tips |
| Maximum input frequency | signal with minimum input voltage swing and hysteresis setting: normal | 400 MHz (meas.) |
| Maximum input voltage | | \pm 40 V (V_p) |
| Minimum input voltage swing | | 500 mV (V_{pp}) (meas.) |
| Threshold groups | | D0 to D3, D4 to D7, D8 to D11 and D12 to D15 |
| Threshold level | range | \pm 8 V in 25 mV steps |
| | predefined | CMOS 5.0 V, CMOS 3.3 V, CMOS 2.5 V, TTL, ECL, PECL, LVPECL |
| Threshold accuracy | threshold level between \pm 4 V | \pm (100 mV + 3% of threshold setting) |
| Comparator hysteresis | | normal, robust, maximum |

Horizontal system

| | | |
|--|--|---|
| Timebase range | | selectable between 200 ps/div and 10 000 s/div, time per div settable to any value within range |
| Deskew range (channel deskew) | between analog channels | \pm 20 ms |
| | between digital channels | \pm 100 ns |
| Reference position | | 0% to 100% of measurement display area |
| Horizontal position range (trigger offset range) | max. | +(memory depth/current sampling rate) |
| | min. | -5000 s |
| Mode | | normal |
| Channel-to-channel skew | between analog channels | < 100 ps (meas.) |
| | between digital channels | < 500 ps (meas.) |
| Timebase accuracy | after delivery/calibration, at +23°C | \pm 0.2 ppm |
| | during calibration interval | \pm 1 ppm |
| Delta time accuracy | corresponds to time error between two edges on same acquisition and channel; signal amplitude greater than five divisions, measurement threshold set to 50%, vertical gain 10 mV/div or greater; rise time lower than four sample periods; waveform acquired in real-time mode | \pm (0.20/real-time sampling rate + timebase accuracy \times reading) (peak) (meas.) |

| Acquisition system | | |
|----------------------------|---|--|
| Sampling rate | analog channels (real time) | max. 5 Gsample/s on 4 channels, max. 2.5 Gsample/s on 8 channels |
| | analog channels (interpolated) | max. 5 Tsample/s |
| | digital channels | max. 5 Gsample/s on each channel |
| Waveform acquisition rate | max. | > 4500 000 waveforms/s |
| Trigger rearm time | min. | < 21 ns |
| Memory depth ⁴⁾ | standard | |
| | analog channels only | with 8 active channels: ► max. 500 Mpoints (single capture) ► max. 250 Mpoints (run continuous) with 4 active channels: ► max. 500 Mpoints (single capture and run continuous) |
| | digital channels only (MSO) | with 16 digital channels: ► max. 500 Mpoints (single capture) with 8 digital channels: ► max. 500 Mpoints (run continuous) |
| | mix analog and digital | with 2 analog and 8 digital channels: ► max. 500 Mpoints (single capture) ► max. 250 Mpoints (run continuous) |
| | with R&S®MXO5C-B110 memory option 1 Gpoint | |
| | analog channels only | with 4 active channels: ► max. 1 Gpoint (single capture) with 2 active channels: ► max. 1 Gpoint (run continuous) |
| | digital channels only (MSO) | with 16 digital channels: ► max. 500 Mpoints (single capture) ► max. 250 Mpoints (run continuous) with 8 digital channels: ► max. 1 Gpoint (single capture) ► max. 500 Mpoints (run continuous) |
| | mix analog and digital | with 2 analog and 8 digital channels: ► max. 500 Mpoints (single capture) ► max. 250 Mpoints (run continuous) |
| Acquisition modes | sample | middle sample in decimation interval |
| | peak detect | largest and smallest sample in decimation interval |
| | average | average value of samples in decimation interval |
| | number of averaged waveforms | 2 to 16777215 |
| | envelope | envelope of acquired waveforms |
| Sampling modes | real-time mode | max. sampling rate set by digitizer |
| | interpolated time | enhancement of sampling resolution by interpolation; max. sampling rate is 5 Tsample/s |
| Interpolation modes | | linear, sin(x)/x, sample&hold |
| Fast segmentation mode | continuous recording of waveforms in acquisition memory without interruption due to visualization | |
| | max. real-time waveform acquisition rate | > 4600 000 waveforms/s |
| | min. blind time between consecutive acquisitions | < 21 ns |

| High definition mode | | |
|-------------------------|--|--|
| General description | The high definition mode increases the bit resolution of the waveform signal by using digital filtering, leading to reduced noise. Because of the digital trigger concept of the MXO 5C, signals with increased numeric resolution are used as the input for triggering. | |
| Numeric resolution | bandwidth, at 5 Gsample/s | bit resolution |
| | 1 kHz to 10 MHz | 18 bit |
| | 100 MHz | 16 bit |
| | 200 MHz | 15 bit |
| | 500 MHz | 14 bit |
| Real-time sampling rate | all models | max. 2.5 Gsample/s on 4 channels, max. 1.25 Gsample/s on 8 channels |

⁴⁾ The maximum available memory depth depends on the bit resolution of the acquired data and, therefore, on the acquisition system settings such as decimation mode, use of waveform arithmetics or high definition (HD) mode. Interleave channels of the MXO 58C are on C1 and C5, C2 and C6, C3 and C7 as well as C4 and C8. For the MXO 54C, all 4 channels run with 5 Gsample/s and maximum bandwidth.

| Trigger system | | |
|------------------------|--|--|
| Trigger sources | | analog channels (C1 to C8), digital channels (D0 to D15), external trigger input, line trigger, serial bus |
| Trigger level range | | ±5 div from center of screen |
| Trigger modes | | auto, normal, single, n single |
| Trigger sensitivity | | 0.0001 div, from DC to instrument bandwidth for all vertical scales, user adjustable |
| Trigger jitter | full-scale sine wave of frequency set to –3 dB bandwidth | < 1 ps (RMS) (meas.) |
| Coupling mode | standard | same as selected channel |
| | HF reject | cutoff frequency selectable from 1 kHz to 500 MHz |
| | LF reject | attenuates frequencies < 50 kHz |
| Trigger hysteresis | modes | auto (default setting) or manual |
| | adjustment resolution | 0.0001 div, from DC to instrument bandwidth for all vertical scales |
| Holdoff range | time | 100 ns to 10 s, fixed and random |
| Main trigger modes | | |
| Edge | triggers on specified edge (positive, negative or either) and level | |
| Glitch | triggers on glitches of positive, negative or either polarity that are shorter or longer than specified width | |
| | glitch width | 200 ps to 1000 s |
| Width | triggers on positive or negative pulse of specified width; width can be shorter, longer, inside or outside a specified range | |
| | pulse width | 200 ps to 1000 s |
| Runt | triggers on pulse of positive, negative or either polarity that crosses one threshold but fails to cross a second threshold before crossing the first one again; runt pulse width can be arbitrary, shorter, longer, inside or outside a specified range | |
| | runt pulse width | 200 ps to 1000 s |
| Window | triggers when signal enters or exits a specified voltage range; triggers also when signal stays inside or outside the voltage range for a specified period of time | |
| Timeout | triggers when signal stays high, low or unchanged for a specified period of time | |
| | timeout | 0 ps to 1000 s |
| Interval | triggers when time between two consecutive edges of same slope (positive or negative) is shorter, longer, inside or outside a specified range | |
| | interval time | 200 ps to 1000 s |
| Slew rate | triggers when the time required by a signal edge to toggle between user-defined upper and lower voltage levels is shorter, longer, inside or outside a specified range; edge slope may be positive, negative or either | |
| | toggle time | 0 ps to 1000 s |
| Setup&hold | triggers on setup time and hold time violations between clock and data present on any two input channels; monitored time interval may be specified by the user in the range from –100 s to 100 s around a clock edge and must be at least 200 ps wide | |
| Pattern | triggers when a logical combination (and, nand, or, nor) of the input channels stays true for a period of time shorter, longer, inside or outside a specified range | |
| State | triggers when a logical combination (and, nand, or, nor) of the input channels stays true at a slope (positive, negative or either) in one selected channel | |
| Advanced trigger modes | | |
| Zone trigger | triggers on user-defined zones drawn on the display | |
| | source | acquired waveforms (input channels), math waveforms (including power analysis waveforms), spectrum waveforms, XY plots |
| | number of zones/areas | up to 4 zones with up to 8 areas each |
| | area shapes | polygons with up to 16 points |
| | area types | must intersect, must not intersect |
| | combination of zones | logical combination of zones of multiple sources using Boolean expressions |
| | trigger compatibility | requires sequence trigger A ▷ zone trigger where primary A condition can be: edge, glitch, width, runt, window, timeout, interval, slew rate, setup&hold, state, pattern |

| Trigger system | | |
|----------------------------------|---|--|
| Sequence trigger (A/B/R trigger) | triggers on B event after occurrence of A event; delay condition after A event specified as time interval; an optional R event resets the trigger sequence to A | |
| | trigger sources | analog channels (C1 to C8) |
| | A event | edge, glitch, width, runt, window, timeout, interval, slew rate |
| | B event | edge, glitch, width, runt, window, timeout, interval, slew rate |
| | R event | edge, glitch, width, runt, window, timeout, interval, slew rate |
| Serial bus trigger | optional | see dedicated triggering and decoding options |
| Trigger input | input impedance | 50 Ω (meas.) or 1 M Ω (meas.) 11 pF (meas.) |
| | max. input voltage at 50 Ω | 30 V (V_p) |
| | max. input voltage at 1 M Ω | 300 V (RMS), 400 V (V_p), derates at 20 dB/decade to 5 V (RMS) above 250 kHz |
| | trigger level | ± 5 V |
| | sensitivity | |
| | input frequency ≤ 500 MHz | 300 mV (V_{pp}) (meas.) |
| | input coupling | AC, DC (50 Ω and 1 M Ω) |
| | trigger filter | HF reject (attenuates > 50 kHz), LF reject (attenuates < 50 kHz), noise reject |
| | trigger modes | edge (positive, negative or either) |
| Trigger output | functionality | A pulse is generated for each event triggering signal acquisition. |
| | output voltage | 0 V to 5 V (nom.) at high impedance; 0 V to 2.5 V (nom.) at 50 Ω |
| | pulse width | selectable between 16 ns and 50 ms |
| | pulse polarity | low active or high active |
| | output delay | depends on trigger settings |

| Spectrum analysis | | |
|---------------------|---|--|
| General description | spectrum analysis allows up to four signal analysis in the frequency domain | |
| Spectrum | sources | channel 1 to channel 8 |
| | setup parameters | center frequency, frequency span, resolution bandwidth (automatic or manual), gate position, gate width, vertical scaling, vertical position |
| | scaling | dBm, dBV, dB μ V, V (RMS) |
| | span | 1 Hz to 1.8 GHz ⁵⁾ |
| | resolution bandwidth (RBW) | (span/4) \geq RBW \geq (span/6000) |
| | windows | flat top, Hanning, Hamming, Blackman, rectangular, Kaiser Bessel, Gaussian |
| | trace types | normal, max. hold, min. hold, average |
| | max. real-time waveform acquisition rate | > 40 000 waveforms/s |
| Gate | delimits the display region used for spectrum analysis | |
| Peak list | values in the peak list are also shown in the diagram for easy correlation | |

| RF characteristics | | |
|---------------------------|--|-------------------------|
| Sensitivity/noise density | at 1 GHz (measurement of the power spectral density at 1 GHz at input sensitivity 2 mV/div, corresponding to -30 dBm input range of the oscilloscope, using spectrum analysis with center frequency 1 GHz, span 500 kHz, RBW 3 kHz) | -160 dBm (1 Hz) (meas.) |
| Noise figure | at 1 GHz (calculated based on the noise power density above) | 14 dB (meas.) |
| Dynamic range | measured for a 1 GHz input carrier with level -3 dBm at input of oscilloscope, using spectrum analysis with center frequency 1 GHz, span 2 MHz, RBW 400 Hz at +20 MHz from center frequency | 106 dB (meas.) |

⁵⁾ The stop frequency depends on the analog bandwidth of the instrument.

| RF characteristics | | |
|---|---|-----------------|
| Absolute amplitude accuracy | 0 Hz to 1.2 GHz | ±1 dB (meas.) |
| Spurious-free dynamic range (excluding harmonics) | measured for a 250 MHz input carrier with level -3 dBm at input sensitivity 50 mV/div, using spectrum analysis with center frequency 900 MHz, span 1.8 GHz, RBW 300 kHz | 67 dBc (meas.) |
| Second harmonic distortion | measured for a 250 MHz input carrier with level -3 dBm at input sensitivity 50 mV/div, using spectrum analysis with center frequency 900 MHz, span 1.8 GHz, RBW 300 kHz | -65 dBc (meas.) |
| Third harmonic distortion | measured for a 250 MHz input carrier with level -3 dBm at input sensitivity 50 mV/div, using spectrum analysis with center frequency 900 MHz, span 1.8 GHz, RBW 300 kHz | -49 dBc (meas.) |

| Waveform measurements | | |
|------------------------|--|---|
| Automatic measurements | measurements on acquired waveforms (input channels), math waveforms, reference waveforms | amplitude, high, low, maximum, minimum, peak-to-peak, mean, RMS, sigma, positive overshoot, negative overshoot, area, rise time, fall time, positive pulse width, negative pulse width, period, frequency, positive duty cycle, negative duty cycle, delay, phase, burst width, pulse count, edge count, pulse train, positive switching, negative switching, cycle area, cycle mean, cycle RMS, cycle sigma, setup, hold, setup/hold time, setup/hold ratio, slew rate rising, slew rate falling, delay to trigger |
| | gate | delimits the display region evaluated for automatic measurements |
| | reference levels | user-configurable vertical levels define support structures for automatic measurements |
| | statistics | displays maximum, minimum, mean, standard deviation and measurement count for each automatic measurement |
| | number of active measurements | 24 |
| | result line annotation | |
| Cursor measurements | available cursors | up to four cursor sets on screen, each set with two horizontal and two vertical cursors |
| | target waveforms | acquired waveforms (input channels), math waveforms, reference waveforms, XY diagrams |
| | operating modes | vertical measurements, horizontal measurements, or both; vertical cursors either set manually or locked to waveform |

| Waveform math | | |
|------------------|-------------------------------|---|
| General features | number of math equations | up to 8 |
| | number of reference waveforms | up to 8 |
| | sources | channel 1 to 8, math waveforms 1 to 8, reference waveforms 1 to 8 |
| Functions | operators | add, subtract, multiply, divide, absolute value, square, square root, integrate, differentiate, log10, loge, log2, reciprocal, invert, lowpass, highpass, rescale ($a \cdot x + b$) |
| | filters | lowpass, highpass |
| | filter types | Gaussian, rectangular |
| | gate | delimits the display region used for waveform math |

| Digital voltmeter | | |
|------------------------|---------|---|
| Accuracy | | related to channel settings of voltmeter source |
| Measurements | | DC, DC RMS, AC RMS |
| Sources | MXO 54C | C1, C2, C3, C4 |
| | MXO 58C | C1, C2, C3, C4, C5, C6, C7, C8 |
| Number of measurements | | up to 4 |
| Resolution | | up to 6 digits |
| Bandwidth | | up to 20 MHz |

| Display characteristics | |
|---|--|
| Diagram types | Yt, XY, zoom, spectrum |
| Display configuration (waveform layout) | display area can be split into separate diagram areas by dragging and dropping signal icons, each diagram can hold any number of signals, diagrams can be stacked on top of each other and later accessed via dynamic tabs (Tab 1, etc.) |
| Signal icons | each active waveform is represented by a signal icon on the signal bar; the signal icon displays the individual vertical and acquisition settings |
| Toolbar | quick access to important tools; most common parameters can be set directly in a simple menu and gives access to more detailed parameters in the main menu; user-defined selection of tools in the toolbar |
| Upper menu bar | displays trigger, horizontal and acquisition system settings; allows quick access to these settings |
| Main menu | provides access to all instrument settings in a compact menu structure |
| Axis label | x-axis and y-axis are labeled with values and physical unit |
| Diagram label | diagrams can be individually labeled with a descriptive, user-defined name |
| Diagram layout | grid, cross hair, axis labeling and diagram labeling can be switched on and off separately |
| Persistence | 50 ms to 50 s, or infinite |
| Zoom | vertical and horizontal; touch interface simplifies resize and drag operations on zoom window |
| Signal colors (waveform coding) | predefined or user-defined color tables for persistence display |

| History and segmented memory | | | |
|---|--|--|--------------------------------|
| Acquisition memory | automatic | automatic setting of segment size and sample rate | |
| | manual | user-defined setting of segment size and sample rate | |
| Memory segmentation | function | memory segments for the acquisition | |
| | number of segments | record length | segments ⁶⁾ (up to) |
| | | 1 kpoint | 1 048 575 |
| | | 2 kpoints | 524 287 |
| | | 5 kpoints | 262 143 |
| | | 10 kpoints | 131 071 |
| | | 20 kpoints | 65 535 |
| | | 50 kpoints | 32 767 |
| | | 100 kpoints | 16 383 |
| | | 200 kpoints | 9 361 |
| | | 500 kpoints | 4 095 |
| | | 1 Mpoint | 2 113 |
| | | 2 Mpoints | 1 056 |
| | | 5 Mpoints | 427 |
| | | 10 Mpoints | 213 |
| | | 20 Mpoints | 106 |
| | | 50 Mpoints | 41 |
| | | 100 Mpoints | 20 |
| | | 200 Mpoints | 9 |
| | | 500 Mpoints | 3 |
| | | 1 Gpoint | 1 |
| Segmentation is available for all analog and logic channels, protocol decoding and spectrum analysis. | | | |
| Fast-segmented mode | continuous recording of waveforms in acquisition memory without interruption due to visualization; for blind time between consecutive acquisitions, see Acquisition system | | |

⁶⁾ With R&S®MXO5C-B110 memory option. The maximum number of segments depends on the number of active channels and the bit resolution of the acquired data and, therefore, on the acquisition system settings such as decimation mode, use of waveform arithmetics or high definition (HD) mode. The maximum number of segments without the R&S®MXO5C-B110 memory option is limited to 10 000.

History and segmented memory

| | | |
|--------------|----------------------|--|
| History mode | function | history mode is an always-on function and provides access to past acquisitions in the segmented memory |
| | timestamp resolution | 1 ns |
| | history player | replays the recorded waveforms; repetition possible; adjustable speed; manual switching to next/previous segment; numerical segment number input |
| | analyze options | overlay all segments, average all segments, envelope all segments |

Mask testing

| | | |
|-------------------------------|----------------------------------|---|
| Test definition | number of masks | up to 8 simultaneously |
| | source | acquired waveforms (input channels), math waveforms, reference waveforms, spectrum waveforms, XY plots |
| | fail condition | waveform hit |
| | test rate | up to 4 million waveforms/s |
| | action on error | acquisition stop, beep, save waveform, screenshot, pulse on trigger out |
| Mask definition with segments | number of segments per mask test | up to 8 |
| | segment definition | array of at least 3 points defines an inner region |
| Result statistics | category | total completed acquisition, failed acquisition, passed acquisition, fail rate, overall test result (pass/fail) |
| Visualization options | waveform style | vectors, dots |
| | mask colors | predefined colors for mask without violation (translucent gray), mask with violation (translucent red) |

R&S®ScopeSync

| | | |
|----------------------------------|---|--|
| Supported instruments | MXO 44, MXO 54, MXO 58, MXO 54C, MXO 58C | any combination of these instruments is supported, both as oscilloscope 1 and oscilloscope 2 |
| Maximum number of channels | oscilloscope 1: MXO 44 oscilloscope 2: MXO 44 or MXO 54 or MXO 54C | 8 with R&S®ScopeSync 16 with R&S®ScopeSync + additional GetSignals |
| | oscilloscope 1: MXO 44 oscilloscope 2: MXO 58 or MXO 58C | 12 with R&S®ScopeSync 20 with R&S®ScopeSync + additional GetSignals |
| Trigger out to trigger in jitter | across two instruments, oscilloscope 1/oscilloscope 2 | 250 ps (RMS) (meas.) |

Miscellaneous

| | | |
|----------------|--|---|
| Remote control | web interface | full operation of the instrument's touch interface, keys and multifunction wheel via web browser |
| | VNC | control of the instrument through VNC |
| | SCPI | standard instrument programming interface through VISA |
| | WebDAV | support for the web distributed authoring and versioning (WebDAV) protocol, which provides secure access through an application proxy |
| Languages | available languages for the user interface | English, German, French, Simplified Chinese, Traditional Chinese, Japanese, Russian, Spanish, Italian, Portuguese, Korean, Czech, Polish |
| | online help on the instrument | English |
| Save | destination | internal storage, USB media and remote network drive |
| | data and file management | settings: saveset, generator, screenshot waveform data and results: waveform, session, results, histogram |
| | waveform file format | Rohde & Schwarz waveform data binary (.bin) comma separated values (.csv), hierarchical data format (.h5) multi-waveforms compressed format (.zip/.csv) |
| | export mode control | display, all data, cursor, gate, manual |
| | sessions | compressed format (.zip) that can include setting on display/diagram, channel waveforms and reference waveforms |
| Recall | data and file management | settings: saveset and generator |
| | | waveform data: reference and session |

| Input and output | | |
|--|-----------------------------|--|
| Front | | |
| Channel inputs | | BNC; for details, see Vertical system |
| | probe interface | auto detection of passive probes, Rohde&Schwarz active probe interface |
| Digital channel inputs | D15 to D8, D7 to D0 | interface for R&S®RT-ZL04 logic probe |
| Probe compensation output | signal shape | rectangle, $V_{low} = 0\text{ V}$, $V_{high} = 3.3\text{ V}$ amplitude $3.3\text{ V (V}_{pp}) \pm 5\%$ (meas.) |
| | frequency | 1 kHz $\pm 1\%$ (meas.) |
| USB interfaces | | 3 \times USB 3.1 Gen 1 ports, type A plug |
| Ground jack | | connected to ground |
| Rear | | |
| Trigger input | | BNC; for details, see Trigger system |
| Trigger output | | BNC; for details, see Trigger system |
| Reference input | connector | BNC |
| | impedance | 50 Ω (nom.) |
| | input frequency | 10 MHz (± 20 ppm) |
| | sensitivity | $\geq -10\text{ dBm}$ into 50 Ω , $\leq 10\text{ dBm}$ at 10 MHz |
| Reference output | connector | BNC |
| | impedance | 50 Ω (nom.) |
| | output signal | 10 MHz (specified with timebase accuracy), 8 dBm (nom.) |
| Waveform generator outputs (requires R&S®MXO5C-B6 option) | | 2 \times BNC; for details, see R&S®MXO5C-B6 option, demo lugs and GND lug |
| USB interface | | 2 \times USB 3.1 Gen 1 port |
| LAN interface | | RJ-45 connector, supports 10/100/1000BASE-T, LXI compliant |
| External monitor interface | | HDMI 2.0 and DisplayPort++ 1.3, output of oscilloscope display |
| General data | | |
| Display | type | 2.9" e-ink display (EPD) |
| | resolution | 296 \times 128 pixel (monochrome) |
| Temperature | | |
| Temperature loading | operating temperature range | 0°C to +50°C |
| | storage temperature range | -40°C to +70°C |
| | | in line with MIL-PRF-28800F section 4.5.5.1.1.1 class 3 tailored to +45°C for operation |
| Climatic loading | | +25°C/+50°C at 85% relative humidity, noncondensing, cyclic, in line with IEC 60068-2-30 |
| Altitude | | |
| Operating | | up to 3000 m above sea level |
| Nonoperating | | up to 4600 m above sea level |
| Mechanical resistance | | |
| Vibration | sinusoidal | 5 Hz to 150 Hz, max. 1.8 g at 55 Hz; 0.5 g from 55 Hz to 150 Hz, in line with EN 60068-2-6 |
| | | 10 Hz to 55 Hz, in line with MIL-PRF-28800F, section 4.5.5.3.2 class 3 |
| | random | 8 Hz to 500 Hz, acceleration 1.2 g (RMS), in line with EN 60068-2-64 |
| | | 5 Hz to 500 Hz, acceleration 2.058 g (RMS), in line with MIL-PRF-28800F, section 4.5.5.3.1 class 3 |
| Shock | | 40 g shock spectrum, in line with MIL-STD-810G, method no. 516.6, procedure I |
| | | 30 g functional shock, halfsine, duration 11 ms, in line with MIL-PRF-28800F, section 4.5.5.4.1 |

General data

Electromagnetic compatibility (EMC)

| | | |
|-------------|--|---|
| RF emission | | in line with CISPR 11/EN55011 group 1 class A (for a shielded test setup); the instrument complies with the emission requirements stipulated by EN55011, EN61326-1 and EN61326-2-1 class A, making the instrument suitable for use in industrial environments |
|-------------|--|---|

| | | |
|----------|--|---|
| Immunity | | in line with IEC/EN61326-1 table 2, immunity test requirements for industrial environment ⁷⁾ |
|----------|--|---|

Certifications

Calibration interval

Power supply

| | | |
|-------------------|---------------------------------|--|
| AC supply | | 100 V to 240 V $\pm 10\%$ at 50 Hz to 60 Hz and 400 Hz $\pm 5\%$, max. 4 A to 2.5 A, in line with MIL-PRF-28800F, section 3.5 |
| Power consumption | standby mode | 1.6 W |
| | all channels on, without probes | 161 W (typ.) |
| | max. | 338 W |

| | | |
|--------|--|---|
| Safety | | in line with: <ul style="list-style-type: none"> ► IEC/EN61010-1, IEC/EN61010-2-030 ► CAN/CSA-C22.2 no. 61010-1 ► UL61010-1 ► CAN/CSA C22.2 no. 61010-2-030 ► UL61010-2-030 |
|--------|--|---|

Mechanical data

| | | |
|------------------------|----------------------------------|---|
| Dimensions (W × H × D) | with front handles and feet | 462 mm × 107 mm × 403 mm (18.19 in × 4.22 in × 15.87 in) |
| | without front handles and feet | 445 mm × 89 mm × 358 mm (17.52 in × 3.51 in × 14.10 in) |
| Weight | without options, nominal | 8.7 kg (19.18 lb) |
| Rackmount height | with R&S®ZZA-KN2NS rackmount kit | 2 HU |

⁷⁾ Test criterion is displayed noise level within ± 1 div for input sensitivity of 5 mV/div.

ORDERING INFORMATION

| Designation | Type | Order No. |
|--|----------------|--------------|
| MXO 5C series, base models | | |
| Oscilloscope, 350 MHz, 4 channels | MXO 54C | 1802.3000.04 |
| Oscilloscope, 100 MHz, 8 channels | MXO 58C | 1802.3000.08 |
| Base unit (including quick start guide, power cord) | | |
| Choose your bandwidth upgrade | | |
| Upgrade of MXO 54C to 500 MHz bandwidth | R&S®MXO5C-B405 | 1802.3081.02 |
| Upgrade of MXO 54C to 1 GHz bandwidth | R&S®MXO5C-B410 | 1802.3046.02 |
| Upgrade of MXO 54C to 2 GHz bandwidth | R&S®MXO5C-B420 | 1802.3069.02 |
| Upgrade of MXO 58C to 200 MHz bandwidth | R&S®MXO5C-B802 | 1802.3117.02 |
| Upgrade of MXO 58C to 350 MHz bandwidth | R&S®MXO5C-B803 | 1802.3100.02 |
| Upgrade of MXO 58C to 500 MHz bandwidth | R&S®MXO5C-B805 | 1802.3098.02 |
| Upgrade of MXO 58C to 1 GHz bandwidth | R&S®MXO5C-B810 | 1802.3052.02 |
| Upgrade of MXO 58C to 2 GHz bandwidth | R&S®MXO5C-B820 | 1802.3075.02 |
| Choose your options | | |
| Mixed signal option, for MXO 5C series with 16 digital channels | R&S®MXO5C-B1 | 1802.3023.02 |
| Arbitrary waveform generator, 100 MHz, 2 analog channels | R&S®MXO5C-B6 | 1802.3030.02 |
| Additional M.2 SSD | R&S®MXO5C-B19 | 1803.1460.02 |
| Memory option 1 Gpoint | R&S®MXO5C-B110 | 1803.1382.02 |
| Basic jitter analysis | R&S®MXO5C-K12 | 1801.8638.02 |
| Power analysis | R&S®MXO5C-K31 | 1802.3130.02 |
| Frequency response analysis | R&S®MXO5C-K36 | 1802.3146.02 |
| Bus analysis | R&S®MXO5C-K500 | 1803.1401.02 |
| Low speed serial buses (I ² C/SPI/QuadSPI/UART/RS-232/RS-422/RS-485/NRZ clocked/NRZ unclocked) | R&S®MXO5C-K510 | 1802.1418.02 |
| Automotive protocols (CAN/CAN FD/CAN XL/LIN/SENT) | R&S®MXO5C-K520 | 1802.1424.02 |
| Aerospace protocols (ARINC 429/MIL-STD-1553/SpaceWire) | R&S®MXO5C-K530 | 1803.1430.30 |
| MIPI low speed protocols (SPMI/REFE/I ³ C) | R&S®MXO5C-K550 | 1803.1447.02 |
| Automotive Ethernet protocols (10BASE-T1S/100BASE-T1) | R&S®MXO5C-K560 | 1803.1453.02 |
| Application bundle, consists of the following options: R&S®MXO5C-B6, R&S®MXO5C-K31, R&S®MXO5C-K36, R&S®MXO5C-K510, R&S®MXO5C-K520 | R&S®MXO5C-PK1 | 1803.1682.02 |
| R&S®ScopeSuite+, base option | R&S®SPLUS | 1804.8800.02 |
| R&S®ScopeSuite+, 100BASE-T1 automotive Ethernet compliance test | R&S®SPLUS-K24 | 1804.8774.02 |
| R&S®ScopeSuite+, 10BASE-T1S automotive Ethernet compliance test | R&S®SPLUS-K89 | 1804.8780.02 |
| R&S®ScopeSuite+, remote automation API | R&S®SPLUS-K99 | 1804.8945.02 |
| R&S®ScopeStudio Software | R&S®MXO-PC | 1801.9005.02 |
| R&S®ScopeStudio protocol decode option | R&S®MXO-PC-K1 | 1804.8874.02 |
| Choose your additional probes | | |
| Single-ended passive probes | | |
| 500 MHz, 10 M Ω , 10:1, 400 V, 9.5 pF, 2.5 mm | R&S®RT-ZP10 | 1409.7550.00 |
| 500 MHz, 10 M Ω , 10:1, 300 V, 10 pF, 5 mm | R&S®RT-ZP05S | 1333.2401.02 |
| 38 MHz, 1 M Ω , 1:1, 55 V, 39 pF, 2.5 mm | R&S®RT-ZP1X | 1333.1370.02 |
| Active broadband probes: single-ended | | |
| 1.0 GHz, active, 1 M Ω , Rohde & Schwarz probe interface | R&S®RT-ZS10E | 1418.7007.02 |
| 1.0 GHz, active, 1 M Ω , R&S®ProbeMeter, micro button, Rohde & Schwarz probe interface | R&S®RT-ZS10 | 1410.4080.02 |
| 1.5 GHz, active, 1 M Ω , R&S®ProbeMeter, micro button, Rohde & Schwarz probe interface | R&S®RT-ZS20 | 1410.3502.02 |
| Active broadband probes: differential | | |
| 1.0 GHz, active, differential, 1 M Ω , R&S®ProbeMeter, micro button, incl. 10:1 external attenuator, 1 M Ω , 60 V DC, 42.4 V AC (peak), Rohde & Schwarz probe interface | R&S®RT-ZD10 | 1410.4715.02 |
| 1.5 GHz, active, differential, 1 M Ω , R&S®ProbeMeter, micro button, Rohde & Schwarz probe interface | R&S®RT-ZD20 | 1410.4409.02 |

| Designation | Type | Order No. |
|--|---------------|--------------|
| Modular broadband probes | | |
| Probe amplifier module, 1.5 GHz, 10:1 or 2:1, 400 k Ω (differential mode), 200 k Ω (single-ended mode) | R&S®RT-ZM15 | 1800.4700.02 |
| Probe amplifier module, 3 GHz, 10:1 or 2:1, 400 k Ω (differential mode), 200 k Ω (single-ended mode) | R&S®RT-ZM30 | 1419.3005.02 |
| Power rail probe | | |
| 2.0 GHz, 1:1, 50 k Ω , ± 0.85 V, ± 60 V offset, Rohde&Schwarz probe interface | R&S®RT-ZPR20 | 1800.5006.02 |
| High voltage probes: passive | | |
| 250 MHz, 100:1, 100 M Ω , 850 V, 6.5 pF | R&S®RT-ZH03 | 1333.0873.02 |
| 400 MHz, 100:1, 50 M Ω , 1000 V, 7.5 pF | R&S®RT-ZH10 | 1409.7720.02 |
| 400 MHz, 1000:1, 50 M Ω , 1000 V, 7.5 pF | R&S®RT-ZH11 | 1409.7737.02 |
| High voltage probes: differential | | |
| 200 MHz, 250:1/25:1, 5 M Ω , 750 V (peak), 300 V CAT III, Rohde&Schwarz probe interface | R&S®RT-ZHD07 | 1800.2307.02 |
| 100 MHz, 500:1/50:1, 10 M Ω , 1500 V (peak), 1000 V CAT III, Rohde&Schwarz probe interface | R&S®RT-ZHD15 | 1800.2107.02 |
| 200 MHz, 500:1/50:1, 10 M Ω , 1500 V (peak), 1000 V CAT III, Rohde&Schwarz probe interface | R&S®RT-ZHD16 | 1800.2207.02 |
| 100 MHz, 1000:1/100:1, 40 M Ω , 6000 V (peak), 1000 V CAT III, Rohde&Schwarz probe interface | R&S®RT-ZHD60 | 1800.2007.02 |
| Current probes | | |
| 20 kHz, AC/DC, 0.01 V/A and 0.001 V/A, ± 200 A and ± 2000 A, BNC interface | R&S®RT-ZC02 | 1333.0850.02 |
| 100 kHz, AC/DC, 0.1 V/A, 30 A, BNC interface | R&S®RT-ZC03 | 1333.0844.02 |
| 2 MHz, AC/DC, 0.01 V/A, 500 A (RMS), Rohde&Schwarz probe interface | R&S®RT-ZC05B | 1409.8204.02 |
| 10 MHz, AC/DC, 0.01 V/A, 150 A (RMS), BNC interface | R&S®RT-ZC10 | 1409.7750K02 |
| 10 MHz, AC/DC, 0.01 V/A, 150 A (RMS), Rohde&Schwarz probe interface | R&S®RT-ZC10B | 1409.8210.02 |
| 50 MHz, AC/DC, 0.1 V/A, 30 A (RMS), Rohde&Schwarz probe interface | R&S®RT-ZC15B | 1409.8227.02 |
| 100 MHz, AC/DC, 0.1 V/A, 30 A (RMS), BNC interface | R&S®RT-ZC20 | 1409.7766K02 |
| 100 MHz, AC/DC, 0.1 V/A, 30 A (RMS), Rohde&Schwarz probe interface | R&S®RT-ZC20B | 1409.8233.02 |
| 120 MHz, AC/DC, 1 V/A, 5 A (RMS), BNC interface | R&S®RT-ZC30 | 1409.7772K02 |
| EMC near-field probe | | |
| Probe set for E and H near-field measurements, 30 MHz to 3 GHz | R&S®HZ-15 | 1147.2736.02 |
| Logic probe ¹⁾ | | |
| 400 MHz logic probe, 8 channels | R&S®RT-ZL04 | 1333.0721.02 |
| Probe accessories | | |
| Accessory set, for R&S®RT-ZP11 passive probe (2.5 mm probe tip) | R&S®RT-ZA1 | 1409.7566.00 |
| Power supply, for R&S®RT-ZC10/-ZC20/-ZC30 current probes | R&S®RT-ZA13 | 1409.7789.02 |
| External attenuator 10:1, 2.0 GHz, 1.3 pF, 60 V DC, 42.4 V AC (peak), for R&S®RT-ZD20/-ZD30 probes | R&S®RT-ZA15 | 1410.4744.02 |
| Probe pouch, for logic probes | R&S®RT-ZA19 | 1335.7875.02 |
| Power deskew and calibration test fixture | R&S®RT-ZF20 | 1800.0004.02 |
| 3D positioner with central tensioning knob for easy clamping and positioning of probes (span width: 200 mm, clamping range: 15 mm) | R&S®RT-ZAP | 1326.3641.02 |
| Bipod probe positioner | R&S®RT-ZA29 | 1801.4803.02 |
| Choose your accessory | | |
| Rackmount kit, for MXO 5C series | R&S®ZZA-KN2NS | 1703.1498.00 |

¹⁾ The R&S®MXO5C-B1 mixed signal option contains two R&S®RT-ZL04 logic probes.

Service at Rohde & Schwarz

YOU'RE IN GREAT HANDS

| | SERVICE PLANS | ON DEMAND |
|---------------------|--------------------------------|-----------------------|
| Calibration | Up to five years ¹⁾ | Pay per calibration |
| Warranty and repair | Up to five years ¹⁾ | Standard price repair |

¹⁾ For extended periods, contact your Rohde & Schwarz sales office.

Instrument management made easy

The R&S®InstrumentManager makes it easy to register and manage your instruments. It lets you schedule calibration dates and book services.

Find out more
about our service
portfolio under:



OSCILLOSCOPE PORTFOLIO



| | R&S®RTH1000 | R&S®RTC1000 | R&S®RTB 2 | R&S®RTM3000 |
|--|---|---|--|---|
| Vertical system | | | | |
| Bandwidth ¹⁾ | 60/100/200/350/500 MHz | 50/70/100/200/300 MHz | 70/100/200/300 MHz | 100/200/350/500 MHz/1 GHz |
| Number of channels | 2 plus DMM/4 | 2 | 2/4 | 2/4 |
| Vertical resolution; system architecture | 10 bit; 16 bit | 8 bit; 16 bit | 10 bit; 16 bit | 10 bit; 16 bit |
| V/div, 1 MΩ | 2 mV to 100 V | 1 mV to 10 V | 1 mV to 5 V | 500 μV to 10 V |
| V/div, 50 Ω | – | | | 500 μV to 1 V |
| Digital channels | 8 | 8 | 16 | 16 |
| Horizontal system | | | | |
| Sampling rate per channel (in Gsample/s) | 1.25 (4-channel model); 2.5 (2-channel model); 5 (all channels interleaved) | 1; 2 (2 channels interleaved) | 1.25; 2.5 (2 channels interleaved) | 2.5; 5 (2 channels interleaved) |
| Maximum memory (per channel; 1 channel active) | 125 kpoints (4-channel model); 250 kpoints (2-channel model); 500 kpoints | 1 Mpoint; 2 Mpoints | 10 Mpoints; 20 Mpoints | 40 Mpoints; 80 Mpoints |
| Segmented memory | standard, 50 Mpoints | – | standard, 160 Mpoints | option, 400 Mpoints |
| Acquisition rate (in waveforms/s) | 50 000 | 10 000 | 50 000 (300 000 in fast segmented memory mode) | 64 000 (2 000 000 in fast segmented memory mode ²⁾) |
| Trigger | | | | |
| Types | digital | analog | analog | analog |
| Sensitivity | – | – | at 1 mV/div: > 2 div | at 1 mV/div: > 2 div |
| Analysis | | | | |
| Mask test | tolerance mask | tolerance mask | tolerance mask | tolerance mask |
| Mathematics | elementary | elementary | basic (math on math) | basic (math on math) |
| Serial protocols triggering and decoding ¹⁾ | I ² C, SPI, UART/RS-232/RS-422/RS-485, CAN, LIN, CAN FD, SENT | I ² C, SPI, UART/RS-232/RS-422/RS-485, CAN, LIN | I ² C, SPI, UART/RS-232/RS-422/RS-485, CAN, LIN | I ² C, SPI, UART/RS-232/RS-422/RS-485, CAN, LIN, I ² S, MIL-STD-1553, ARINC 429 |
| Applications ^{1), 2)} | high-resolution frequency counter, advanced spectrum analysis, harmonics analysis, user scripting | digital voltmeter (DVM), component tester, fast Fourier transform (FFT) | digital voltmeter (DVM), fast Fourier transform (FFT), frequency response analysis | power, digital voltmeter (DVM), spectrum analysis and spectrogram, frequency response analysis |
| Compliance testing ^{1), 2)} | – | – | – | – |
| Display and operation | | | | |
| Size and resolution | 7" touchscreen, 800 × 480 pixel | 6.5", 640 × 480 pixel | 10.1" touchscreen, 1280 × 800 pixel | 10.1" touchscreen, 1280 × 800 pixel |
| General data | | | | |
| Dimensions in mm (W × H × D) | 201 × 293 × 74 | 285 × 175 × 140 | 390 × 220 × 152 | 390 × 220 × 152 |
| Weight in kg | 2.4 | 1.7 | 2.5 | 3.3 |
| Battery | lithium-ion, > 4 h | – | – | – |

¹⁾ Upgradeable.

²⁾ Requires an option.



| MXO 4 | MXO 5/MXO 5C | R&S®RT06 | R&S®RTP |
|---|--|--|--|
| 200/350/500 MHz/1/1.5 GHz | 100/200/350/500 MHz/1/2 GHz | 600 MHz/1/2/3/4/6 GHz | 4/6/8/13/16 GHz |
| 4 | 4/8 | 4 | 4 |
| 12 bit; 18 bit | 12 bit; 18 bit | 8 bit; 16 bit | 8 bit; 16 bit |
| 500 µV to 10 V | 500 µV to 10 V | 1 mV to 10 V (HD mode: 500 µV to 10 V) | with R&S®RT-Z1M: 2 mV to 10 V (HD mode: 1 mV to 10 V) |
| 500 µV to 1 V | 500 µV to 1 V | 1 mV to 1 V (HD mode: 500 µV to 1 V) | 2 mV to 1 V (HD mode: 1 mV to 1 V) |
| 16 | 16 | 16 | 16 |
| 2.5; 5 (2 channels interleaved) | 5 on 4 channels; 2.5 on 8 channels (2 channels interleaved) | 10; 20 (2 channels interleaved in 4 GHz and 6 GHz model) | 20; 40 (2 channels interleaved) |
| standard: 400 Mpoints; max. upgrade: 800 Mpoints ²⁾ | standard: 500 Mpoints max. upgrade: 1 Gpoint ²⁾ | standard: 200 Mpoints/800 Mpoints; max. upgrade: 1 Gpoint/2 Gpoints | standard: 100 Mpoints/400 Mpoints; max. upgrade: 3 Gpoints |
| standard: 10 000 segments; option: 1 000 000 segments | standard: 10 000 segments; option: 1 000 000 segments | standard | standard |
| > 4 500 000 | > 4 500 000 on 4 channels | 1 000 000 (2 500 000 in ultra-segmented memory mode) | 750 000 (> 3 000 000 in ultra-segmented memory mode) |
| advanced (includes zone trigger), digital trigger (15 trigger types) | advanced (includes zone trigger), digital trigger (15 trigger types) | advanced (includes zone trigger), digital trigger (15 trigger types), high speed serial pattern trigger including 5 Gbps clock data recovery (CDR) ²⁾ | advanced (includes zone trigger), digital trigger (14 trigger types) with real-time deembedding ²⁾ , high speed serial pattern trigger including 8/16 Gbps clock data recovery (CDR) ²⁾ |
| 0.0001 div, across full bandwidth, user controllable | 0.0001 div, across full bandwidth, user controllable | 0.0001 div, across full bandwidth, user controllable | 0.0001 div, across full bandwidth, user controllable |
| user configurable, hardware based advanced (formula editor) | user configurable, hardware based advanced (formula editor) | user configurable, hardware based advanced (formula editor, Python interface) | user configurable, hardware based advanced (formula editor, Python interface) |
| I ² C, SPI, UART/RS-232/RS-422/ RS-485, CAN, CAN FD, CAN XL, LIN, ARINC429, MIL-STD-1553, SPMI, 10BASE-T1S, QUAD-SPI, SENT, RFFE, I ² C, NRZ, SpaceWire | I ² C, SPI, UART/RS-232/RS-422/ RS-485, CAN, CAN FD, CAN XL, LIN, ARINC429, MIL-STD-1553, SPMI, 10BASE-T1S, 100BASE-T1, QUAD-SPI, SENT, RFFE, I ² C, NRZ, SpaceWire | I ² C, SPI, UART/RS-232/RS-422/RS-485, CAN, LIN, I ² S, MIL-STD-1553, ARINC429, FlexRay, CAN FD, MIPI RFFE, USB 2.0/HSIC, MDIO, 8b10b, Ethernet, Manchester, NRZ, SENT, MIPI D-PHY, SpaceWire, MIPI M-PHY/UniPro, CXPI, USB 3.1 Gen 1, USB-SSIC, PCIe 1.1/2.0, USB Power Delivery, Automotive Ethernet 100/1000BASE-T1 | I ² C, SPI, UART/RS-232/RS-422/RS-485, SENT, CAN, LIN, CAN FD, MIL-STD-1553, ARINC429, SpaceWire, USB 2.0/HSIC/PD, USB 3.1 Gen 1/ Gen 2/SSIC, PCIe 1.1/2.0/3.0, 8b10b, MIPI RFFE, MIPI D/M-PHY/UniPro, Automotive Ethernet 100/1000BASE-T1, Ethernet 10/100BASE-TX, MDIO, Manchester, NRZ |
| power, digital voltmeter (DVM), frequency response analysis, basic jitter analysis | power, digital voltmeter (DVM), frequency response analysis, basic jitter analysis | power, advanced spectrum analysis and spectrogram, jitter and noise decomposition, clock data recovery (CDR), I/Q data and RF analysis (R&S®VSE), deembedding, embedding, equaliza- tion, PAM-N, TDR/TDT analysis, advanced eye diagram | advanced spectrum analysis and spectrogram, jitter and noise decomposition, real-time deembedding, embedding, equalization, PAM-N, TDR/TDT analy- sis, I/Q data and RF analysis (R&S®VSE), advanced eye diagram |
| – | | see specifications (PD 5216.1640.22) | see specifications (PD 3683.5616.22) |
| 13.3" touchscreen, 1920 × 1080 pixel (Full HD) | for MXO 5 only: 15.6" touchscreen, 1920 × 1080 pixel (Full HD) | 15.6" touchscreen, 1920 × 1080 pixel (Full HD) | 13.3" touchscreen, 1920 × 1080 pixel (Full HD) |
| 414 × 279 × 162 | MXO 5: 445 × 314 × 154 MXO 5C: 445 × 105 × 405 | 450 × 315 × 204 | 441 × 285 × 316 |
| 6 | MXO 5: 9 MXO 5C: 8.7 | 10.7 | 18 |
| – | – | – | – |

Service at Rohde & Schwarz
You're in great hands

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

MAKE IDEAS REAL
and join our experts team
at Rohde & Schwarz.



dataTec

Mess- und Prüftechnik. Die Experten.

**Ihr Ansprechpartner /
Your Partner:**

dataTec AG

E-Mail: info@datatec.eu

>>> www.datatec.eu

Rohde & Schwarz

The Rohde & Schwarz technology group is among the trailblazers when it comes to paving the way for a safer and connected world with its leading solutions in test & measurement, technology systems and networks & cybersecurity. Founded more than 90 years ago, the group is a reliable partner for industry and government customers around the globe. The independent company is headquartered in Munich, Germany and has an extensive sales and service network with locations in more than 70 countries.

www.rohde-schwarz.com

Sustainable product design

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management
ISO 9001

Certified Environmental Management
ISO 14001

More certificates of Rohde & Schwarz



Rohde & Schwarz training

www.training.rohde-schwarz.com

Rohde & Schwarz customer support

www.rohde-schwarz.com/support

