
PXIe-5830

Specifications



dataTec

Mess- und Prüftechnik. Die Experten.

**Ihr Ansprechpartner /
Your Partner:**

dataTec AG
E-Mail: info@datatec.eu
datatec.eu



Authorized
Distributor

2023-02-23



Contents

PXIe-5830 Specifications 3

PXIe-5830 Specifications

These specifications apply to the PXIe-5830 Vector Signal Transceiver.

The PXIe-5830 instrument configuration comprises the following modules:

- PXIe-5820 Vector Signal Transceiver
- PXIe-3621 Vector Signal Up/Down Converter

There is no single instrument labeled "PXIe-5830."

Definitions

The terms *IF*, *IF Input*, and *IF Output* refer to the specifications applicable to the IF IN/OUT ports. *Leveled power* refers to an output power level setting that has been adjusted to meet the published amplitude accuracy specifications.

Warranted specifications describe the performance of a model under stated operating conditions and are covered by the model warranty. Warranted specifications account for measurement uncertainties, temperature drift, and aging. Warranted specifications are ensured by design or verified during production and calibration.

Characteristics describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- *Typical* specifications describe the performance met by a majority of models.
- *Typical-95* specifications describe the performance met by 95% ($\approx 2\sigma$) of models with a 95% confidence.
- *Nominal* specifications describe an attribute that is based on design, conformance testing, or supplemental testing.
- *Measured* specifications describe the measured performance of a representative model.

Specifications are *Warranted* unless otherwise noted.

Conditions

All specifications are valid under the following conditions unless otherwise noted.

- 30 minutes warm-up time
- Self-calibration is performed after the specified warm-up period has completed
- Module temperature, as reported by the onboard temperature sensor, is within ± 5 °C of the last self-calibration temperature
- Calibration cycle is maintained
- Modules are installed in an NI chassis with slot cooling capacity equal to 82 W
- The chassis fan mode is set to Auto and Cooling Profile is set to 58 W/82 W/82 W in NI Measurement & Automation Explorer (MAX)
- Empty chassis slots contain slot blockers and EMC filler panels to minimize temperature drift and reduce emissions
- Modules are connected with NI cables as shown in the *PXIe-5830 Getting Started Guide*
- RFmx, NI-RFSA, or NI-RFSG instrument driver is used
- Calibration IP is used properly during the creation of custom FPGA bitfiles
- LO Step Size is set to the default value and the LO Source is set to Onboard
- Acquisition Type is set to IQ

Warranted specifications are valid under the following condition unless otherwise noted.

- Over ambient temperature ranges of 0 °C to 45 °C

Typical and Typical-95 specifications are valid under the following condition unless otherwise noted.

- Over ambient temperature ranges of 23 °C \pm 5 °C

Typical and Measured specifications do not include measurement uncertainty and are measured immediately after a device self-calibration is performed.

Instrument Terminology

Refer to the following list for definitions of common PXIe-5830 instrument terms used

throughout this document.

Table 1. Instrument Terminology Definitions

Term	Definition
<i>IF IN/OUT Ports</i>	<p>Refers to the IF IN/OUT 0 and IF IN/OUT 1 connectors on the PXIe-3621 front panel for IF signals. These are the primary RF input/output ports for RF signals 5-12 GHz.</p> <p>These ports are named as IF ports because the hardware topography is the same as that found on the PXIe-3622.</p>
<i>LO2</i>	<p>Refers to the local oscillator internal to the PXIe-3621 that executes the up or down conversion from baseband.</p>
<i>Onboard</i>	<p>Refers to the value of the LO Source property and changes purpose depending on your instrument configuration.</p> <p>The PXIe-5830 refers to the LO2 of the PXIe-3621 module as the onboard LO.</p>
<i>Offset Mode is Automatic</i>	<p>Refers to the NI-RFSA Downconverter Frequency Offset Mode property or NI-RFSG Upconverter Frequency Offset Mode property set to Automatic.</p> <p>The PXIe-5830 contains a direct conversion architecture. Offset mode allows the instrument to operate in low IF mode, which increases the separation between the signal of interest and the residual sideband image and residual LO leakage power. However, low IF mode limits the available instantaneous bandwidth. A setting of Automatic allows the driver to enable low IF mode when the signal bandwidth is small enough to allow it.</p> <p>Automatic is the default value. NI recommends keeping offset mode set to the default value.</p>
<i>Offset Mode is Enabled</i>	<p>Refers to the NI-RFSA Downconverter Frequency Offset Mode property or NI-RFSG Upconverter Frequency Offset Mode property set to Enabled.</p>

Term	Definition
	The PXIe-5830 contains a direct conversion architecture. Offset mode allows the instrument to operate in low IF mode, which increases the separation between the signal of interest and the residual sideband image and residual LO leakage power.
<i>Offset Mode is User-Defined</i>	Refers to the NI-RFSA Downconverter Frequency Offset Mode property or NI-RFSG Upconverter Frequency Offset Mode property set to User-Defined. Offset Mode set to User-Defined allows the instrument to operate with maximum instantaneous bandwidth. By default, the offset is minimized to maximize the available instantaneous bandwidth.

Related information:

- [Refer to the PXIe-5830 section of the NI RF Vector Signal Transceivers Help for more information about instrument terminology.](#)

Frequency

IF IN/OUT 0, IF IN/OUT 1 frequency range ^[1]	5 GHz to 12 GHz
Frequency bandwidth	1 GHz within the specified frequency ranges
Tuning resolution ^[2]	4.45 μ Hz

Table 2. Default LO Step Size^{[3],[4]}

Frequency Range	Step Size, Onboard
5 GHz to 12 GHz	2 MHz

Frequency Settling Time

Table 3. PXIe-5830 Maximum Frequency Settling Time (LO2), Typical

Settling Accuracy (Relative to Final Frequency)	Settling Time (ms), Onboard
1.0×10^{-6}	0.50
0.1×10^{-6}	0.80
0.01×10^{-6}	1.00

The LO2 frequency settling time includes the frequency lock time.

Internal Frequency Reference

LO2 source (Onboard)	
Initial adjustment accuracy	$\pm 5 \times 10^{-6}$
Temperature stability	$\pm 1 \times 10^{-6}$, maximum
Aging	$\pm 1 \times 10^{-6}$ per year, maximum
Accuracy	<i>Initial adjustment accuracy</i> \pm <i>Aging</i> \pm <i>Temperature stability</i>


Spectral Purity

Table 4. IF Single Sideband Phase Noise (IF IN/OUT Ports), Typical

Frequency	Phase Noise (dBc/Hz, Single Sideband)
5 GHz to 7.1 GHz	-103
>7.1 GHz to 12 GHz	-97

Frequency	Phase Noise (dBc/Hz, Single Sideband)
Conditions: 20 kHz offset; self-calibration °C ± 5 °C ; LO2 LO Source: Onboard.	

Figure 1. Onboard Phase Noise at 5.5 GHz and 10 GHz, Measured (Spurs Not Shown)

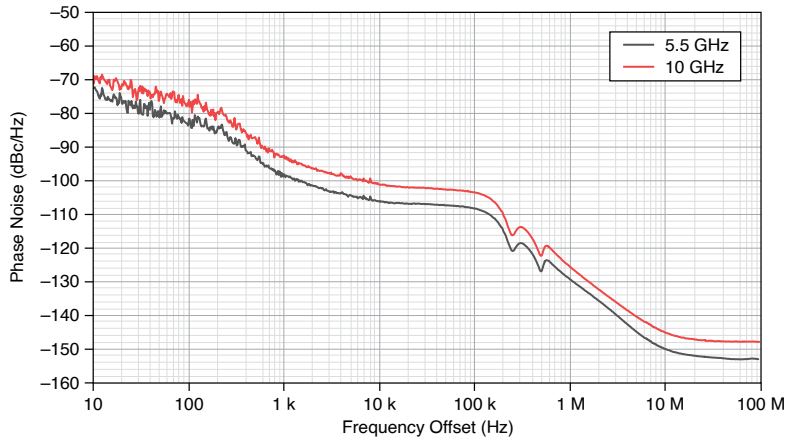

Transmit (IF IN/OUT Ports)

IF Output Amplitude Range


Table 5. IF Output Maximum Settable Power

Upconverter Center Frequency	IF IN/OUT 0 (dBm)		IF IN/OUT 1 (dBm)	
	Specification	Nominal	Specification	Nominal
5 GHz to 8 GHz	14	19	13	18
>8 GHz to 12 GHz	13	17	12	16

The power range refers to continuous wave (CW) average power. For modulated signal generation, it is important to consider the impact of peak to average power ratio (PAPR). For example, a modulated 80 MHz 802.11ax signal with a 11 dB PAPR can be generated with up to +4 dBm average modulated power when the CW average power is 15 dBm.

Output attenuator resolution	1 dB, nominal
Digital attenuation resolution ^[5]	<0.1 dB

Figure 2. IF Output Maximum CW Average Power, Measured

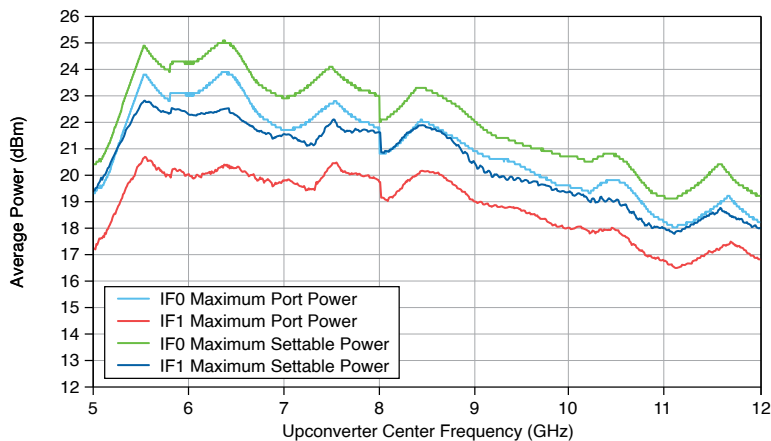

IF Output Amplitude Settling Time



Note *IF Output Amplitude Settling Time* refers to the time it takes to switch between two analog gain states with frequency unchanged once the hardware receives the amplitude change. The additional time due to software-initiated amplitude changes is not included and varies by computer. When changing frequencies, reconfiguration time is dominated by the frequency settling. Refer to [Frequency Settling Time](#) for more information

<0.5 dB of final value	27 μ s, nominal
<0.1 dB of final value	40 μ s, nominal

IF Output Amplitude Accuracy

Table 6. IF Output Absolute Amplitude Accuracy (dB) (Offset Mode is User-Defined)

Upconverter Center Frequency	23 °C ± 5 °C			0 °C to 45 °C
	Specification	Typical-95	Typical	Specification
5 GHz to 8 GHz	±1.2	±0.8	±0.5	±1.9
>8 GHz to 12 GHz	±1.4	±1.0	±0.6	±2.1

Conditions: Peak power level -30 dBm to +12 dBm; measured with a CW at 10 MHz offset from the configured upconverter center frequency; measurement performed after the PXIe-5830 has settled; Upconverter/Downconverter Frequency Offset Mode: User-Defined.

This specification is valid only when the module is operating within the specified ambient temperature range and within ± 5 °C from the last self-calibration temperature, as measured with the onboard temperature sensors.

This specification requires that temperature correction is being performed. Temperature correction is applied automatically if NIRFSG_ATTR_AUTOMATIC_THERMAL_CORRECTION is enabled (default). Temperature correction is applied if necessary only when NI-RFSG settings are adjusted. If NIRFSG_ATTR_AUTOMATIC_THERMAL_CORRECTION is disabled, the niRFSG_PerformThermalCorrection must be explicitly called.

Table 7. IF Output Relative Amplitude Accuracy (Offset Mode is User-Defined), Typical

Upconverter Center Frequency	Relative Amplitude Accuracy (dB)
5 GHz to 8 GHz	±0.25
>8 GHz to 12 GHz	±0.30

Conditions: Peak power level -30 dBm to +12 dBm; measured with a CW at 10 MHz offset from the configured upconverter center frequency; measurement performed after the PXIe-5830 has settled; Upconverter/Downconverter Frequency Offset Mode: User-Defined.

Relative accuracy describes the residual absolute accuracy error when compared to the absolute accuracy error at 0 dBm.

This specification is valid only when the module is operating within the specified ambient temperature range and within ± 5 °C from the last self-calibration temperature, as measured with

Upconverter Center Frequency	Relative Amplitude Accuracy (dB)
<p>the onboard temperature sensors.</p> <p>This specification requires that temperature correction is being performed. Temperature correction is applied automatically if NIRFSG_ATTR_AUTOMATIC_THERMAL_CORRECTION is enabled (default). Temperature correction is applied if necessary only when NI-RFSG settings are adjusted. If NIRFSG_ATTR_AUTOMATIC_THERMAL_CORRECTION is disabled, the <code>niRFSG_PerformThermalCorrection</code> must be explicitly called.</p>	

IF Output Frequency Response

Table 8. IF Output Frequency Response (dB)

Upconverter Center Frequency	23 °C ± 5 °C			0 °C to 45 °C
	Specification	Typical-95	Typical	Specification
5 GHz to 8 GHz	1.8	1.2	1.1	2.2
>8 GHz to 12 GHz	1.9	1.3	1.1	2.2

Conditions: Peak power level -30 dBm to +10 dBm; module temperature within ± 5 °C of last self-calibration temperature.

Frequency response is defined as the maximum relative amplitude deviation from the reference offset frequency. For the PXIe-5830 IF output, the reference offset frequency is 10 MHz higher than the upconverter center frequency. For the absolute amplitude accuracy at the reference offset, refer to the [IF Output Amplitude Accuracy](#) section.

Figure 3. IF Output Frequency Response, 0 dBm, Peak Output Power Level, Equalized, Measured


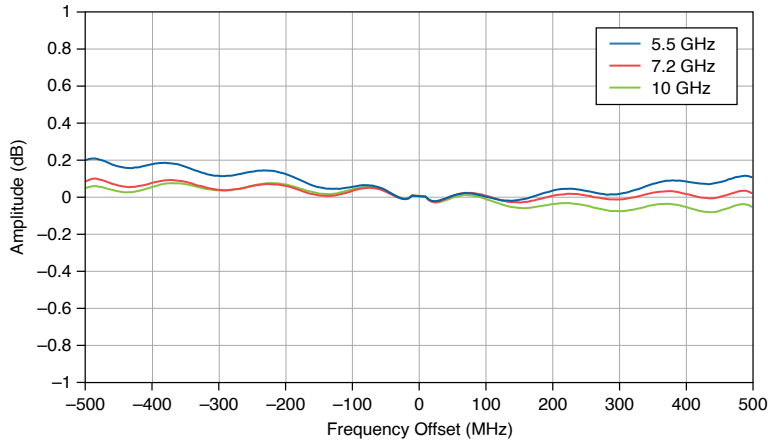


Figure 4. Maximum IF Output Frequency Response Deviation versus Upconverter Center Frequency, Measured

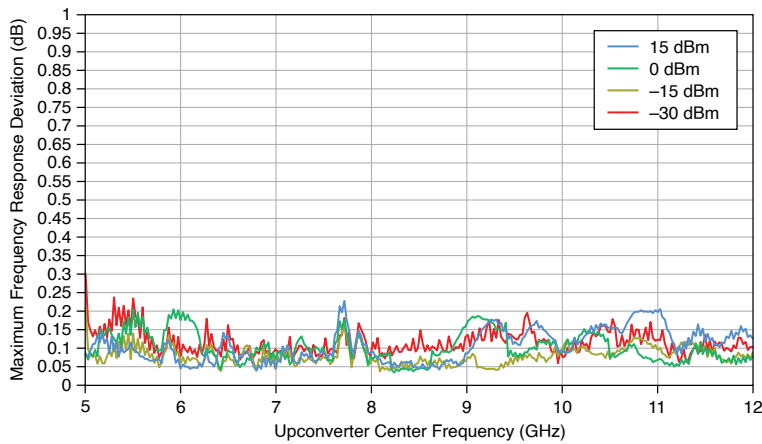

IF Output Average Noise Density

Table 9. Output Average Noise Density (dBm/Hz), Typical

Upconverter Center Frequency	Output Power Level Setting		
	-10 dBm	0 dBm	15 dBm
5 GHz to 8 GHz	-156	-149	-135
>8 GHz to 12 GHz	-154	-148	-135

Conditions: 10 averages; 40 dB baseband signal attenuation; noise measurement frequency offset by 200 MHz from the upconverter center frequency; the instrument driver is in peak mode.

Measured on the PXIe-3621 IF IN/OUT 1 port. The IF IN/OUT 0 port has a 1 dB to 5 dB degradation compared to the IF IN/OUT 1 port.

IF Output Third-Order Intermodulation

Table 10. IF Output Third-Order Intermodulation Distortion (IMD₃) (dBc), Typical

Upconverter Center Frequency	IF IN/OUT 0			IF IN/OUT 1		
	Output Power Level Setting			Output Power Level Setting		
	-30 dBm	0 dBm	15 dBm	-30 dBm	0 dBm	15 dBm
5 GHz to 8 GHz	-56	-56	-49	-45	-46	-46
>8 GHz to 12 GHz	-58	-57	-41	-53	-52	-39

Conditions: Measured by generating two -7 dBFS tones centered at +100 MHz within the instantaneous bandwidth with 10 MHz separation.

IF Output Nonharmonic Spurs

Table 11. IF Output Nonharmonic Spurs (dBc) (Default LO Step Size), Typical

Frequency	Offset \leq 500 kHz	500 kHz < Offset \leq 20 MHz	Offset > 20 MHz ^[6]
5 GHz to 8 GHz	-62	-44	<-70
>8 GHz to 12 GHz	-59	-51	<-70


Conditions: Output full scale level 0 dBm. Measured with a single tone at 0 dBFS.



Note Offset refers to \pm desired signal offset (Hz) around the current LO frequency.

Table 12. IF Output Nonharmonic Spurs (dBc) (1 MHz LO Step Size), Measured

Frequency	0 Hz \leq Offset \leq 5 MHz
5 GHz to 7.1 GHz	-64
>7.1 GHz to 12 GHz	-46

Frequency	$0 \text{ Hz} \leq \text{Offset} \leq 5 \text{ MHz}$
Conditions: Output full scale level 0 dBm.	
 Note Offset refers to \pm desired signal offset (Hz) around the current LO frequency.	

IF Output LO Residual Power


Table 13. IF Output LO Residual Power (dBc), Typical

Upconverter Center Frequency	Self-Calibration $^{\circ}\text{C} \pm 1^{\circ}\text{C}$	Self-Calibration $^{\circ}\text{C} \pm 5^{\circ}\text{C}$
5 GHz to 8 GHz	-50	-47
>8 GHz to 12 GHz	-48	-36

Conditions: Peak output power -30 dBm to +15 dBm. Input tone power at a maximum of -3 dBm. LO2 LO Source property set to Onboard.

LO Residual Power averaged across a maximum of 1 GHz bandwidth.

Figure 5. IF Output LO Residual Power, Measured

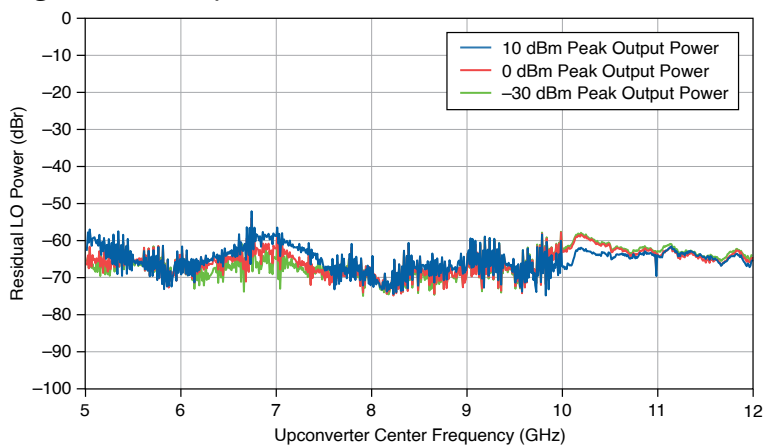

IF Output Residual Sideband Image

Table 14. IF Output Residual Sideband Image (dBc), Typical

Upconverter Center Frequency	Self-Calibration °C ± 1 °C	Self-Calibration °C ± 5 °C
5 GHz to 8 GHz	-39	-34
>8 GHz to 12 GHz	-48	-41

Conditions: Peak output power levels -30 dBm to +15 dBm. Input tone power at a maximum of -3 dBm. LO2 LO Source property set to Onboard.

This specification describes the maximum residual sideband image within the 1 GHz device instantaneous bandwidth.

Figure 6. IF Output Residual Sideband Image, 0 dBm Peak Power, Measured


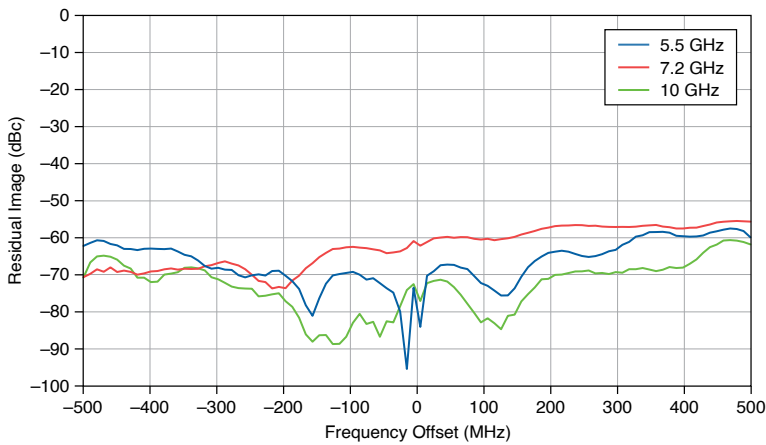


Figure 7. Maximum IF Output Residual Sideband Image Versus Upconverter Center Frequency,

Measured

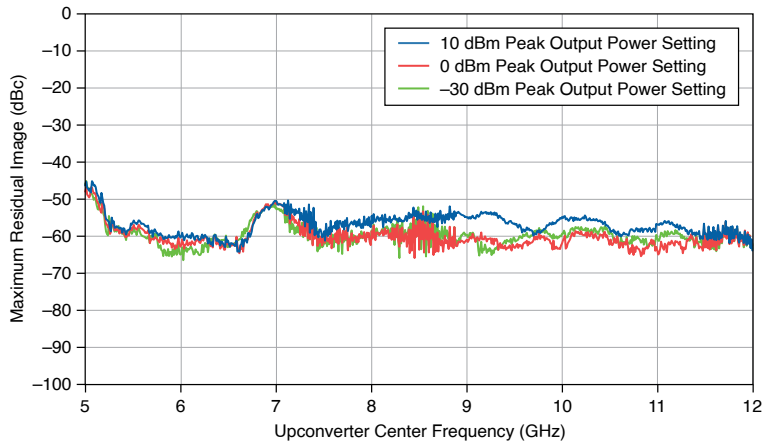

Receive (IF IN/OUT Ports)

IF Input Amplitude Range

Amplitude range	Average noise level to +20 dBm (CW RMS)
Gain resolution	1 dB, nominal

Table 15. IF Input Analog Gain Range, Nominal

Downconverter Center Frequency	IF Analog Gain Range (dB)
5 GHz to 8 GHz	≥61
>8 GHz to 12 GHz	≥57

IF Input Amplitude Settling Time



Note Settling time refers to the time it takes the amplitude to settle once the hardware receives the amplitude change. The additional time due to software initiated amplitude changes is not included and varies by computer. When changing frequencies, reconfiguration time is dominated by the frequency settling. Refer to *Frequency Settling Time* for more information.



Note Constant RF input signal, varying input reference level.

<0.5 dB of final value	27 μ s, nominal
<0.1 dB of final value	40 μ s, nominal

IF Input Amplitude Accuracy

Table 16. IF Input Absolute Amplitude Accuracy (dB) (Offset Mode is User-Defined)

Downconverter Center Frequency	23 °C \pm 5 °C			0 °C to 45 °C
	Specification	Typical-95	Typical	Specification
5 GHz to 8 GHz	\pm 1.2	\pm 0.8	\pm 0.5	\pm 1.6
>8 GHz to 12 GHz	\pm 1.4	\pm 1.0	\pm 0.7	\pm 1.6

Conditions: Reference level -30 dBm to +30 dBm; measured with a CW at 10 MHz offset from the configured downconverter center frequency when a user-defined frequency offset is not applied; measurement performed after the PXIe-5830 has settled; Upconverter/Downconverter Frequency Offset Mode: User-Defined.

This specification is valid only when the module is operating within the specified ambient temperature range and within \pm 5 °C from the last self-calibration temperature, as measured with the onboard temperature sensors.

Table 17. IF Input Relative Amplitude Accuracy (Offset Mode is User-Defined), Typical

Downconverter Center Frequency	Relative Amplitude Accuracy (dB)
5 GHz to 8 GHz	\pm 0.25
>8 GHz to 12 GHz	\pm 0.40

Conditions: Reference level -30 dBm to +30 dBm; measured with a CW at 10 MHz offset from the configured downconverter center frequency; measurement performed after the PXIe-5830 has settled; Upconverter/Downconverter Frequency Offset Mode: User-Defined.

Downconverter Center Frequency	Relative Amplitude Accuracy (dB)
Relative accuracy describes the residual absolute accuracy error when compared to the absolute accuracy error at 0 dBm.	
This specification is valid only when the module is operating within the specified ambient temperature range and within ± 5 °C from the last self-calibration temperature, as measured with the onboard temperature sensors.	

IF Input Frequency Response

Table 18. IF Input Frequency Response (dB)

Downconverter Center Frequency	23 °C \pm 5 °C			0 °C to 45 °C
	Specification	Typical-95	Typical	Specification
5 GHz to 8 GHz	2.2	1.8	1.2	2.8
>8 GHz to 12 GHz	2.3	2.0	1.1	3.2

Conditions: Input reference level -30 dBm to +20 dBm; module temperature within ± 5 °C of last self-calibration temperature.

Frequency response is defined as the maximum relative amplitude deviation from the reference offset frequency. For the PXle-5830 IF input, the reference offset frequency is 10 MHz higher than the downconverter center frequency. For the absolute amplitude accuracy at the reference offset, refer to the [IF Input Amplitude Accuracy](#) section.

Figure 8. IF Input Frequency Response, 0 dBm, Reference Level, Equalized, Measured


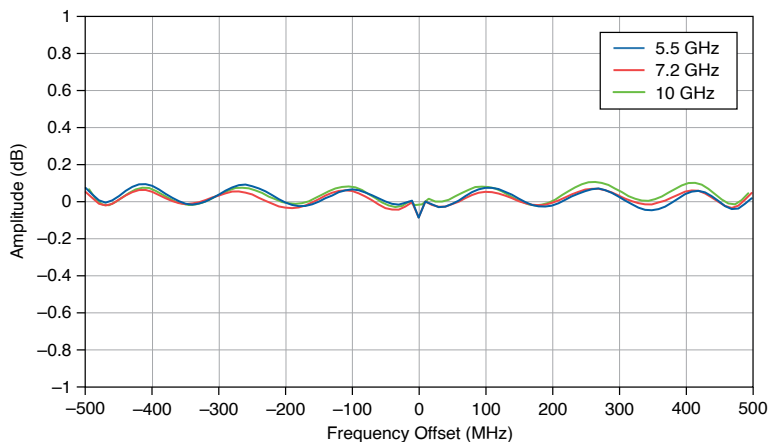


Figure 9. Maximum IF Input Frequency Response Deviation versus Downconverter Center Frequency, Measured

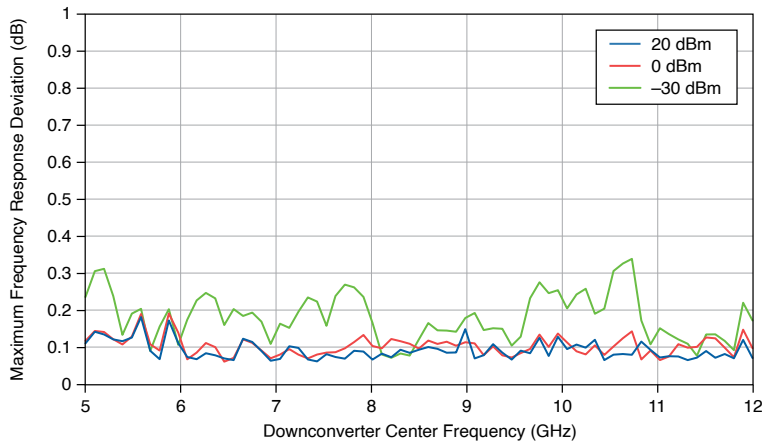

IF Input Average Noise Density

Table 19. Input Average Noise Density (dBm/Hz), Typical

Downconverter Center Frequency	-30 dBm Reference Level	0 dBm Reference Level	
		5 GHz to 8 GHz	>8 GHz to 12 GHz
5 GHz to 8 GHz	-162	-142	-142
>8 GHz to 12 GHz	-162	-142	-142

Conditions: Input terminated with a 50 Ω load; 10 averages; noise measurement frequency offset 6 MHz to output frequency.

Measured on the PXIe-3621 IF IN/OUT 1 port. The IF IN/OUT 0 port has a 2 dB degradation compared to the IF IN/OUT 1 port.

IF Input Third-Order Intermodulation

Table 20. IF Input Third-Order Intercept Point (IIP₃), Typical

Downconverter Center Frequency	Reference Level		
	-30 dBm	0 dBm	15 dBm
5 GHz to 8 GHz	-6	20	35
>8 GHz to	-4	19	33

Downconverter Center Frequency	Reference Level		
	-30 dBm	0 dBm	15 dBm
12 GHz			

Conditions: Measured by generating two -6 dBFS tones centered at +100 MHz within the instantaneous bandwidth with 10 MHz separation.

IF Input Residual Spurs

Table 21. IF Input Residual Spurs (dBm), Typical

Frequency	60 kHz ≤ Offset ≤ 60 kHz	Offset ≥ 60 MHz ^[7]
5 GHz to 8 GHz	-74	-74
>8 GHz to 12 GHz	-75	-75

Conditions : Reference level 0 dBm. Measured with the IF IN 1 port terminated with 50 Ω.



Note Offset refers to ± desired signal offset (Hz) around the current LO frequency.

IF Input LO Residual Power


Table 22. IF Input LO Residual Power (dBr^[8]), Typical

Downconverter Center Frequency	Self-Calibration °C ± 1 °C	Self-Calibration °C ± 5 °C
5 GHz to 8 GHz	-54	-44
>8 GHz to 12 GHz	-47	-38

Conditions: Reference level is -30 dBm to +15 dBm. Input tone power at a maximum of -3 dBr. LO2 LO Source property set to Onboard.

LO Residual Power averaged across a maximum of 1 GHz bandwidth.

Figure 10. IF Input LO Residual Power, Measured

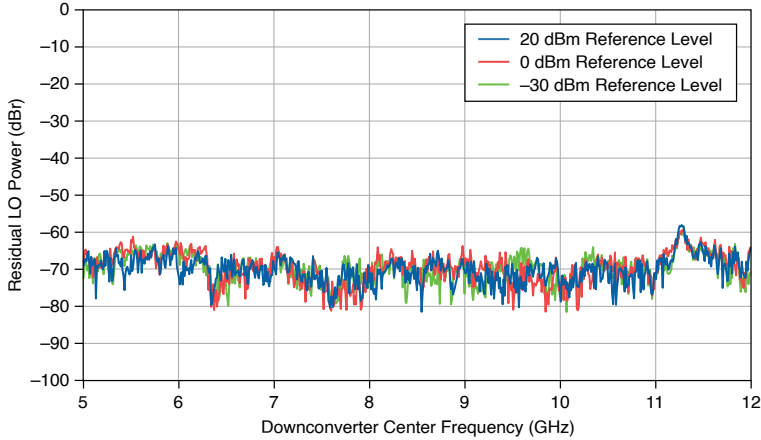

IF Input Residual Sideband Image

Table 23. IF Input Residual Sideband Image (dBc), Typical

Downconverter Center Frequency	Self-Calibration °C ± 1 °C	Self-Calibration °C ± 5 °C
5 GHz to 8 GHz	-47	-39
>8 GHz to 12 GHz	-51	-42

Conditions: Peak output power levels -30 dBm to +15 dBm. LO2 LO Source property set to Onboard.

This specification describes the maximum residual sideband image within the 1 GHz device instantaneous bandwidth.

Figure 11. IF Input Residual Sideband Image, 0 dBm, Reference Level, Measured


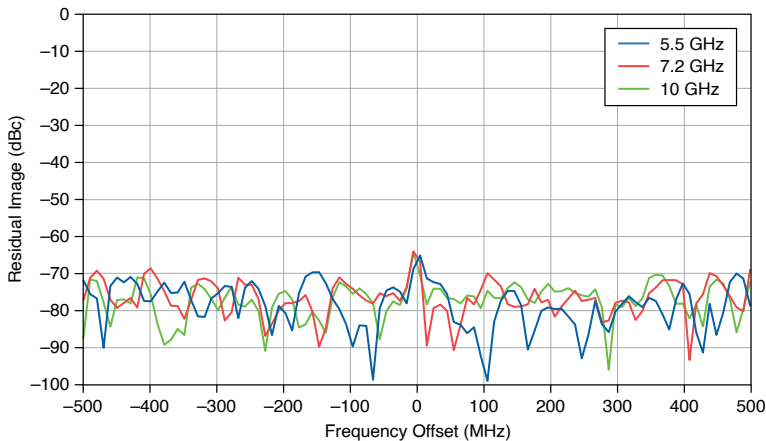


Figure 12. Maximum IF Input Residual Sideband Image Versus Downconverter Center Frequency, Measured

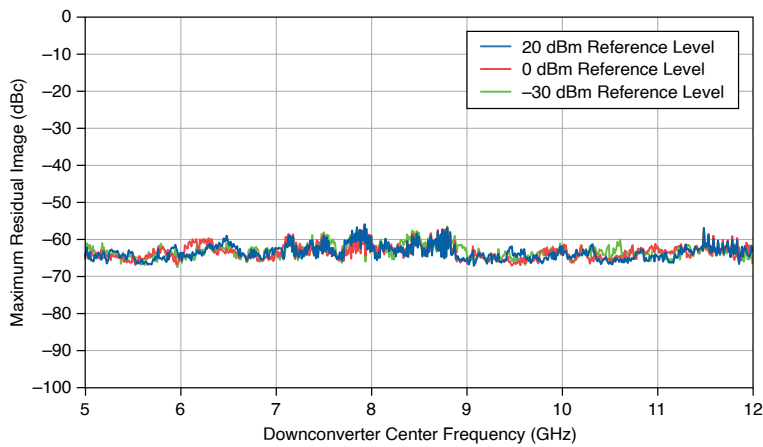

Application-Specific Modulation Quality

WLAN 802.11ax

IF IN/OUT Ports

The following measurements were taken using RFmx and corresponding RFmx default values.

Table 24. WLAN 802.11ax RMS EVM (dB), Shared Onboard LO2, Nominal^{[9][10]}

I/Q Carrier Frequency	Signal Bandwidth	
	80 MHz	160 MHz
5.1 GHz to 7.2 GHz	-50	-47

Figure 13. WLAN 802.11ax RMS EVM Versus Average Power, Measured^[11]


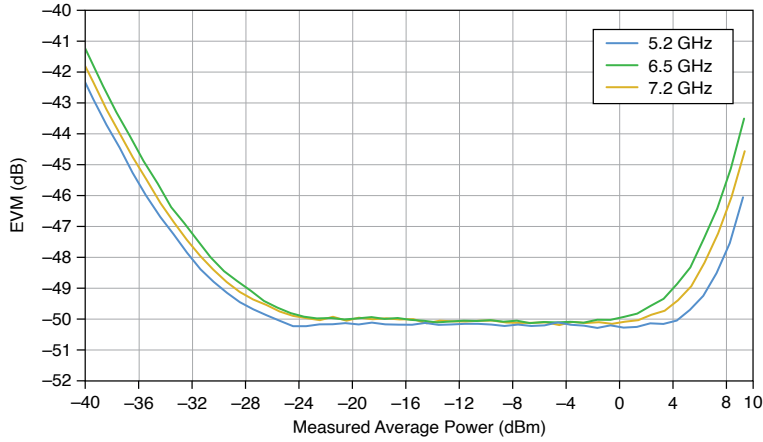


Figure 14. WLAN 802.11ax RMS EVM Versus Frequency, Nominal^{[12][13]}

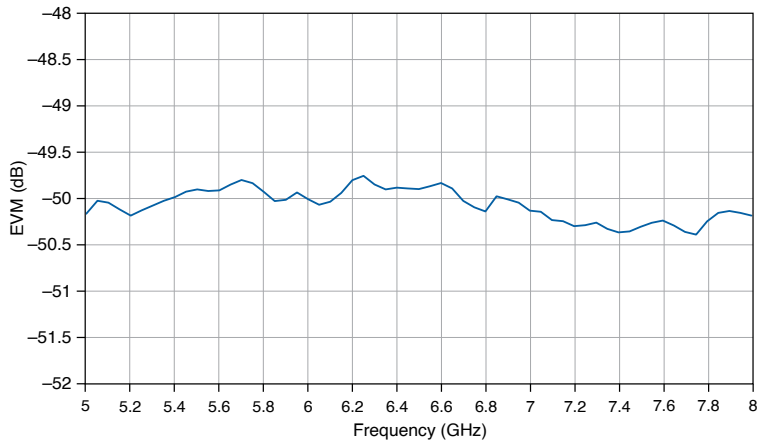

5G New Radio (NR)

IF IN/OUT Ports

Table 25. IF 5G NR EVM (dB), Shared Onboard LO2, Typical^[14]

I/Q Carrier Frequency	NR Carrier Configuration		
	1 x 100 MHz ^[15]	2 x 100 MHz ^[16]	1 x 400 MHz ^[17]
5 GHz to 8 GHz	-50	-47	-43
>8 GHz to 12 GHz	-49	-46	-43

Conditions: IF average power level is -25 dBm to 0 dBm. LO2 LO Source: SG_SA_Shared.

Table 26. IF 5G NR EVM (dB), Independent Onboard LO2, Typical^[14]

I/Q Carrier Frequency	1 x 100 MHz ^[15]	2 x 100 MHz ^[16]	1 x 400 MHz ^[17]
5 GHz to 8 GHz	-41	-41	-40
>8 GHz to 12 GHz	-39	-39	-38

Conditions: IF average power level is -25 dBm to 0 dBm. LO2 LO Source: Onboard.

Figure 15. IF 5G NR 1 CC x 100 MHz RMS EVM versus Average Power, Measured^{[14],[15]}

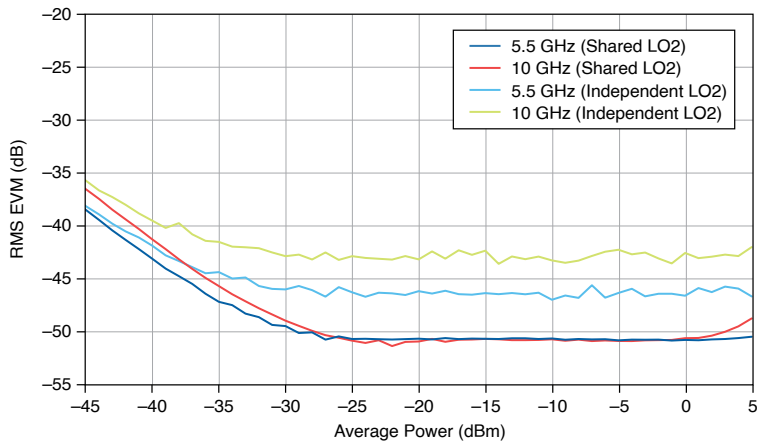


Figure 16. IF 5G NR 2 CC x 100 MHz RMS EVM versus Average Power, Measured^{[14],[16]}

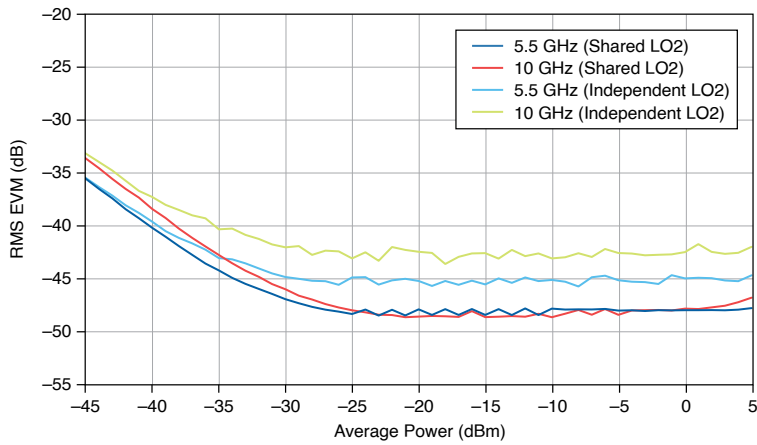


Figure 17. IF 5G NR 1 CC x 400 MHz RMS EVM versus Average Power, Measured ^{[14],[17]}

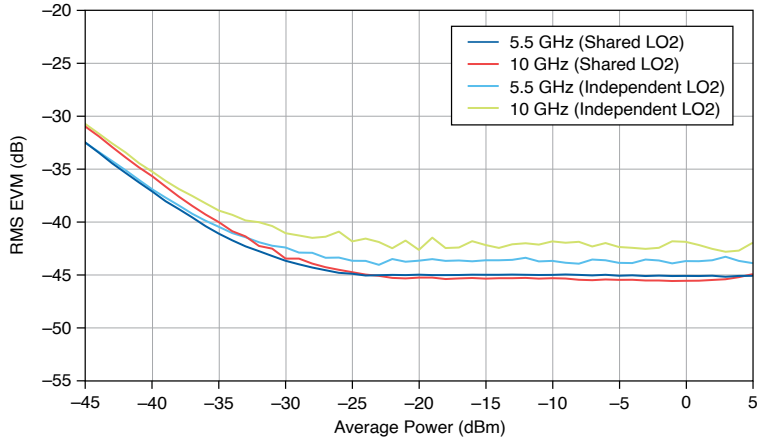


Figure 18. IF 5G NR 2 CC x 400 MHz RMS EVM versus Average Power, Measured ^{[14],[18]}

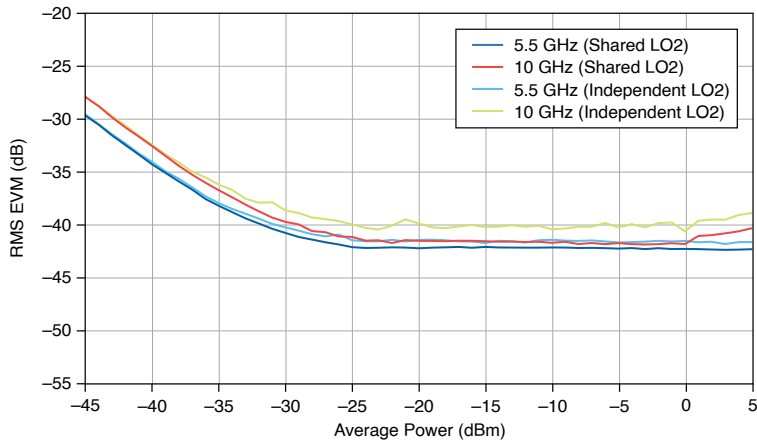


Figure 19. IF 5G NR RMS EVM versus Frequency (Shared LO2), Measured ^{[14],[19], [20]}


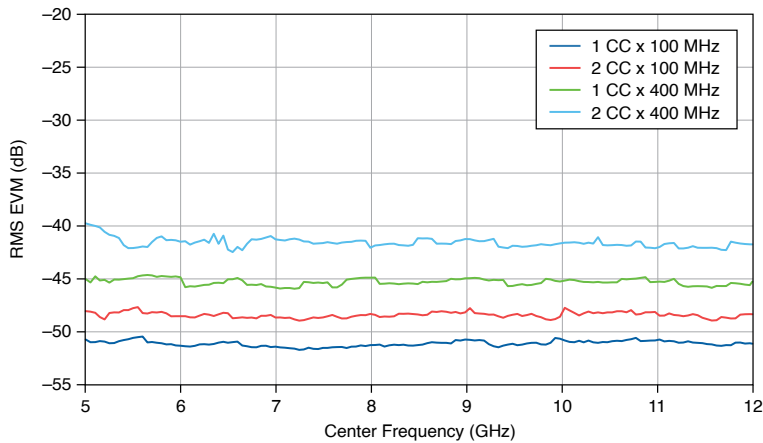


Figure 20. IF 5G NR RMS EVM versus Frequency (Independent LO2), Measured^{[14], [19], [20]}

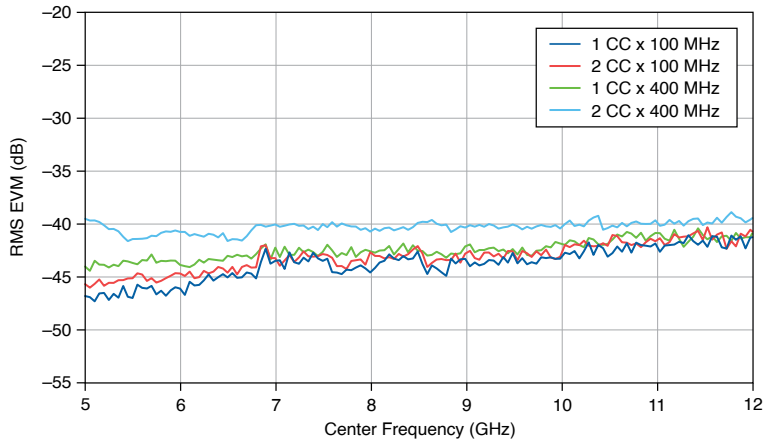

Front Panel I/O

PXle-5820



Refer to the [PXle-5820 Specifications](#) for more information about characteristics of the PXle-5820 front panel input and output.

PXle-3621

I/Q IN	
Connectors	MMPX (female)
Input coupling, per terminal	DC
Input type	Differential
Differential impedance	100 Ω
I/Q OUT	
Connectors	MMPX (female)

Output coupling, per terminal	DC
Output type	Differential
Number of channels	2
Impedance	100 Ω
LO2 IN	
Connectors	MMPX (female)
Frequency range	3.55 GHz to 7.1 GHz
Input power range ^[21]	+6 dBm to +10 dBm, nominal
Input return loss	10 dB, nominal
Absolute maximum input power	+10 dBm
LO2 coupling	DC coupled to ground
Impedance	50 Ω
LO2 OUT	
Connectors	MMPX (female)

Frequency range	3.55 GHz to 7.1 GHz	
Absolute maximum output power	+10 dBm	
LO2 Coupling	DC coupled to ground	
Output power resolution ^[22]	0.5 dB, nominal	
Impedance	50 Ω	
Output return loss	10 dB, nominal	
DIO		
Connector	Mini HDMI	
IF IN/OUT		
Connectors	SMA 27 GHz (female)	
Impedance	50 Ω during active mode, ∞ impedance after reboot and reset	
Coupling	AC coupled to ground	
Absolute maximum input power	+25 dBm	

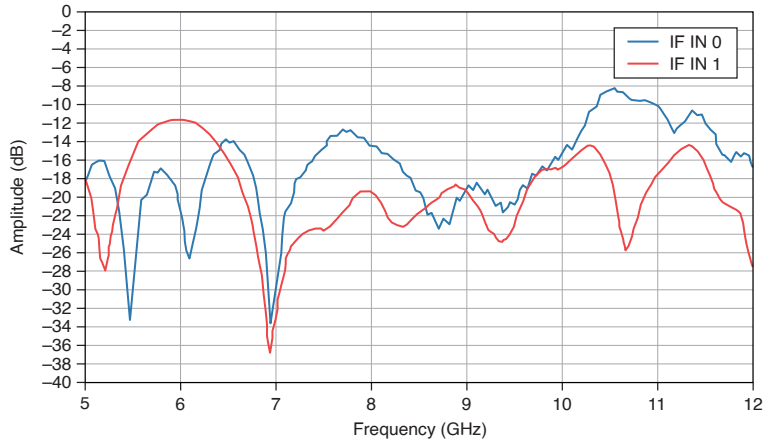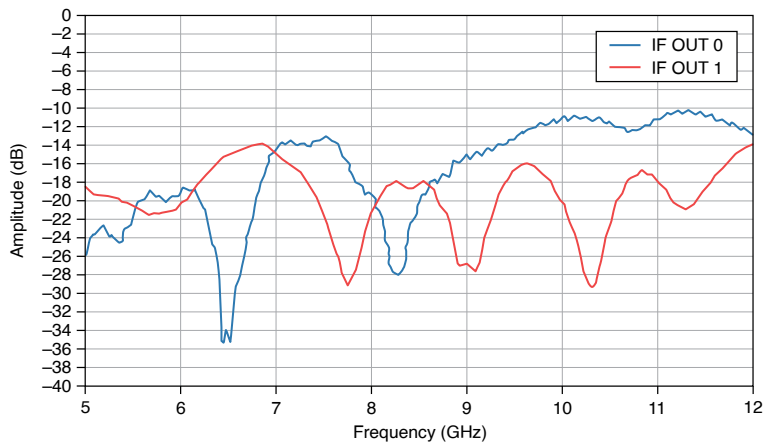Figure 21. PXle-3621 IF IN Port Return Loss, Measured**Figure 22. PXle-3621 IF OUT Port Return Loss, Measured**

REF IN/OUT	
Connectors	MMPX (female)
Frequency	10 MHz
Input tolerance ^[23]	$\pm 10 \times 10^{-6}$
Input amplitude ^[24]	0.7 V pk-pk to 3.3 V pk-pk , typical
Coupling	DC

Output amplitude	1.65 V pk-pk into 50 Ω , nominal
Impedance	50 Ω

Power Requirements

Table 27. PXIe-5830 Power Requirements, Nominal

Module	+3.3 VDC	+12 VDC	Total Power (W)
PXIe-5820	3.3 A (10.89 W)	6.0 A (72.0 W)	82.89
PXIe-3621	5.0 A (6.93 W)	5.0 A (67.2 W)	74.13
PXIe-5830 (combined instrument)	—	—	157.02

Calibration

Interval	1 year
----------	--------

Physical Characteristics

Table 28. PXIe-5830 Physical Characteristics, Nominal

Module	Dimensions	Weight	
		Grams	Ounces
PXIe-5820	3U, 2 slots	795	28.0
PXIe-3621	3U, 2 slots	1,066	37.6
PXIe-5830 (combined instrument)	3U 4 slots	1,861	65.6

Environmental Characteristics

Temperature	
Operating	0 °C to 45 °C
Storage	-41 °C to 71 °C
Humidity	
Operating	10% to 90%, noncondensing
Storage	5% to 95%, noncondensing
Pollution Degree	2
Maximum altitude	2,000 m (800 mbar) (at 25 °C ambient temperature)
Shock and Vibration	
Operating vibration	5 Hz to 500 Hz, 0.3 g RMS
Non-operating vibration	5 Hz to 500 Hz, 2.4 g RMS
Operating shock	30 g, half-sine, 11 ms pulse


Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from


our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Engineering a Healthy Planet* web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

EU and UK Customers

-  **Waste Electrical and Electronic Equipment (WEEE)**—At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit ni.com/environment/weee.

电子信息产品污染控制管理办法（中国RoHS）

-  **中国RoHS**—NI符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于NI中国RoHS合规性信息，请登录 ni.com/environment/rohs_china。(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)