



**dataTec**

Mess- und Prüftechnik. Die Experten.

Ihr Ansprechpartner /  
Your Partner:

**dataTec AG**

E-Mail: [info@datatec.eu](mailto:info@datatec.eu)

[>>> www.datatec.eu](http://www.datatec.eu)



**Elektro-Automatik**



## DATASHEET

# EA-PSBE 10000 3U

Programmable Bidirectional  
DC Power Supply

# EA-PSBE 10000 3U

## 5 KW - 10 KW - 15 KW

Programmable bidirectional  
DC power supply



## Features

- Wide range input: 208 V - 480 V,  $\pm 10\%$ , 3ph AC
- Active Power Factor Correction, typical 0.99
- Bidirectional power supply, 2-quadrants in source and sink
- In load operation, regenerative with energy recovery into the grid
- Very high efficiency of up to 96%
- High performance of up to 15 kW per unit
- Voltages from 0 - 10 V up to 0 - 2000 V
- Currents from 0 - 20 A up to 0 - 510 A
- Flexible power regulated DC input/output stages (autoranging)

- Regulation modes CV, CC, CP, CR with fast crossover
- Digital regulation, high resolution with 16bit ADCs and DACs, selection of voltage control speed: Normal, Fast, Slow
- Color 5" TFT display with touch control and intuitive user interface
- Galvanically isolated Share bus for parallel operation of all power classes in the 10000 series
- Master-slave bus for parallel operation of up to 64 units of all power classes in the 10000 series
- Command languages and drivers: SCPI and ModBus, LabVIEW, IVI

## Built-in interfaces

- USB
- Ethernet
- Analog
- USB Host
- Master-Slave-Bus
- Share-Bus

## Optional interfaces

- CAN
- CANopen
- RS232
- Profibus
- EtherCAT
- Profinet, with one or two ports
- Modbus, with one or two ports
- Ethernet, with one or two ports

## Software

- EA-Power Control
- EA-Battery Simulator

## Technical data

General specifications	
<b>AC input</b>	
Voltage, Phases	Range 1: 208 V, $\pm 10\%$ , 3ph AC (with DC output power derating to 3 / 6 / 9 kW) Range 2: 380 - 480 V, $\pm 10\%$ , 3ph AC
Frequency	45 - 65 Hz
Power factor	ca. 0.99
Leakage current	<5 mA
Inrush current	@400 V: ca. 40 A per phase
Oversupply category	2
<b>DC output static</b>	
Load regulation CV	$\leq 0.05\%$ FS (0 - 100% load, constant output voltage and constant temperature)
Line regulation CV	$\leq 0.01\%$ FS (208 V - 480 V AC $\pm 10\%$ input voltage, constant load and constant temperature)
Stability CV	$\leq 0.02\%$ FS (during 8 h of operation, after 30 minutes warm-up, at constant output voltage, load and temperature)
Temperature coefficient CV	$\leq 30\text{ppm}/^\circ\text{C}$ (after 30 minutes of warm-up)
Compensation (remote sense)	$\leq 5\%$ $U_{\text{Nominal}}$
Load regulation CC	$\leq 0.1\%$ FS (0 - 100% load, constant output voltage and constant temperature)
Line regulation CC	$\leq 0.01\%$ FS (208 V - 480 V AC $\pm 10\%$ input voltage, constant load and constant temperature)
Stability CC	$\leq 0.02\%$ FS (during 8 h of operation, after 30 minutes warm-up, at constant output voltage, load and temperature)
Temperature coefficient CC	$\leq 50\text{ppm}/^\circ\text{C}$ (after 30 minutes of warm-up)
Load regulation CP	$\leq 0.3\%$ FS (0 - 100% load, constant output voltage and constant temperature)
Load regulation CR	$\leq 0.3\%$ FS + 0.1% FS of current (0 - 100% load, constant output voltage and constant temperature)
<b>Protective functions</b>	
OVP	Oversupply protection, adjustable 0 - 110% $U_{\text{Nominal}}$
OCP	Overcurrent protection, adjustable 0 - 110% $I_{\text{Nominal}}$
OPP	Overpower protection, adjustable 0 - 110% $P_{\text{Nominal}}$
OT	Overtemperature protection (DC output shuts down in case of insufficient cooling)
<b>DC output dynamic</b>	
Rise time 10 - 90% CV	$\leq 20$ ms
Fall time 90 - 10% CV	$\leq 20$ ms
Rise time 10 - 90% CC	$\leq 10$ ms
Fall time 90 - 10% CC	$\leq 10$ ms
<b>Display accuracy</b>	
Voltage	$\leq 0.05\%$ FS
Current	$\leq 0.1\%$ FS
<b>Insulation</b>	
AC input to DC output	3750 Vrms (1 minute, creepage distance $> 8$ mm) *1
AC input to case (PE)	2500 Vrms
DC output to case (PE)	Depending on the model, see model tables
DC output to interfaces	1000 V DC (models up to 360 V rating), 1500 V DC (models from 500 V rating)
<b>Interfaces digital</b>	
Built-in, galvanically isolated	USB, Ethernet (100 MBit) for communication, 1x USB host for data acquisition
Optional, galvanically isolated	CAN, CANopen, RS232, ModBus TCP, Profinet, Profibus, EtherCAT, Ethernet
<b>Interface analog</b>	
Built-in, galvanically isolated	15 pole D-Sub
Signal range	0 - 10 V or 0 - 5 V (switchable)
Inputs	U, I, P, R, remote control on/off, DC output on/off, resistance mode on/off
Outputs	Monitor U and I, alarms, reference voltage, DC output status, CV/CC regulation mode
Accuracy U / I / P / R	0 - 10 V: $\leq 0.2\%$ , 0 - 5 V: $\leq 0.4\%$

\*1 Models up to 80 V DC rating have reinforced insulation while all other models from 200 V DC rating have basic insulation

General specifications	
<b>Device configuration</b>	
Parallel operation	Up to 64 units of any power class in series 10000, with Master-slave bus and Share bus
<b>Safety and EMC</b>	
Safety	EN 61010-1 IEC 61010-1 UL 61010-1 CSA C22.2 No 61010-1 BS EN 61010-1
EMC	EN 55011, class B CISPR 11, class B FCC 47 CFR Part 15B, Unintentional Radiator, class B EN 61326-1 include tests according to: - EN 61000-4-2 - EN 61000-4-3 - EN 61000-4-4 - EN 61000-4-5 - EN 61000-4-6
Safety protection class	1
Ingress Protection	IP20
<b>Environmental conditions</b>	
Operating temperature	0 - 50 °C (32 - 122 °F)
Storage temperature	-20 - 70 °C (-4 - 158 °F)
Humidity	≤80% relative humidity, non-condensing
Altitude	≤2000 m (≤6,600 ft)
Pollution degree	2
<b>Mechanical construction</b>	
Cooling	Forced air flow from front to rear (temperature controlled fans)
Dimensions (W x H x D)	Enclosure: 19" x 3U x 668 mm (26.3 in) Total: 19" x 3U x min. 777 mm (30.6 in)
Weight	5 kW unit: 18 kg (40 lb)      10 kW unit: 25.4 kg (56 lb)      15 kW unit: 32.8 kg (72 lb)

Technical specifications	PSBE 10010-170	PSBE 10060-170	PSBE 10080-170	PSBE 10200-70	PSBE 10360-40
<b>DC output</b>					
Voltage range	0 - 10 V	0 - 60 V	0 - 80 V	0 - 200 V	0 - 360 V
Ripple in CV (rms)	≤10 mV (BW 300 kHz)	≤10 mV (BW 300 kHz)	≤10 mV (BW 300 kHz)	≤40 mV (BW 300 kHz)	≤55 mV (BW 300 kHz)
Ripple in CV (pp)	≤100 mV (BW 20 MHz)	≤100 mV (BW 20 MHz)	≤100 mV (BW 20 MHz)	≤300 mV (BW 20 MHz)	≤320 mV (BW 20 MHz)
U <sub>Min</sub> for I <sub>Max</sub> (sink)	0.5 V	0.5 V	0.5 V	2 V	2 V
Current range	0 - 170 A	0 - 170 A	0 - 170 A	0 - 70 A	0 - 40 A
Power range	0 - 1700 W	0 - 5000 W (0 - 3000 W) *2	0 - 5000 W (0 - 3000 W) *2	0 - 5000 W (0 - 3000 W) *2	0 - 5000 W (0 - 3000 W) *2
Resistance range	0.016 Ω - 26 Ω	0.016 Ω - 26 Ω	0.016 Ω - 26 Ω	0.1 Ω - 160 Ω	0.3 Ω - 520 Ω
Output capacitance	7790 μF	7790 μF	7790 μF	2520 μF	393 μF
Efficiency (up to)	93.5% *1	94.5% *1	94.5% *1	94.5% *1	95.5% *1
<b>Insulation</b>					
Negative DC pole <-> PE	±600 V DC	±600 V DC	±600 V DC	±1000 V DC	±1000 V DC
Positive DC pole <-> PE	+600 V DC	+600 V DC	+600 V DC	+1000 V DC	+1000 V DC
<b>Article number</b>	30000752	30000753	30000754	30000755	30000756

\*1 At 100% power and 100% output voltage

\*2 In AC voltage depending DC power derating mode

Technical specifications	PSBE 10500-30	PSBE 10750-20				
<b>DC output</b>						
Voltage range	0 - 500 V	0 - 750 V				
Ripple in CV (rms)	≤70 mV (BW 300 kHz)	≤200 mV (BW 300 kHz)				
Ripple in CV (pp)	≤350 mV (BW 20 MHz)	≤800 mV (BW 20 MHz)				
U <sub>Min</sub> for I <sub>Max</sub> (sink)	2.2 V	2.5 V				
Current range	0 - 30 A	0 - 20 A				
Power range	0 - 5000 W (0 - 3000 W) *2	0 - 5000 W (0 - 3000 W) *2				
Resistance range	0.6 Ω - 1000 Ω	1.2 Ω - 2200 Ω				
Output capacitance	180 μF	180 μF				
Efficiency (up to)	95.5% *1	95.5% *1				
<b>Insulation</b>						
Negative DC pole <-> PE	±1500 V DC	±1500 V DC				
Positive DC pole <-> PE	+2000 V DC	+2000 V DC				
<b>Article number</b>	30000757	30000758				

\*1 At 100% power and 100% output voltage

\*2 In AC voltage depending DC power derating mode

Technical specifications	PSBE 10010-340	PSBE 10060-340	PSBE 10080-340	PSBE 10200-140	PSBE 10360-80
<b>DC output</b>					
Voltage range	0 - 10 V	0 - 60 V	0 - 80 V	0 - 200 V	0 - 360 V
Ripple in CV (rms)	$\leq 10 \text{ mV}$ (BW 300 kHz)	$\leq 10 \text{ mV}$ (BW 300 kHz)	$\leq 10 \text{ mV}$ (BW 300 kHz)	$\leq 40 \text{ mV}$ (BW 300 kHz)	$\leq 55 \text{ mV}$ (BW 300 kHz)
Ripple in CV (pp)	$\leq 100 \text{ mV}$ (BW 20 MHz)	$\leq 100 \text{ mV}$ (BW 20 MHz)	$\leq 100 \text{ mV}$ (BW 20 MHz)	$\leq 300 \text{ mV}$ (BW 20 MHz)	$\leq 320 \text{ mV}$ (BW 20 MHz)
$U_{\text{Min}}$ for $I_{\text{Max}}$ (sink)	0.5 V	0.5 V	0.5 V	2 V	2 V
Current range	0 - 340 A	0 - 340 A	0 - 340 A	0 - 140 A	0 - 80 A
Power range	0 - 3400 W	0 - 10000 W (0 - 6000 W) *2	0 - 10000 W (0 - 6000 W) *2	0 - 10000 W (0 - 6000 W) *2	0 - 10000 W (0 - 6000 W) *2
Resistance range	0.008 $\Omega$ - 13 $\Omega$	0.008 $\Omega$ - 13 $\Omega$	0.008 $\Omega$ - 13 $\Omega$	0.05 $\Omega$ - 80 $\Omega$	0.15 $\Omega$ - 260 $\Omega$
Output capacitance	15980 $\mu\text{F}$	15980 $\mu\text{F}$	15980 $\mu\text{F}$	5040 $\mu\text{F}$	786 $\mu\text{F}$
Efficiency (up to)	93.5% *1	94.5% *1	94.5% *1	94.5% *1	95.5% *1
<b>Insulation</b>					
Negative DC pole <-> PE	$\pm 600 \text{ V DC}$	$\pm 600 \text{ V DC}$	$\pm 600 \text{ V DC}$	$\pm 1000 \text{ V DC}$	$\pm 1000 \text{ V DC}$
Positive DC pole <-> PE	+600 V DC	+600 V DC	+600 V DC	+1000 V DC	+1000 V DC
<b>Article number</b>	30000759	30000760	30000761	30000762	30000763

\*1 At 100% power and 100% output voltage

\*2 In AC voltage depending DC power derating mode

Technical specifications	PSBE 10500-60	PSBE 10750-40	PSBE 11000-30	PSBE 11500-20	
<b>DC output</b>					
Voltage range	0 - 500 V	0 - 750 V	0 - 1000 V	0 - 1500 V	
Ripple in CV (rms)	$\leq 70 \text{ mV}$ (BW 300 kHz)	$\leq 200 \text{ mV}$ (BW 300 kHz)	$\leq 200 \text{ mV}$ (BW 300 kHz)	$\leq 400 \text{ mV}$ (BW 300 kHz)	
Ripple in CV (pp)	$\leq 350 \text{ mV}$ (BW 20 MHz)	$\leq 800 \text{ mV}$ (BW 20 MHz)	$\leq 1000 \text{ mV}$ (BW 20 MHz)	$\leq 2000 \text{ mV}$ (BW 20 MHz)	
$U_{\text{Min}}$ for $I_{\text{Max}}$ (sink)	2.2 V	2.5 V	4 V	5 V	
Current range	0 - 60 A	0 - 40 A	0 - 30 A	0 - 20 A	
Power range	0 - 10000 W (0 - 6000 W) *2	0 - 10000 W (0 - 6000 W) *2	0 - 10000 W (0 - 6000 W) *2	0 - 10000 W (0 - 6000 W) *2	
Resistance range	0.3 $\Omega$ - 500 $\Omega$	0.6 $\Omega$ - 1100 $\Omega$	1.2 $\Omega$ - 2000 $\Omega$	2.6 $\Omega$ - 4500 $\Omega$	
Output capacitance	360 $\mu\text{F}$	360 $\mu\text{F}$	90 $\mu\text{F}$	90 $\mu\text{F}$	
Efficiency (up to)	95.5% *1	95.5% *1	95.5% *1	95.5% *1	
<b>Insulation</b>					
Negative DC pole <-> PE	$\pm 1500 \text{ V DC}$	$\pm 1500 \text{ V DC}$	$\pm 1500 \text{ V DC}$	$\pm 1500 \text{ V DC}$	
Positive DC pole <-> PE	+2000 V DC	+2000 V DC	+2000 V DC	+2000 V DC	
<b>Article number</b>	30000764	30000765	30000766	30000767	

\*1 At 100% power and 100% output voltage

\*2 In AC voltage depending DC power derating mode

Technical specifications	PSBE 10010-510	PSBE 10060-510	PSBE 10080-510	PSBE 10200-210	PSBE 10360-120
<b>DC output</b>					
Voltage range	0 - 10 V	0 - 60 V	0 - 80 V	0 - 200 V	0 - 360 V
Ripple in CV (rms)	≤10 mV (BW 300 kHz)	≤10 mV (BW 300 kHz)	≤10 mV (BW 300 kHz)	≤40 mV (BW 300 kHz)	≤55 mV (BW 300 kHz)
Ripple in CV (pp)	≤100 mV (BW 20 MHz)	≤100 mV (BW 20 MHz)	≤100 mV (BW 20 MHz)	≤300 mV (BW 20 MHz)	≤320 mV (BW 20 MHz)
U <sub>Min</sub> for I <sub>Max</sub> (sink)	0.5 V	0.5 V	0.5 V	2 V	2 V
Current range	0 - 510 A	0 - 510 A	0 - 510 A	0 - 210 A	0 - 120 A
Power range	0 - 5100 W	0 - 15000 W (0 - 9000 W) *2	0 - 15000 W (0 - 9000 W) *2	0 - 15000 W (0 - 9000 W) *2	0 - 15000 W (0 - 9000 W) *2
Resistance range	0.006 Ω - 9 Ω	0.006 Ω - 9 Ω	0.006 Ω - 9 Ω	0.03 Ω - 50 Ω	0.1 Ω - 180 Ω
Output capacitance	23970 μF	23970 μF	23970 μF	7560 μF	1179 μF
Efficiency (up to)	93.5% *1	94.5% *1	94.5% *1	94.5% *1	95.5% *1
<b>Insulation</b>					
Negative DC pole <-> PE	±600 V DC	±600 V DC	±600 V DC	±1000 V DC	±1000 V DC
Positive DC pole <-> PE	+600 V DC	+600 V DC	+600 V DC	+1000 V DC	+1000 V DC
<b>Article number</b>	30000719	30000710	30000711	30000712	30000713

\*1 At 100% power and 100% output voltage

\*2 In AC voltage depending DC power derating mode

Technical specifications	PSBE 10500-90	PSBE 10750-60	PSBE 11000-40	PSBE 11500-30	PSBE 12000-20
<b>DC output</b>					
Voltage range	0 - 500 V	0 - 750 V	0 - 1000 V	0 - 1500 V	0 - 2000 V
Ripple in CV (rms)	≤70 mV (BW 300 kHz)	≤200 mV (BW 300 kHz)	≤300 mV (BW 300 kHz)	≤400 mV (BW 300 kHz)	≤400 mV (BW 300 kHz)
Ripple in CV (pp)	≤350 mV (BW 20 MHz)	≤800 mV (BW 20 MHz)	≤1600 mV (BW 20 MHz)	≤2400 mV (BW 20 MHz)	≤2400 mV (BW 20 MHz)
U <sub>Min</sub> for I <sub>Max</sub> (sink)	2.2 V	2.2 V	5.6 V	5.6 V	7.2 V
Current range	0 - 90 A	0 - 60 A	0 - 40 A	0 - 30 A	0 - 20 A
Power range	0 - 15000 W (0 - 9000 W) *2	0 - 15000 W (0 - 9000 W) *2	0 - 15000 W (0 - 9000 W) *2	0 - 15000 W (0 - 9000 W) *2	0 - 15000 W (0 - 9000 W) *2
Resistance range	0.2 Ω - 330 Ω	0.4 Ω - 750 Ω	0.8 Ω - 1300 Ω	1.7 Ω - 3000 Ω	3.5 Ω - 5300 Ω
Output capacitance	540 μF	540 μF	131 μF	60 μF	60 μF
Efficiency (up to)	95.5% *1	95.5% *1	95.5% *1	95.5% *1	95.5% *1
<b>Insulation</b>					
Negative DC pole <-> PE	±1500 V DC				
Positive DC pole <-> PE	+2000 V DC				
<b>Article number</b>	30000714	30000715	30000716	30000717	30000718

\*1 At 100% power and 100% output voltage

\*2 In AC voltage depending DC power derating mode

## General


The bidirectional DC laboratory power supplies in the PSBE 10000 series from EA Elektro-Automatik are two quadrant devices which can perform the function of a power supply (source) as well as that of an electronic load (sink). In sink mode the device is regenerative and feeds the energy back into the local grid with an efficiency of up to 96%. The PSBE 10000 series includes single and three phase units which, together with the wide input range, allows use with practically all global mains voltages. The DC voltages and currents are determined by the application and the spectrum ranges from 0 - 10 V to 0 - 2000 V and from 0 - 6 A up to 0 - 1000 A in a single device. The DC supply operates as a flexible output stage with a constant power characteristic (autoranging) with a wide voltage and current range. To achieve higher power and current all units are equipped with a master-slave bus. This enables up to 64 parallel connected devices to be combined into one system which can provide up to 1920 kW and 64000 A. Such a system works as a single unit and can use different power classes, only the voltage class must remain constant. In this way a user can construct a 75 kW system from two 30 kW 4U and one 15 kW 3U device from the PSB or PSBE 10000 range. Furthermore, typical laboratory functionality is provided. This includes an alarm management, various industrial interfaces, software solutions and many more functions.

## AC connection

The DC power supplies in the PSBE 10000 series are equipped with an active PFC which provides a high efficiency at a low energy consumption. Furthermore, the devices in this series provide a wide input voltage range. It reaches from 110/120 V up to 240 V with 1-phase models and from 208 V to 380/400/480 V with 3-phase models. Hence the devices can be operated in the majority of global grids. They adjust automatically, without additional configuration, to the available grid voltage. In a 110/120 V and 208 V AC grid a derating of the DC output power is automatically set.

## Energy recovery

The energy consumed in load mode is fed back into the connected grid with an efficiency of up to 96%. As the energy is not converted to heat as in other loads, the energy costs are reduced. In addition, the devices generate less heat requiring less cost intensive air conditioning. One device can already be sufficient for a wide range of applications, reducing investment and installation costs.

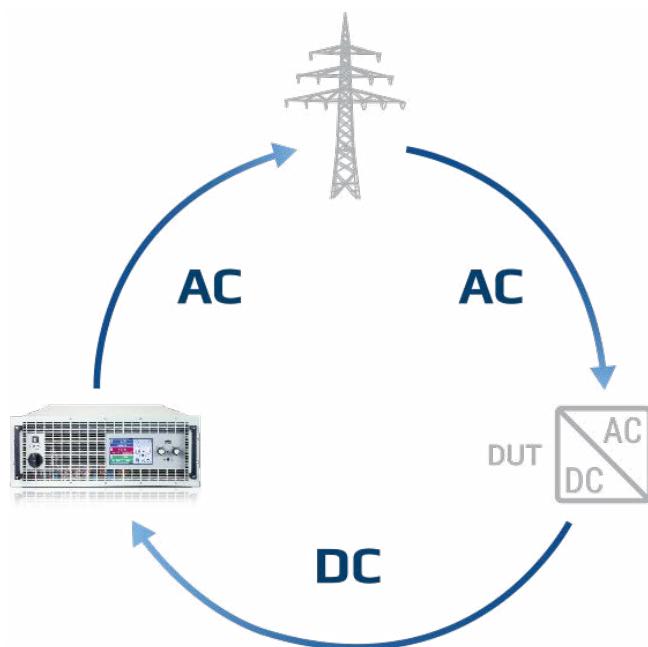

## The principle of energy recovery


The figure above demonstrates, based on a typical application, how a „device under test“ consumes energy from the mains, converts it to DC and feeds that into an EA device. The bidirectional power supply PSBE 10000 converts this energy back into an AC current and feeds it back into the grid.

## DC output

The DC output of the bidirectional power supply PSBE 10000 3U is rated for DC voltages of 0 - 10 V up to 0 - 2000 V, allowing positive or negative currents of 0 - 20 A up to 0 - 510 A as a two- quadrant device. The flexible output stages (autoranging) provide the user with a wide voltage, current and power range and hence a wider field of working than traditional power supplies.

## DC connection

Connection of the DC output is via a copper rail on the back side of the device. If a system with higher performance is required, the devices are simply connected in parallel. With minimal effort devices can be linked with the vertical copper rails. A cover for contact protection is provided.

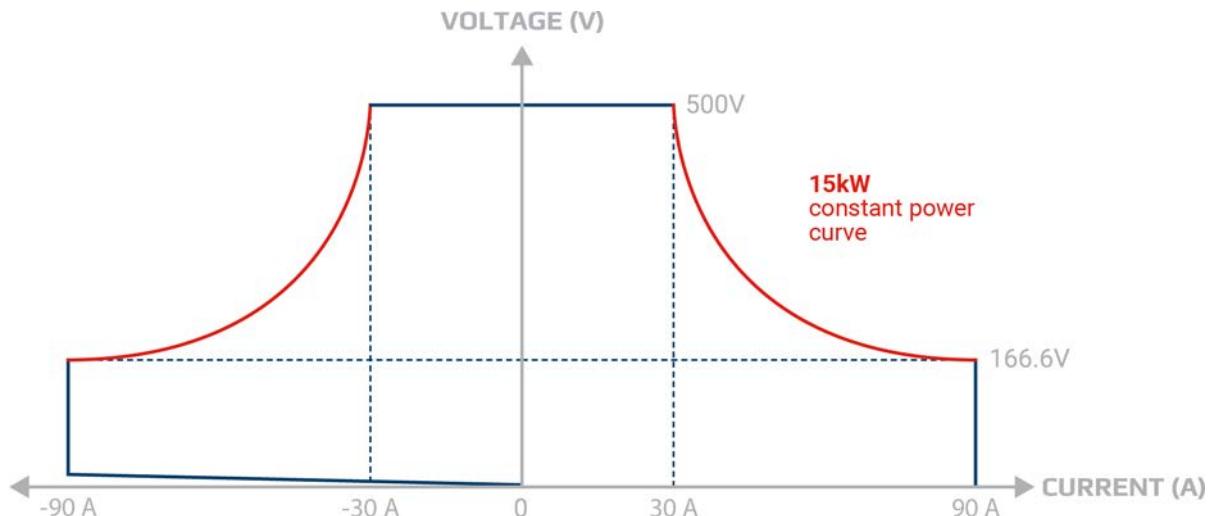

## The principle of autoranging

„Autoranging“ is a term used when a bidirectional programmable DC power supply automatically offers a wider output and input range of both, voltage and current, to maintain full power across a wide operation range. This type of solution allows the use of a single unit to address multiple voltage and current combinations.

## Interfaces

As standard, 10000s series devices are fitted with the most important interfaces and ports which are all galvanically isolated from the DC input. There is an analog interface which can be parameterized for input and output, control and monitoring, of 0 - 5 V or 0 - 10 V for voltage, current, power and resistance, assorted inputs and outputs as well as USB and Ethernet ports. Further optional industrial interface for plug & play slot complete the portfolio:

- CAN
- CANopen
- RS232
- Profibus
- EtherCAT
- Profinet, with one or two ports
- Modbus, with one or two ports
- Ethernet, with one or two ports

## High performance systems

High power applications can be covered with high power systems of up to 960 kW. These are achieved by using the outputs of many PSBE 10000 3U devices and connecting them in parallel using copper rails. A 19" cabinet with a height of 42U can hold up to 12 units of 3U and thus form a system of up to 180 kW occupying only 0.6 m<sup>2</sup> (6.5 sqft) of floor space. The master/slave bus allows for up to 6 cabinets with a maximum of 64 units and up to 15 kW each to behave as one unit.

## Master-slave bus and Share bus

When the integrated master-slave bus and Share bus are used, a multi device system behaves as a single device. The buses are simply connected between each device. With the master-slave bus the system data, such as total power and total current, are collected and displayed on the master unit. Warnings and alarms of the slave devices are also clearly displayed. The Share bus cares for a balanced load distribution between the individual units.



## Example representation

In this illustration you can see a fully assembled and wired 240 kW system, realized with 30 kW 4U units.

## Applications

### Battery simulation

Additional applications include the simulation of batteries as single cells, modules, or packs. These simulations aid in the optimal configuration of energy storage as well as the supplied components under test. Wherever reproducible data are needed a battery simulator is the first choice. Also, the use of a power source as simulator provides protection for the connected consuming component. The overcurrent protection (OCP) can, like a safety fuse, switch off the DC output and generate an alarm. The voltage can be monitored and can, if over or under limits, trigger various functions, and also generate warnings and alarms. Thus, many integrated functions can be safely performed.

### Fuel cell test

The devices in the PSBE 10000 range may be used for testing the electrical features of fuel cells, fuel cell stacks and fuel cell systems. Here they generate highly accurate and reproducible results in all electrical modes. To test the resistance, performance, and active life of a fuel cell quickly and economically users can readily incorporate the devices into an automatic test system. The feedback capability guarantees high level of energy and cost efficiency. If higher currents are needed for testing a complete fuel cell system, then multiple devices can be connected in parallel in a master-slave system. Here high accuracy and performance are maintained.


### On-board charger test

In an on-board charger test (OBC) the electrical features must be tested under various conditions. This requires a flexible test system which also provides test data. With the sequencing and logging functions of the PSBE 10000 devices test procedures allow data to be exported and saved. In this way applications can promptly generate reproducible test results based on dynamic and highly accurate set point and measurement data. To avoid competition between two separate control loops of the device under test (DUT) and the testing device, the control frequency of the bidirectional power supply is adjustable. The modes Normal, Fast and Slow allow the PSBE 10000 devices to match the control characteristics of the on board charger.


### Battery recycling

In combination with the software EA-Power Control it's possible to assess retired batteries from electric vehicles for a possible further use. Assessment of a battery pack starts with a state of health (SOH) check to determine if a second life is feasible. This integrated function can be initiated with one click. If this check shows too little rest capacity, then the battery must be fully discharged before recycling. The autoranging of the devices guarantees the maximum possible total discharge, even with voltages under 2 V. The mains feedback to the power grid at up to 96% efficiency makes this process highly cost effective.


## Technical drawings PSBE 10000 3U <200 V

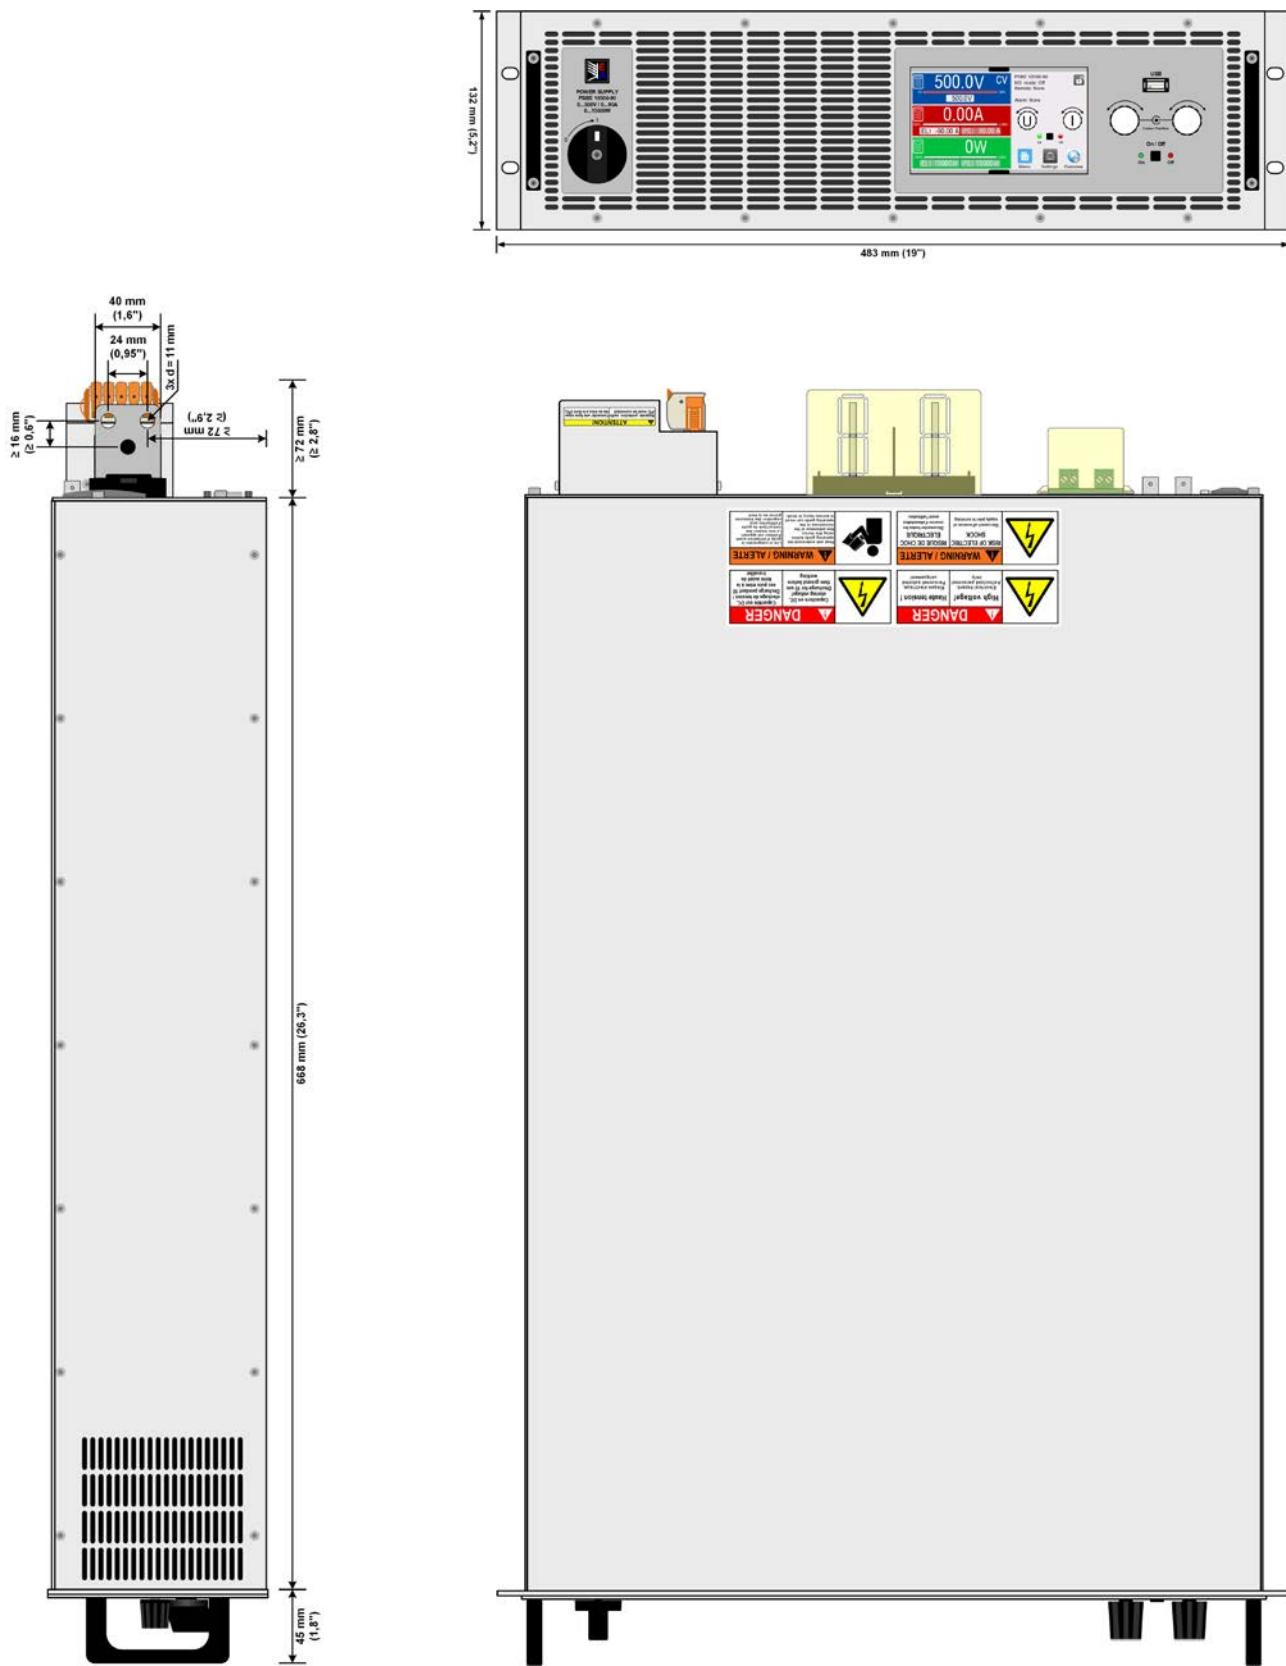

## Technical drawings PSBE 10000 3U ≥360 V

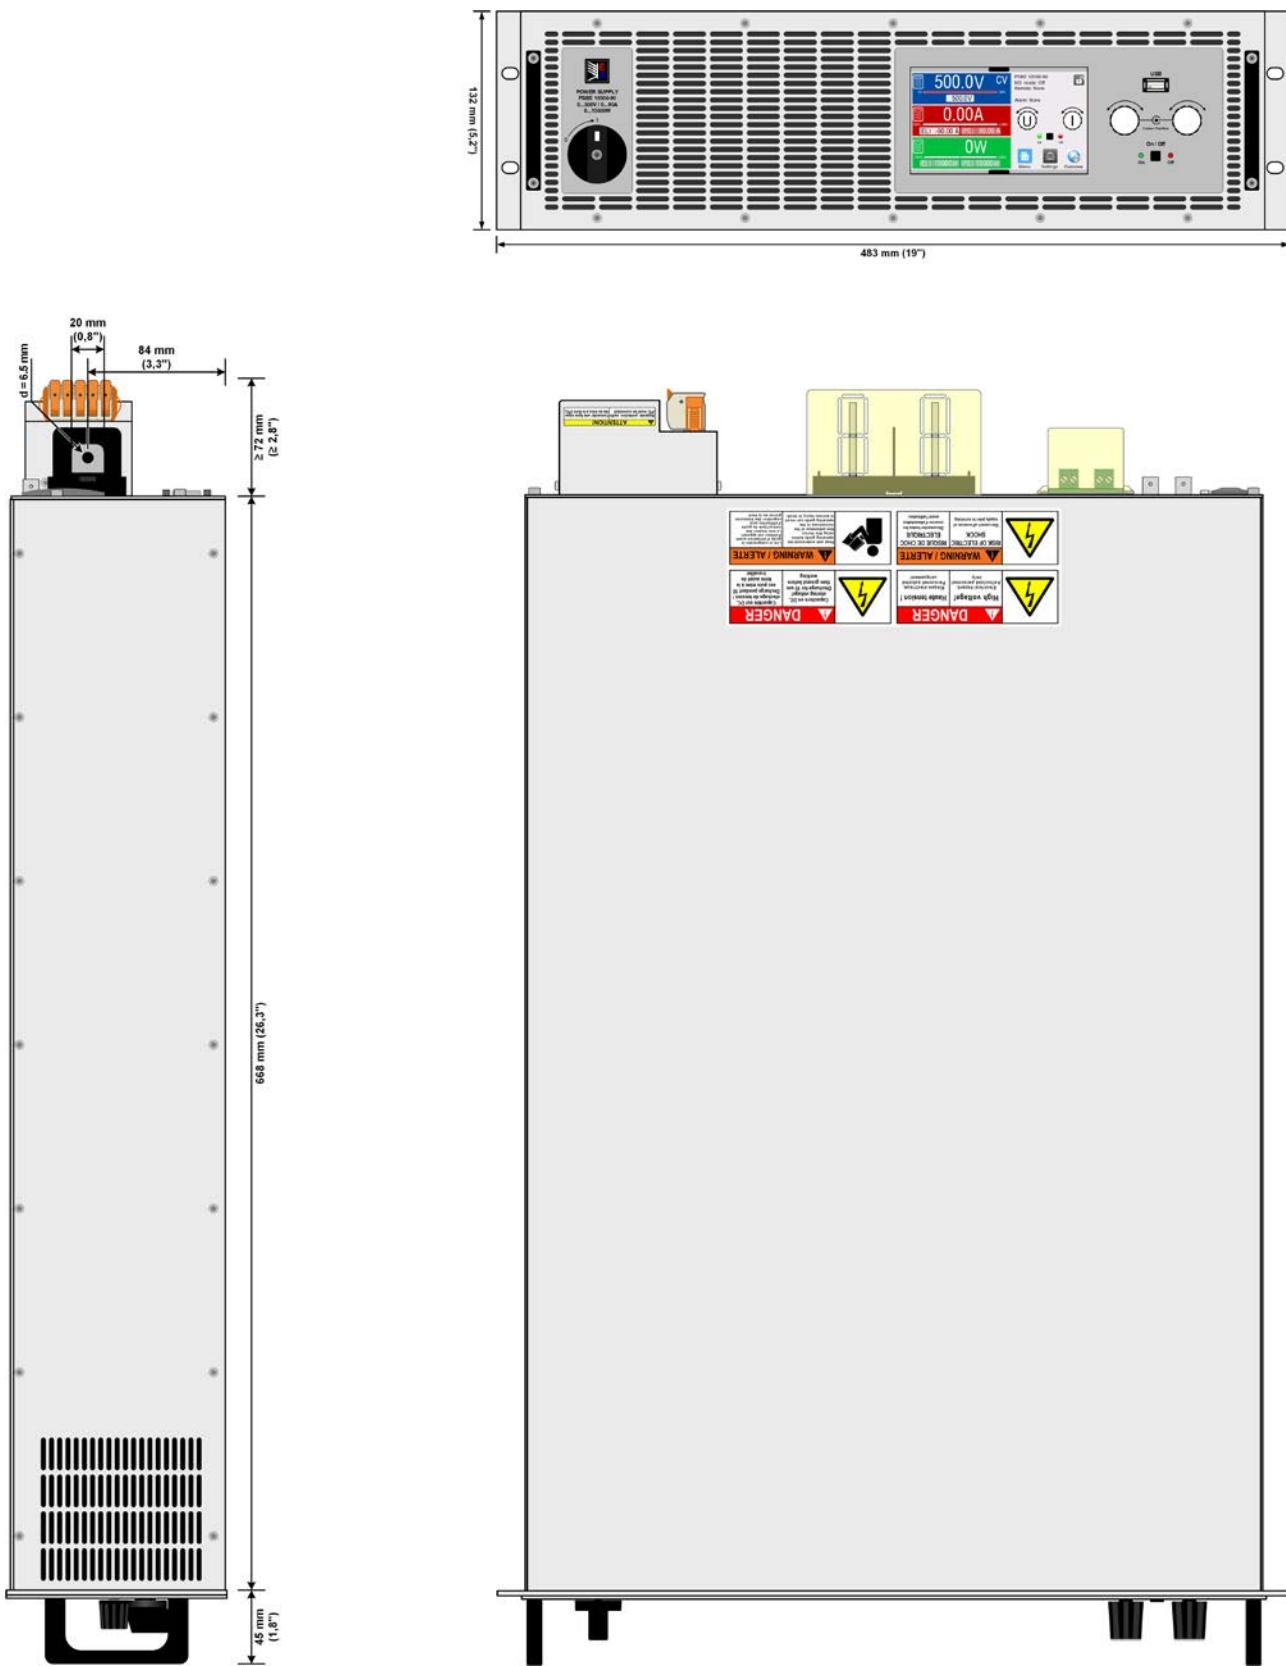


## Front panel description PSBE 10000 3U

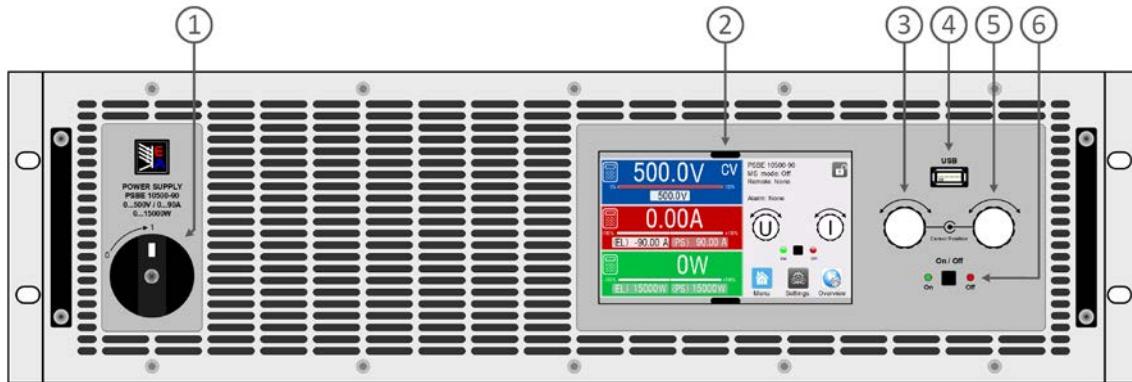

1. Power switch
2. TFT control interface, interactive operation and display
3. Rotary knob with push-button action, for settings and control
4. USB host, uses USB sticks for data logging and sequencing
5. Rotary knob with push-button action, for settings and control
6. On / Off push-button with LED status display

## Rear panel description PSBE 10000 3U

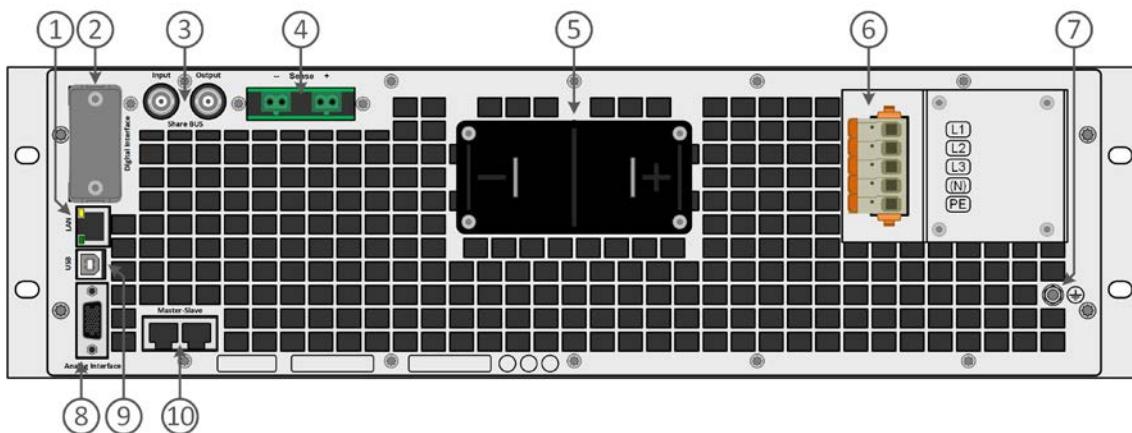

1. Ethernet interface
2. Slot for interfaces
3. Share bus connectors to set up a system for parallel connection
4. Remote sense connectors
5. DC output terminal (copper blades)
6. AC input connector
7. Grounding connection screw (PE)
8. Connector (DB15 female) for isolated analog programming, monitor and other functions
9. USB interface
10. Master-slave bus connectors to set up a system for parallel connection

**EA Elektro-Automatik GmbH**  
Helmholtzstr. 31-37  
41747 Viersen

Telefon: +49 (0) 2162 3785 - 0  
Fax: +49 (0) 2162 16230  
ea1974@elektroautomatik.com

**[www.elektroautomatik.com](http://www.elektroautomatik.com)**  
**[www.tek.com](http://www.tek.com)**



Mess- und Prüftechnik. Die Experten.

**Ihr Ansprechpartner /  
Your Partner:**

**dataTec AG**  
E-Mail: [info@datatec.eu](mailto:info@datatec.eu)  
**[>>> www.datatec.eu](http://www.datatec.eu)**



**Elektro-Automatik**