



# PEL-3000/3000H Series

Programmable D.C. Electronic Load

## FEATURES

- Operating Voltage (DC) : 0~150V(PEL-3000)/0~800V(PEL-3000H)
- Operating Mode : C.C/C.V/C.R/C.P/C.C+C.V/C.R+C.V/C.P+C.V
- Parallel Connection of Inputs for Higher Capacity (Max : 9,450W)
- Support of High Slew Rate : Max 16A/ $\mu$ s(PEL-3000)/0.84A/ $\mu$ s(PEL-3000H)
- Run Program Function (Go/NoGo Test)
- Sequence Function for High Efficient Load Simulations
- Dynamic (Switching) Function : 0.0166Hz~20kHz
- Soft Start Function : Off/On (1~200ms, Res. 1ms)
- Adjustable OCP/OVP/OPP/UVP Setting
- Short Circuit Function
- Timer Function : Elapsed Time of Load on
- Cut Off Time (Auto Load Off Timer) : 1s to 999h 59min 59s or Off
- External Channel Control/Monitoring Via Analog Control Connector
- Setup Memories : 100 sets
- 3.5 Inch TFT LCD Display
- Multi Interface : USB 2.0 Device/Host, RS-232, GPIB/LAN (Optional)

# Flexible Power Combinations, High-Speed and Versatile Load Simulations

The PEL-3000 Series, a single-channel, programmable D.C. electronic load with 0.01mA current resolution and 16A/ $\mu$ s current Slew Rate, is very ideal for testing server power supply and SPS (Switching Power Supply) for commercial and industrial computers. For a heavy-duty device like cloud ecosystem running 24-hour nonstop operations, a stable and high-power power supply, ranging from 350W to 1500W, is required to maintain the normal operation of server, Hub, and the equipment of data storage and internet communications. Owing to the increasing demand of data transmission and large scale data storage of telecommunications systems, the infrastructure of internet communications is in the pace of rapid expansion. This has greatly boosted the market demand of telecommunications equipment powered by power supply of 2000W and above. The flexible power combination of PEL-3000 Series meets the test requirements of present high-power power supply. The PEL-3000H Series programmable DC Electronic load, which not only inherited functions and features from the PEL-3000 Series but providing three current ranges for all PEL-3000H Series and adding voltage monitor BNC terminals on the front panel. The PEL-3000H Series, a single-channel, programmable D.C. electronic load with 800V and 0.84A/ $\mu$ s current Slew Rate, is ideal for the test of the high voltage devices such as the EV & HEV in-vehicle chargers, DC/DC converters or high-voltage batteries. With respect to battery testing applications such as rechargeable battery for electrical tools, battery module and automobile battery, PEL-3000(H) Series has three stand-alone models to offer including 175W, 350W, 1050W and Booster. By connecting Booster 2100W units with master units, the maximum load capacity of the whole system can reach 9,450W. Hence, the PEL-3000(H) Series fulfills various power testing requirements including medium to low power or high-power power supply.

The PEL-3000(H) Series has seven operating modes and three operating functions. Among the seven operating modes, four of them are basic operating modes, including constant current, constant voltage, constant resistance, and constant power, and the other three are advanced operating modes including constant current + constant voltage, constant resistance + constant voltage, and constant power + constant voltage. Users must first select operating mode and then operating function based upon the test requirements. Static, Dynamic and Sequence operating functions can be applied to different testing conditions including a fixed load level, switching between two levels or switching among more than two levels. Sequence function is divided into Fast Sequence and Normal Sequence according to the test time of each step. Both Dynamic and Sequence are to assist users to simulate the genuine load change. For instance, PEL-3000(H) Series can simulate HEV current consumption to make sure that automobile battery can supply HEV with sufficient power need on the road. By so doing, manufacturers can elevate product quality and reliability.


The Soft Start function of the PEL-3000(H) Series can set current rise time for the moment PEL-3000(H) Series is turned on to reduce the abnormal situation of the voltage drop of power supply under test. The adjustable Under Voltage Protection (UVP), GO/NO GO voltage input monitoring function, current monitoring function and Timer Function to control load activation time can be jointly applied to the characteristic tests of battery bleeding to avoid battery damage during bleeding operation. Based upon the functionalities described above, the PEL-3000(H) Series can test a vast variety of power supply ranging from the fundamental static sink current to complex dynamic load simulations so as to enhance product quality and reliability.

## The single unit D.C Electronic Load of PEL-3000(H) Series

The PEL-3000(H) Series is a high speed, single channel and programmable D.C. electronic load and its power, functionality, parallel combination and size are listed on the following chart :


MODEL	PEL-3021(H)	PEL-3041(H)	PEL-3111(H)	PEL-3211(H)
<b>Power</b>	175W	350W	1,050W	2,100W Booster
<b>Function</b>	Full-function Single Unit	Full-function Single Unit	Full-function Single Unit	No control panel, can not be operated alone
<b>Parallel Combination</b>	Parallel with same model, 5 units the maximum	Parallel with same model, 5 units the maximum	Parallel with same model, 5 units the maximum Parallel with the maximum of four PEL-3211(H)s	Parallel with PEL-3111(H)
<b>Size</b>	Half Rack	Half Rack	Full Rack	Full Rack

## A. OPERATING FUNCTION FOR MASTER AND SLAVE IN PARALLEL

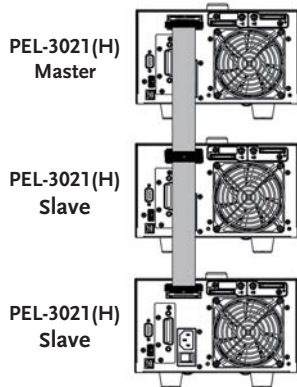

Three PEL-3021(H) in Parallel

PEL-3000(H) Series connects with loads via MIL 20-pin interface and connecting cables to designate a master to control other slave units in parallel. One PEL-3111(H) and four PEL-3211(H) in parallel provide the maximum power of 9,450W.

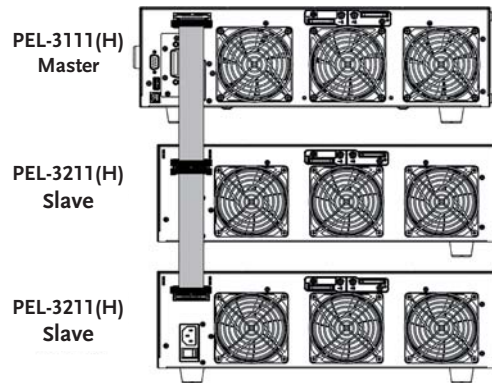


One PEL-3111(H) connects with two PEL-3211(H) in Parallel

Parallel arrangement allows users to flexibly select and apply different power arrangement which enhances equipment utilization efficiency to save R&D cost.


## B. OPERATING MODE

The PEL-3000(H) series provides four fundamental operating modes and three add-on modes of CC, CR and CP separately combining with CV. Users can set different load condition under different operating modes such as setting operating range for load level, Current Slew Rate, input voltage and load current.


The input voltage range has two levels - high and low. The load current operating range has three levels - high, medium and low current levels which possess different resolution to meet test requirements of different power product specifications.

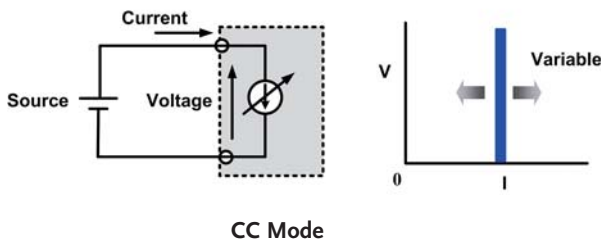


Under constant current mode, electronic load will sink the amount of current users has set. Different current settings via CC mode allow users to test the voltage changes of DC power supply which is called load regulation test.

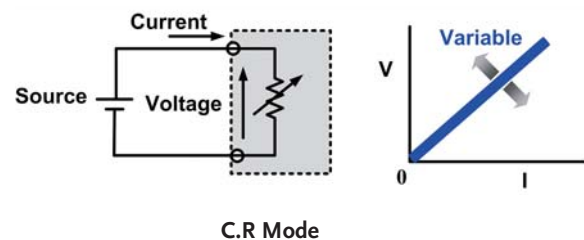


Under constant resistance mode, electronic load will sink load current, which is linearly direct proportion to input voltage. This mode can be utilized in testing voltage or the activation and current limit of power supply.

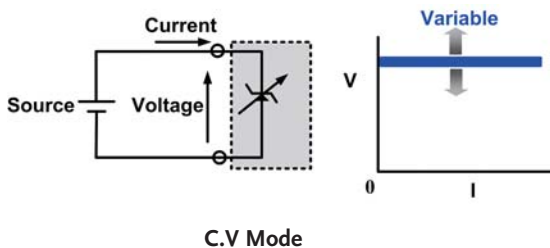


Under constant voltage mode, electronic load will sink sufficient current to regulate the voltage source to the set value. This mode allows users not only to test current limit function of power supply, but also to simulate battery operation in testing battery chargers.

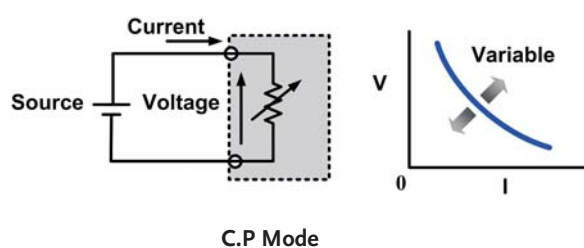


Under constant power mode, electronic load will sink load current, which is indirect proportion to input voltage to reach preset constant power requirement. Hence, the changes of input voltage will have indirect proportion effect on current sinking so as to reach constant power control.



CC+CV Mode



CR+CV Mode



CP+CV Mode

+CV mode can be selected under CC, CR or CP mode. When +CV mode function is turned on and electronic load sinks more current than the maximum current of power supply under test, electronic load will automatically switch to CV mode. It is because that the current sunk is the maximum current of power device. Therefore,


power supply will switch to CC mode and PEL-3000(H) will switch to CV mode to limit electronic load from sinking the total current of power supply so as to prevent power supply under test from damaging. Electronic load will cease operation once the voltage of DUT is lower than the set voltage under +CV mode.

### C. THREE OPERATING FUNCTIONS


The PEL-3000(H) series, according to different test conditions, step or continuous changes, test speeds, and selectable modes, has three operating functions: Static, Dynamic and Sequence, which can be separately applied on a fixed load test; between two loads; or among more than two loads. Detailed descriptions of these functions are as follows:

Static function provides a fixed load to test output stability of power supply. Switching load value A to B will be manually operated. Under Dynamic function, two test conditions can be switched automatically and every set of parameter includes Level, Timer and Slew Rate. Timer can be set to the fastest of 25µs to accommodate response time of different power supply and assist testing power supply output status when load is unstable in order to enhance products' reliability and quality.

Function	Operation	Static	Dynamic	Sequence	
				Fast	Normal
Operating Condition Selection		Single fixed condition	Selection between two conditions	Selection among more than two conditions	Selection from more than two conditions
Operating Modes		All modes	<ul style="list-style-type: none"> <li>Two conditions using same mode</li> <li>CR, CC, CP modes</li> </ul>	<ul style="list-style-type: none"> <li>Each condition must use same mode</li> <li>Support CC or CR mode</li> </ul>	<ul style="list-style-type: none"> <li>Each condition using different mode</li> <li>All modes</li> </ul>
Adjustable Condition Setting		<ul style="list-style-type: none"> <li>A/B Value</li> <li>Slew Rate</li> </ul>	<ul style="list-style-type: none"> <li>Level 1/Level 2</li> <li>Timer 1/Timer 2 (25µs)</li> <li>Slew Rate 1/Slew Rate 2</li> </ul>	<ul style="list-style-type: none"> <li>Level</li> <li>Timer</li> <li>Slew Rate</li> <li>Others...</li> </ul>	<ul style="list-style-type: none"> <li>Level</li> <li>Timer</li> <li>Slew Rate</li> <li>Others...</li> </ul>
Sequence Step Combination		N/A	N/A	<ul style="list-style-type: none"> <li>1 Sequence</li> <li>1,000 steps</li> <li>25µs/step</li> <li>Res. 1µs</li> </ul>	<ul style="list-style-type: none"> <li>10 Sequence</li> <li>1,000 steps</li> <li>10µs/step</li> <li>Res. 10µs</li> </ul>
Other Functions		N/A	N/A	<ul style="list-style-type: none"> <li>Trigger Out function</li> </ul>	<ul style="list-style-type: none"> <li>Trigger Out function</li> <li>Ramp function</li> </ul>

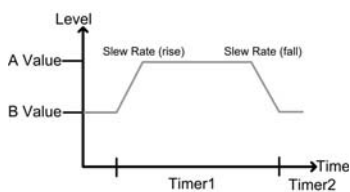


Static Mode

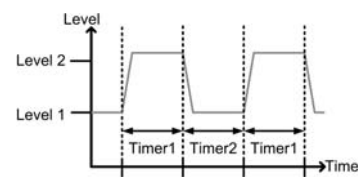


Dynamic Mode

In Sequence function, waveforms of load current edited by Fast Sequence are steps and every step can reach the fastest of 25µs

to provide the high slew rate for electronic loads.

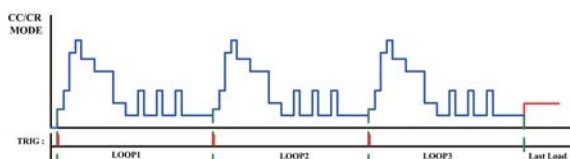

Fast Sequence Diagram

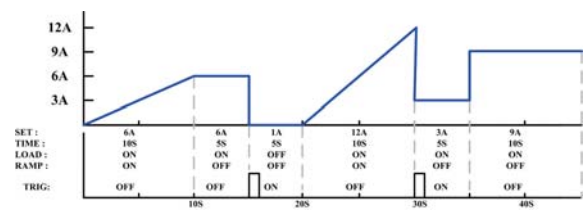

Normal Sequence Diagram

Normal Sequence provides RAMP function to users, according to their requirements, to select between slope and step method under set time to sink current.


By applying a complete sequence editing function, users can control electronic load without using a computer or writing a program so as to save cost and time of R&D.

## D. TRIGGER SIGNAL AND CURRENT MONITORING (IMON)



BNC connectors on the front panel

The front panel of PEL-3000(H), via BNC connectors provides two output signals, which are Trigger Signal and IMON. Under Dynamic or Sequence function, the moment the load current setting is changed BNC on the front panel will output a 4.5V and 2μs pulse voltage. This trigger signal can be set to open or close for every step. Users can use trigger signal to synchronize other devices inside the system.

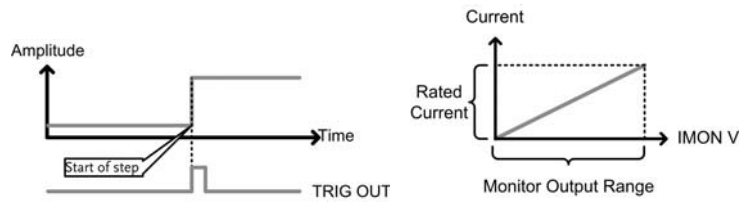


TRIG OUT = ON

IMON OUTPUT


Current monitoring signals, using a BNC connector to compare with the full scale of real load current, output 0 ~ 1V(0~10V for PEL-3000H) at high and low current levels and 0 ~ 0.1V(0~1V for PEL-3000H) at medium current level. Therefore, users can monitor load current change without using current probe to save cost.

## E. VON VOLTAGE AND VON LATCH FUNCTION



Von Latch = OFF

Von Voltage is the threshold voltage for electronic load to activate or terminate sinking current. When Von Latch is set to off, electronic load operation will be activated if input voltage is higher than Von Voltage and electronic load operation will be terminated if input voltage is lower than Von Voltage. When Von



Von Latch = ON

Latch is set to on, electronic load operation will be activated if input voltage is higher than Von Voltage and will continue operation even input voltage is lower than Von Voltage. Von Voltage function can test the transient maximum current capability provided by power supply.

## F. SOFT START



Three different load waveforms of Soft Start Time

Soft Start regulates the time of current rising from 0 to preset value during the moment load is activated. This function is to prevent voltage from dropping due to the fast transient rising speed of load current. Sudden voltage drop will result in an unsuccessful activation of electronic load or DUT and a damaged DUT.

## G. PROTECTION MODES

Functions	Protection	OCP	OVP	OPP	OTP	UVP	RVP
Adjustable Thresholds		✓	✓	✓	Fixed	✓	N/A
Load Off		✓	✓	✓	N/A	✓	Fixed
Limit Function		✓	N/A	✓	N/A	N/A	N/A


The PEL-3000(H) Series provides many protective functions including over current protection (OCP), over voltage protection (OVP), over power protection (OPP), over temperature protection (OTP) and under voltage protection (UVP). Except for OTP, all thresholds of protective functions are adjustable. When protective function is activated, electronic load will send out warning signal and terminate operation. Other than protective functions, Limit function can also be utilized to maintain electronic load in operation at a preset value. The related settings and selections are as above: Take UVP as an example. In battery bleeding tests, electronic load will cease operation if battery voltage is lower than the set protective threshold value in order to prevent battery from over bleeding.



## H. ANALOG CHANNEL CONTROL



Rear Panel




External Voltage Connection


The PEL-3000(H) Series provides the external analog channel control function, which allows users to connect J1 and J2 MIL 20 pin standard connectors on the rear panel to input voltage or to connect resistance to control electronic load operation. Input voltage is limited to the range of 0 ~ 10V; connecting resistance

is limited to the range of 0Ω ~ 10kΩ; and related to load level are 0~100%. For instance, when operating PEL-3021 under CC mode and 35A, external input voltage is 1V and sink current is 3.5A. Users can integrate this function into test system and utilize signals generated from the test system to control PEL-3000(H) Series.

## I. BATT TEST AUTOMATION



BATT Test Automation Editing



Waveform of TEST Result


BATT TEST		PEL-3000		V1,31,003	
PARAMETER OF BATT TEST					
BATT No.	1				
(1) Mode	CC				
(2) Range	0.0V				
(3) Set Cnt	1.000 A				
(4) Stop Volt	3.00 V				
(5) Stop Time	0 h	0 m	30 s		
(6) Stop AH	0.20 Ah				
TEST RESULTS					
Start Time	2008/1/07/01				
End Time	2008/1/07/01				
(1) Test Length	0 h	0 m	0 s		
(2) Recorder Length	0 h	0 m	0 s		
(3) Stop Condition	Under VOLT				
(4) DATA LIST(S)	Time(sec)	V	I		
No.	VOLT(V)	CURRENT(A)	POWER(W)	AH	WH
20	0	10.01	0.002	0.0002	0
21	1	9.94	0.000	5.00002	0.0002
22	2	6.85	0.000	8.00016	0.0002
23	3	7.85	0.000	7.8143	0.0008
24	4	6.85	0.000	5.00020	0.0004
25	5	5.87	0.000	5.00026	0.0014
26	6	5.85	0.000	5.00030	0.0016
27	7	4.88	0.000	4.00028	0.0019
28	8	2.86	0.000	2.85428	0.0002
29					0.0137

Sample of Data Log

The built-in BATT Test Automation of PEL-3000(H) provides battery discharge applications with more flexible discharge stop time setting as well as rise and fall Slew Rate for discharge current settings. Under CP, CC or CR mode, the conditions for stop


discharge can be set respectively. For instance, set the input voltage for stop discharge current, the execution time for discharge current or total discharge current\*time (AH) to satisfy the verification of battery capability.

## J. OCP TEST AUTOMATION

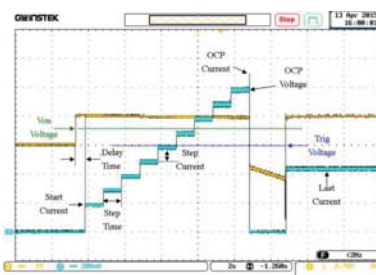


OCP test Automation for DUT(Power Supply), provide users with high resolution OCP measurement values to verify DUT's OCP activation point. It also provides users with measurement results so as to help them determine whether DUT's actual OCP activation point meets the regulations. It can test the value of OCP by setting load current increment from start current to stop current. OCP's activation point can be accurately measured.

## K. OPP TEST AUTOMATION

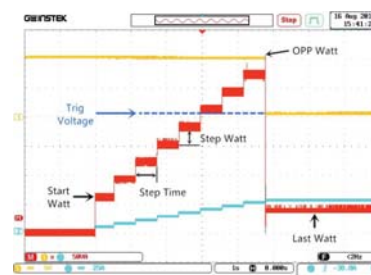


OPP test Automation for DUT(Power Supply), provide users with high resolution OPP measurement values to verify DUT's OPP activation point. It also provides users with measurement results so as to help them determine whether DUT's actual OPP activation point meets the regulations. It can test the value of OPP by setting power increment from start power to stop power. OPP's activation point can be accurately measured.

## L. TIMER FUNCTIONS



Elapsed Time

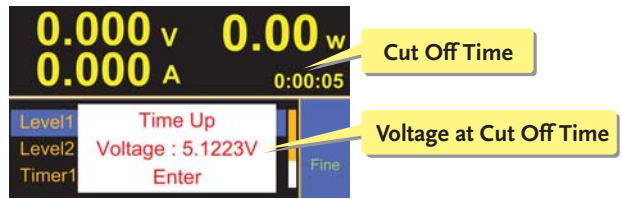


Voltage at Cut Off Time

The PEL-3000(H) Series provides count time and cut off time functions. The display screen will show present activation time when electronic load is activated. When electronic load operation is terminated count time will stop and the total operation time will be shown on the display screen.

The activation time of cut off time can be set to the maximum length of 999h 59min 59s. When electronic load is activated

this function will start counting time. Electronic load will cease operation (load off) and show the final input voltage on the screen when preset time is reached. Timer function can provides information and application related to time. Users can obtain the total time of limiting electronic load operation to increase the agility of electronic load tests.

## M. MASTER/SLAVE PARALLEL CONTROL

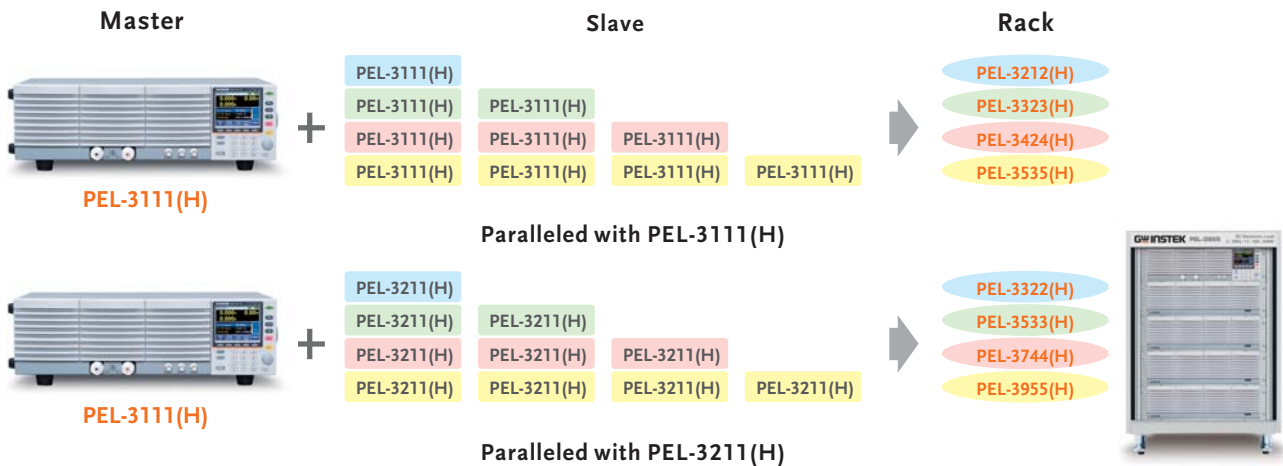

PEL-3111 (H) can be used as either master or Slave. PEL-3111 (H) can also be connected in parallel with PEL-3211 (H) (Booster unit). Customers, based upon their DUT requirements, can collocate different models to meet their power requirements. The system collocation connection and terminals are all copper bar structure. System Rack is also available. When the Master/Slave control mode is selected, Master will automatically calculate current sunk as soon as load has been activated. The system will automatically

distribute current to each Master/Slave unit. For Master/Slave parallel collocation, users only enter settings and edit programs on Master. Logically speaking, Master/Slave parallel collocation can be regarded as one single load unit. Therefore, this collocation can safely provide load capacity with actual current and power in the respective level. Parallel collocation can also meet different current and power requirements.

## N. RACK MODEL COLLOCATION AND RATED POWER

Model	PEL-3322	PEL-3533	PEL-3744	PEL-3955
Watt	3150W	5250W	7350W	9450W
Current	0-630A	0-1050A	0-1470A	0-1890A
Collocation	PEL-3111+PEL-3211	PEL-3111+PEL-3211 x 2	PEL-3111+PEL-3211 x 3	PEL-3111+PEL-3211 x 4


Model	PEL-3322H	PEL-3533H	PEL-3744H	PEL-3955H
Watt	3150W	5250W	7350W	9450W
Current	0-157.5A	0-262.5A	0-367.5A	0-472.5A
Collocation	PEL-3111H+PEL-3211H	PEL-3111H+PEL-3211H x 2	PEL-3111H+PEL-3211H x 3	PEL-3111H+PEL-3211H x 4

Model	PEL-3212	PEL-3323	PEL-3424	PEL-3535
Watt	2100W	3150W	4200W	5250W
Current	0-420A	0-630A	0-840A	0-1050A
Collocation	PEL-3111 x 2	PEL-3111 x 3	PEL-3111 x 4	PEL-3111 x 5


Model	PEL-3212H	PEL-3323H	PEL-3424H	PEL-3535H
Watt	2100W	3150W	4200W	5250W
Current	0-105A	0-157.5A	0-210A	0-262.5A
Collocation	PEL-3111H x 2	PEL-3111H x 3	PEL-3111H x 4	PEL-3111H x 5

## O. SUCCESS CASE OF HIGH POWER MODEL IN PARALLEL

Load's Waveform Shown on Right Diagram :

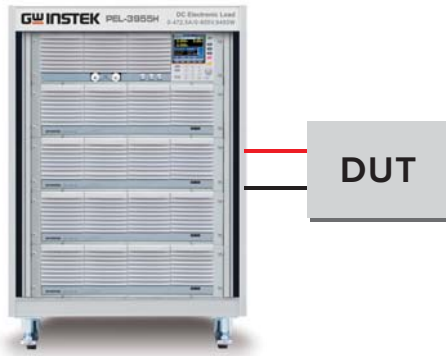

Connection Diagram of Application

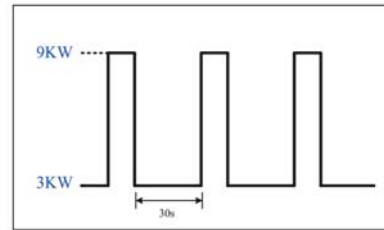

Example the Waveform of Load

Some large power supply system has a stable load of 3kW under the normal duty operation and its dynamic load of transient peak will reach 9kW. This system uses PEL-3955 to simulate load patterns so as to assist engineers in analyzing and testing DUT. The procedures:


- \* Select load mode as CC or CP
- \* Select appropriate operational level: Both I & V range in High
- \* Select operational mode as Dynamic mode or Sequence
- \* Set related load arguments sequentially Level1, Level2, Slew Rate and Duration Time
- \* If Sequence is selected, each segment's load condition must be set according to users' requirements
- \* Execute load operation

## P. HIGH POWER MODEL AUGMENTATION AND PARALLEL

To meet customers' larger sink current, larger power and flexible application of electronic load requirements, the design concept of the PEL-3000 series not only meets the requirement of low power products with high resolution, but also supports the measurement of high power and large current. Single unit of the series can satisfy various load conditions. For higher power

requirements, users can consider purchasing additional Slave control system to collocate the system in parallel through system connection. For operating PEL-3955 (1.5~150V/1890A/9.45kW), six units of PEL-3955 are arranged in parallel to reach load capacity of 56.7kW. Bus bar connection can guarantee the safety of large power and large current operations.

## Q. LARGER POWER MODEL DYNAMIC SYNCHRONIZATION CONTROL




Waveform of power load

To ensure each Rack can execute synchronized parallel load operation and to simulate the real dynamic load operation. The orange curve of the above diagram shows PEL-3955 executing dynamic synchronized control under external parallel. Comparing with other electronic loads in parallel, the PEL-3000 series does not delay. PEL-3955, with its superior performance and distinct characteristics, has been widely used as test and verification


equipment in the power test field. In addition to single unit electronic load of 1kW, larger power models have power outputs including 3kW/5kW/7kW/9kW/18kW/27kW/36kW/54kW, which provide the most important test and verification platform for R&D and QA in the fields of server power system, communications power system, hybrid power pack, solar power module.



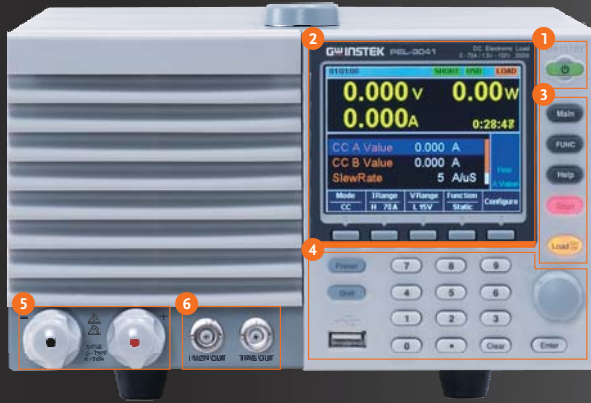


### PEL-3000 Series

1. ON / STBY
2. LCD Display
3. Function Keys
4. Operation Key
5. Front Panel Input Terminals
6. I MON, TRIG OUT Terminals

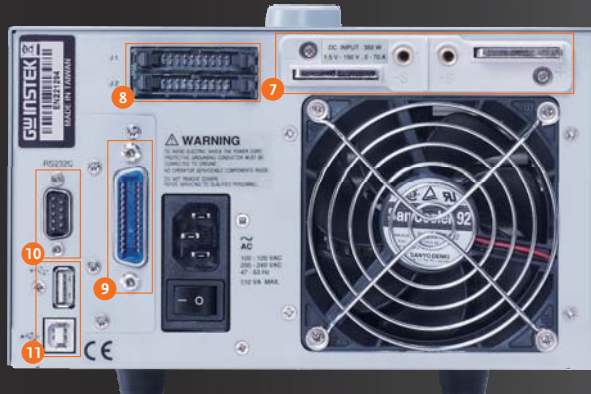

### PEL-3000H Series

1. ON / STBY
2. LCD Display
3. Function Keys
4. Operation Key
5. Front Panel Input Terminals
6. VMON, I MON, TRIG OUT Terminals
7. Rear Panel Inputs Terminals
8. Frame Control Ports, J1, J2
9. GPIB/LAN
10. RS232C Port
11. USB Port
12. Variable Resistors

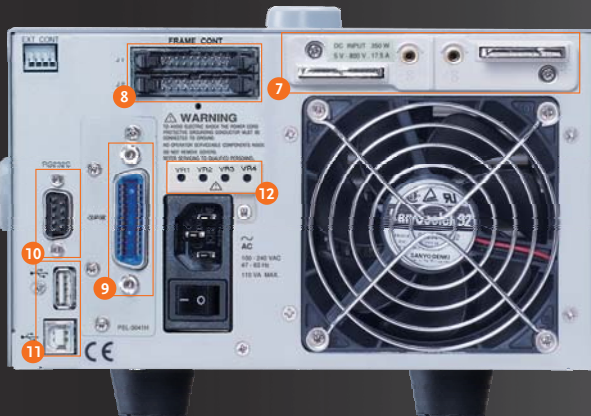

## SPECIFICATIONS

Model		PEL-3021			PEL-3041			PEL-3111			PEL-3211	
Voltage		0V~150V			0V~150V			0V~150V			0V~150V	
Current		35A			70A			210A			420A	
Power		175W			350W			1050W			2100W	
Input Resistance		500 kΩ			500 kΩ			500 kΩ			500 kΩ	
Min. Operating Voltage(DC)(Typ.)		0.75V@17.5A 1.5V@35A			0.75V@35A 1.5V@70A			0.75V@105A 1.5V@210A			0.75V@210A 1.5V@420A	
<b>CONSTANT CURRENT MODE</b>												
Operating Range	H, M, L	0~35A	0~3.5A	0~0.35A	0~70A	0~7A	0~0.7A	0~210A	0~21A	0~2.1A	420A	
Accuracy of Setting	H, M	$\pm(0.2\% \text{ of set} + 0.1\% \text{ of f.s.}^{*1}) + \text{Vin}^{*2}/500 \text{ k}\Omega$									$\pm(1.2\% \text{ of set} + 1.1\% \text{ of f.s.})$	
Accuracy of Setting	L	$\pm(0.2\% \text{ of set} + 0.1\% \text{ of f.s.}^{*1}) + \text{Vin}^{*2}/500 \text{ k}\Omega$									N/A	
Accuracy of Setting(Parallel)		$\pm(1.2\% \text{ of set} + 1.1\% \text{ of f.s.}^{*3})$									$\pm(1.2\% \text{ of set} + 1.1\% \text{ of f.s.})$	
Resolution	H, M, L	1mA	0.1mA	0.01mA	2mA	0.2mA	0.02mA	10mA	1mA	0.1mA	N/A	
<b>CR MODE</b>												
Operating Range	Range	H	23.3336S~400μS (42.857mΩ~2.5kΩ)			46.6672S~800μS (21.428mΩ~1.25kΩ)			140.0016S~2.4mS (7.1427mΩ~41.6667kΩ)			280.0032s~4.8ms (3.5714mΩ~208.3334Ω)
		M	2.33336S~40μS (428.566mΩ~25kΩ)			4.66672S~80μS (214.28mΩ~12.5kΩ)			14.00016S~242.4μS (71.427mΩ~4.16667kΩ)			28.0032s~484.8μs (35.7135mΩ~2.083334Ω)
		L	0.233336S~4μS (4.28566Ω~250kΩ)			0.466672S~8μS (2.1428Ω~125kΩ)			1.400016S~24.24μS (714.27mΩ~41.6667kΩ)			N/A
Accuracy of Setting	H, M	$\pm(0.5\% \text{ of set}^{*5} + 0.5\% \text{ of f.s.}^{*1}) + \text{Vin}^{*2}/500\text{k}\Omega$									$\pm(1.2\% \text{ of set} + 1.1\% \text{ of f.s.})$	
Accuracy of Setting	L	$\pm(0.5\% \text{ of set}^{*5} + 0.5\% \text{ of f.s.}^{*1}) + \text{Vin}^{*2}/500\text{k}\Omega$									N/A	
Parallel		$\pm(1.2\% \text{ of set} + 1.1\% \text{ of f.s.}^{*3})$									N/A	
Resolution	H, M, L	400μS	40μS	4μS	800μS	80μS	8μS	2.4mS	240μS	24μS	N/A	
<b>CONSTANT VOLTAGE MODE</b>												
Operating Range	Range	H	1.5V~150V									1.5V~150V
		L	1.5V~15V									1.5V~15V
Accuracy of Setting	H, L	$\pm(0.1\% \text{ of set} + 0.1\% \text{ of f.s.})$									N/A	
Resolution	H, L	10mV/1mV									N/A	
<b>CONSTANT POWER MODE</b>												
Operating Range	Range	H	17.5W~175W			35W~350W			105W~1050W			210W~2100W
		M	1.75W~17.5W			3.5W~35W			10.5W~105W			21W~210W
		L	0.175W~1.75W			0.35W~3.5W			1.05W~10.5W			N/A
Accuracy of Setting	H, M, L	$\pm(0.6\% \text{ of set}^{*5} + 1.4\% \text{ of f.s.}^{*3}) + \text{Vin}^{*2}/500\text{k}\Omega$									N/A	
Resolution	H, M, L	10mW	1mW	0.1mW	10mW	1mW	0.1mW	100mW	10mW	1mW	N/A	
<b>PARALLEL Mode</b>												
Capacity		875W			1750W			5250W			PEL-3111 with 4 booster units : Max 9.45kW	
<b>SLEW RATE</b>												
Operation Mode		CC, CR			CC, CR			CC, CR			N/A	
Setting Range (CC mode)	Range	H	2.5mA/μs~2.5A/μs			5mA/μs~5A/μs			16mA/μs~16A/μs			N/A
		M	250μA/μs~250mA/μs			500μA/μs~500mA/μs			1.6mA/μs~1.6A/μs			N/A
		L	25μA/μs~25mA/μs			50μA/μs~50mA/μs			160μA/μs~160mA/μs			N/A
Setting Range (CR Mode)	Range	H	250μA/μs~250mA/μs			500μA/μs~500mA/μs			1.6mA/μs~1.6A/μs			N/A
		M	25μA/μs~25mA/μs			50μA/μs~50mA/μs			160μA/μs~160mA/μs			N/A
		L	2.5μA/μs~2.5mA/μs			5μA/μs~5mA/μs			16μA/μs~16mA/μs			N/A
Accuracy of Setting	H, M, L	$\pm(10\% \text{ of set}^{*9} + 5\mu\text{s})$									N/A	
Resolution		1mA(250mA~2.5A/μs) 100μA(25mA~250mA/μs) 10μA(2.5mA~25mA/μs) 1μA(250μA~2.5mA/μs) 100nA(25μA~250μA/μs) 10nA(2.5μA~25μA/μs)			2mA(500mA~5A/μs) 200μA(50mA~500mA/μs) 20μA(5mA~25mA/μs) 2μA(500μA~5mA/μs) 200nA(50μA~500μA/μs) 20nA(5μA~50μA/μs)			6mA(1.6A~16A/μs) 600μA(160mA~1.6A/μs) 60μA(16mA~160mA/μs) 6μA(1.6mA~16mA/μs) 600nA(160μA~1.6mA/μs) 60nA(16μA~160μA/μs)			N/A	
<b>METER</b>												
Voltmeter Ammeter Ammeter(Parallel Operation)	Accuracy Accuracy Accuracy	$\pm(0.1\% \text{ of rdg} + 0.1\% \text{ of f.s.})$ $\pm(0.2\% \text{ of rdg} + 0.3\% \text{ of f.s.})$ $\pm(1.2\% \text{ of rdg} + 1.1\% \text{ of f.s.})$									N/A	
<b>DYNAMIC MODE</b>												
Operation Mode T1 & T2 Accuracy		CC, CR and CP 0.025mS~10mS/Res : 1μs ; 1ms~60s/Res : 1ms 100ppm of setting									N/A	
Slew Rate (CC Mode)	Range	H	2.5mA/μs~2.5A/μs			5mA/μs~5A/μs			16mA/μs~16A/μs			N/A
		M	250μA/μs~250mA/μs			500μA/μs~500mA/μs			1.6mA/μs~1.6A/μs			N/A
		L	25μA/μs~25mA/μs			50μA/μs~50mA/μs			160μA/μs~160mA/μs			N/A
Slew Rate (CR Mode)	Range	H	250μA/μs~250mA/μs			500μA/μs~500mA/μs			1.6mA/μs~1.6A/μs			N/A
		M	25μA/μs~25mA/μs			50μA/μs~50mA/μs			160μA/μs~160mA/μs			N/A
		L	2.5μA/μs~2.5mA/μs			5μA/μs~5mA/μs			16μA/μs~16mA/μs			N/A
Current Accuracy		$\pm 0.4\% \text{ F.S.}$			$\pm 0.4\% \text{ F.S.}$			$\pm 0.4\% \text{ F.S.}$			$\pm(1.2\% \text{ of set} + 1.1\% \text{ of F.S.})$	
<b>PROTECTION FUNCTION</b>												
Functions		Overvoltage protection (OVP), Overcurrent protection (OCP), Overpower protection (OPP), Overheat protection (OHP), Undervoltage protection (UVP), Reverse connection protection (REV)										
<b>GENERAL</b>												
Input Range		90VAC~132VAC/180VAC~250VAC Single-phase; 47Hz~63Hz										
Power(Max.)		90VA			110VA			190VA			230VA	
Interface		USB/RS232/Analog Control (Standard) ; GPIB/LAN (Option)										
Dimensions & Weight		214.5(W)x124(H)x400(D)mm; Approx. 6kg			214.5(W)x124(H)x400(D)mm; Approx. 7kg			429.5(W)x128(H)x400(D)mm; Approx. 17kg			427.7(W)x128(H)x592.5(D)mm; Approx. 23kg	

SPECIFICATIONS																											
Model	PEL-3212			PEL-3323			PEL-3424			PEL-3535			PEL-3322			PEL-3533			PEL-3744			PEL-3955					
Voltage	0V~150V			0V~150V			0V~150V			0V~150V			0V~150V			0V~150V			0V~150V			0V~150V					
Current	0~420A			0~630A			0~840A			0~1050A			0~630A			0~1050A			0~1470A			0~1890A					
Power	2100W			3150W			4200W			5250W			3150W			5250W			7350W			9450W					
Input Resistance	250 kΩ			166.7 kΩ			125 kΩ			100 kΩ			500 kΩ			500 kΩ			500 kΩ			500 kΩ					
Min. Operating Voltage(DC)(Typ.)	0.75V@210A			0.75V@315A			0.75V@420A			0.75V@525A			0.75V@315A			0.75V@525A			0.75V@735A			0.75V@945A					
	1.5V@420A			1.5V@630A			1.5V@840A			1.5V@1050A			1.5V@630A			1.5V@1050A			1.5V@1470A			1.5V@1890A					
CONSTANT CURRENT MODE																											
Operating Range	H,M,L	0~420A	0~42A	0~4.2A	0~630A	0~63A	0~6.3A	0~840A	0~84A	0~8.4A	0~1050A	0~105A	0~10.5A	0~630A	0~63A	N/A	0~1050A	0~105A	N/A	0~1470A	0~147A	N/A	0~1890A	0~189A	N/A		
Accuracy of Setting	H,M,L	$\pm(0.2\% \text{ of set} + 0.1\% \text{ of f.s.}^*) + \text{Vin}^*/(500/\text{N k}\Omega)$																									
Resolution	H,M,L	20mA	2mA	0.2mA	30mA	3mA	0.3mA	40mA	4mA	0.4mA	50mA	5mA	0.5mA	30mA	3mA	N/A	50mA	5mA	N/A	70mA	7mA	N/A	90mA	9mA	N/A		
CR MODE																											
Operating Range	Range	H	280.0032S~4.8mS (3.57138mΩ~208.333Ω)			420.0048S~7.2mS (2.38092mΩ~138.888Ω)			560.0064S~9.6mS (1.78569mΩ~104.166Ω)			700.008S~12mS (1.42855mΩ~83.3333Ω)			420.0048S~7.2mS (2.38092mΩ~138.888Ω)			700.008S~12mS (1.42855mΩ~83.3333Ω)			980.0112S~16.8mS (1.02039mΩ~59.5238Ω)			1260.0144S~21.6mS (793.641μΩ~46.2963Ω)			
			M	28.00032S~480μS (35.7138mΩ~2083.33Ω)			42.00048S~720μS (23.8092mΩ~1388.88Ω)			56.00064S~960μS (17.8569mΩ~1041.66Ω)			70.0008S~1.2mS (14.2855mΩ~833.333Ω)			42.00048S~720μS (23.8092mΩ~1388.88Ω)			70.0008S~1.2mS (14.2855mΩ~833.333Ω)			98.00112S~1.68mS (10.2039mΩ~595.238Ω)			126.00144S~2.16mS (7.93641mΩ~462.963Ω)		
				L	2.800032S~48μS (357.138mΩ~20.8333kΩ)			4.200048S~72μS (238.092mΩ~13.8888kΩ)			5.600064S~96μS (178.569mΩ~10.4166kΩ)			7.00008S~120μS (142.855mΩ~8.33333kΩ)			N/A			N/A			N/A			N/A	
Accuracy of Setting	H,M,L	$\pm(0.5\% \text{ of set}^* + 0.5\% \text{ of f.s.}^*) + \text{Vin}^*/(500/\text{N k}\Omega)$																									
Resolution	H,M,L	4.8mS	480μS	48μS	7.2mS	720μS	72μS	9.6mS	960μS	96μS	12mS	1.2mS	120μS	7.2mS	720μS	–	12mS	1.2mS	–	16.8mS	1.68mS	–	21.6mS	2.16mS	–		
CONSTANT VOLTAGE MODE																											
Operating Range	Range	H	1.5V~150V																								
		L	1.5V~15V																								
Accuracy of Setting	H,L	$\pm(0.1\% \text{ of set} + 0.1\% \text{ of f.s.})$																									
Resolution	H,L	10mV/1mV																									
CONSTANT POWER MODE																											
Operating Range	Range	H	210W~2100W			315W~3150W			420W~4200W			525W~5250W			315W~3150W			525W~5250W			735W~7350W			945W~9450W			
			M	21W~210W			31.5W~315W			42W~420W			52.5W~525W			31.5W~315W			52.5W~525W			93.5W~735W			94.5W~945W		
				L	2.1W~21W			3.15W~31.5W			4.2W~42W			5.25W~52.5W			N/A			N/A			N/A			N/A	
Accuracy of Setting	H,M,L	$\pm(0.6\% \text{ of set} + 1.4\% \text{ of f.s.}^*) + \text{Vin} \times \text{Vin} / (500/\text{N M}\Omega)$ : alone operation specifications																									
Resolution	H,M,L	200mW	20mW	2mW	300mW	30mW	3mW	400mW	40mW	4mW	500mW	50mW	5mW	300mW	30mW	–	500mW	50mW	–	700mW	70mW	–	900mW	90mW	–		
PARALLEL Mode																											
Capacity	–																										
SLEW RATE																											
Operation Mode	CC, CR																										
Setting Range (CC mode)	Range	H	32mA/μs~16A/μs			48mA/μs~16A/μs			64mA/μs~16A/μs			80mA/μs~16A/μs			48mA/μs~16A/μs			80mA/μs~16A/μs			112mA/μs~16A/μs			144mA/μs~16A/μs			
			M	3.2mA/μs~1.6A/μs			4.8mA/μs~1.6A/μs			6.4mA/μs~1.6A/μs			8mA/μs~1.6A/μs			4.8mA/μs~1.6A/μs			8mA/μs~1.6A/μs			11.2mA/μs~1.6A/μs			14.4mA/μs~1.6A/μs		
				L	320μA/μs~160mA/μs			480μA/μs~160mA/μs			640μA/μs~160mA/μs			800μA/μs~160mA/μs			N/A			N/A			N/A			N/A	
Setting Range (CR Mode)	Range	H	3.2mA/μs~1.6A/μs			4.8mA/μs~1.6A/μs			6.4mA/μs~1.6A/μs			8mA/μs~1.6A/μs			4.8mA/μs~1.6A/μs			8mA/μs~1.6A/μs			11.2mA/μs~1.6A/μs			14.4mA/μs~1.6A/μs			
			M	320μA/μs~160mA/μs			480μA/μs~160mA/μs			640μA/μs~160mA/μs			800μA/μs~160mA/μs			480μA/μs~160mA/μs			800μA/μs~160mA/μs			11.2mA/μs~160mA/μs			14.4mA/μs~160mA/μs		
				L	32μA/μs~16mA/μs			48μA/μs~16mA/μs			64μA/μs~16mA/μs			80μA/μs~16mA/μs			N/A			N/A			N/A			N/A	
Accuracy of Setting	H,M,L	$\pm(10\% \text{ of set}^* + 5\mu\text{s})$																									
Resolution	12mA(1.6A~16A/μs)			18mA(1.6A~16A/μs)			24mA/μs(1.6A~16A/μs)			30mA(1.6A~16A/μs)			18mA(1.6A~16A/μs)			30mA(1.6A~16A/μs)			42mA(1.6A~16A/μs)			54mA(1.6A~16A/μs)					
	1.2mA(160mA~1.6A/μs)			1.8mA(160mA~1.6A/μs)			2.4mA/μs(160mA~1.6A/μs)			3mA(160mA~1.6A/μs)			1.8mA(160mA~1.6A/μs)			3mA(160mA~1.6A/μs)			4.2mA(160mA~1.6A/μs)			5.4mA(160mA~1.6A/μs)					
	120μA(16mA~160mA/μs)			180μA(16mA~160mA/μs)			240μA/μs(16mA~160mA/μs)			300μA(16mA~160mA/μs)			180μA(16mA~160mA/μs)			300μA(16mA~160mA/μs)			420μA(16mA~160mA/μs)			540μA(16mA~160mA/μs)					
	12μA(1.6mA~16mA/μs)			18μA(1.6mA~16mA/μs)			24μA/μs(1.6mA~16mA/μs)			30μA(1.6mA~16mA/μs)			18μA(1.6mA~16mA/μs)			30μA(1.6mA~16mA/μs)			42μA(1.6mA~16mA/μs)			54μA(1.6mA~16mA/μs)					
	1.2μA(160μA~1.6mA/μs)			1.800μA(160μA~1.6mA/μs)			2.4μA/μs(160μA~1.6mA/μs)			3μA(160μA~1.6mA/μs)			1.8μA(160μA~1.6mA/μs)			3μA(160μA~1.6mA/μs)			4.2μA(160μA~1.6mA/μs)			5.4μA(160μA~1.6mA/μs)					
	120nA(16μA~160μA/μs)			180nA(16μA~160μA/μs)			240nA/μs(16μA~160μA/μs)			300nA(16μA~160μA/μs)			N/A			N/A			N/A			N/A					
METER																											
Voltmeter	Accuracy	$\pm(0.1\% \text{ of rdg} + 0.1\% \text{ of f.s.})$																									
Ammeter	Accuracy	$\pm(0.2\% \text{ of rdg} + 0.3\% \text{ of f.s.})$																									
DYNAMIC MODE																											
Operation Mode	CC and CR																										
T1 & T2 Accuracy	0.025mS~10mS/Res : 1μs ; 1mS~30S/Res : 1mS 1μS/1ms ± 100ppm																										
Slew Rate (CC Mode)	Range	H	48mA/μs~16A/μs			64mA/μs~16A/μs			80mA/μs~16A/μs			48mA/μs~16A/μs			80mA/μs~16A/μs			112mA/μs~16A/μs			144mA/μs~16A/μs						
			M	3.2mA/μs~1.6mA/μs			4.8mA/μs~1.6mA/μs			6.4mA/μs~1.6mA/μs			8mA/μs~1.6mA/μs			4.8mA/μs~1.6mA/μs			8mA/μs~1.6mA/μs			11.2mA/μs~1.6mA/μs			14.4mA/μs~1.6mA/μs		
				L	320μA/μs~160mA/μs			480μA/μs~160mA/μs			640μA/μs~160mA/μs			800μA/μs~160mA/μs			N/A			N/A			N/A			N/A	
Slew Rate (CR Mode)	Range	H	3.2mA/μs~1.6A/μs			4.8mA/μs~1.6A/μs			6.4mA/μs~1.6A/μs			8mA/μs~1.6A/μs			4.8mA/μs~1.6A/μs			8mA/μs~1.6A/μs			11.2mA/μs~1.6A/μs			14.4mA/μs~1.6A/μs			
			M	320μA/μs~160mA/μs			480μA/μs~160mA/μs			640μA/μs~160mA/μs			800μA/μs~160mA/μs			480μA/μs~160mA/μs			800μA/μs~160mA/μs			11.2mA/μs~160mA/μs			14.4mA/μs~160mA/μs		
				L	32μA/μs~16mA/μs			48μA/μs~16mA/μs			64μA/μs~16mA/μs			80μA/μs~16mA/μs			N/A			N/A			N/A			N/A	
Current Accuracy	±0.4%F.S.																										
PROTECTION FUNCTION																											
Functions	Overvoltage protection(OVP), Overcurrent protection(OCP), Overpower protection(OPP), Overheat protection(OHP), Undervoltage protection(UVP), Reverse connection protection(REV)																										
GENERAL																											
Input Range	90VAC~132VAC/180VAC~250VAC Single-phase; 47Hz~63Hz																										
Power(Max.)	380VA			570VA			760VA			950VA			420VA			650VA			880VA			1110VA					
Interface	USB/RS232/Analog Control (Standard) ; GPIB/LAN(Optional)																										
Dimensions & Weight	598(W)x877(H)x706(D)mm; Approx. 67.5kg			598(W)x877(H)x706(D)mm; Approx. 85.5kg			598(W)x877(H)x706(D)mm; Approx. 110kg			598(W)x877(H)x706(D)mm; Approx. 127.5kg			598(W)x877(H)x706(D)mm; Approx. 73kg			598(W)x877(H)x706(D)mm; Approx. 96.5kg			598(W)x877(H)x706(D)mm; Approx. 125kg			598(W)x877(H)x706(D)mm; Approx. 149kg					

## SPECIFICATIONS

Model	PEL-3021H			PEL-3041H			PEL-3111H			PEL-3211H			
Voltage	0V~800V			0V~800V			0V~800V			0V~800V			
Current	8.75A			17.5A			52.5A			105A			
Power	175W			350W			1050W			2100W			
Input Resistance	3.24MΩ			3.24MΩ			3.24MΩ			3.24MΩ			
Min. Operating Voltage(DC)(Typ.)	5V@8.75A 2.5V@4.375A			5V@17.5A 2.5V@8.75A			5V@52.5A 2.5V@26.25A			5V@105A 2.5V@52.5A			
<b>CONSTANT CURRENT MODE</b>													
Operating Range	H, M, L	0~8.75A   0~875mA   0~87.5mA			0~17.5A   0~1.75A   0~175mA			0~52.5A   0~5.25A   0~525mA			0~105A   0~10.5A   0~1.05A		
Accuracy of Setting	H, M	$\pm(0.2\% \text{ of set} + 0.1\% \text{ of f.s.}^{*1}) + \text{Vin}^2/3.24\text{M}\Omega$									$\pm(1.2\% \text{ of set} + 1.1\% \text{ of f.s.})$		
Accuracy of Setting	L	$\pm(0.2\% \text{ of set} + 0.1\% \text{ of f.s.}^{*1}) + \text{Vin}^2/3.24\text{M}\Omega$									N/A		
Accuracy of Setting(Parallel)		$\pm(1.2\% \text{ of set} + 1.1\% \text{ of f.s.}^{*1})$									N/A		
Resolution	H, M, L	300μA	30μA	3μA	0.6mA	60μA	6μA	2mA	200μA	20μA	N/A		
<b>CR MODE</b>													
Operating Range	Range	H	1.75S~30μS (571mΩ~33.3kΩ)			3.5S~60μS (285mΩ~16.6kΩ)			10.5S~180μS (95.2mΩ~5.55kΩ)			21S~360μS (47.6mΩ~2.777kΩ)	
		M	175mS~3μS (5.71Ω~333kΩ)			350mS~6μS (2.85Ω~166kΩ)			1.05S~18μS (952mΩ~55.5kΩ)			2.1S~36μS (476mΩ~27.77kΩ)	
		L	17.5mS~0.3μS (57.1Ω~3.33MΩ)			35mS~0.6μS (28.5Ω~1.66MΩ)			105mS~1.8μS (9.52Ω~555kΩ)			210mS~3.6μS (4.762Ω~277.7kΩ)	
Accuracy of Setting	H, M	$\pm(0.5\% \text{ set} + 0.5\% \text{ f.s.}^{*1}) + \text{Vin}^2/3.24\text{M}\Omega$									$\pm(1.2\% \text{ of set} + 1.1\% \text{ of f.s.})$ TYP		
Accuracy of Setting	L	$\pm(0.5\% \text{ set} + 0.5\% \text{ f.s.}^{*1}) + \text{Vin}^2/3.24\text{M}\Omega$									N/A		
Parallel		$\pm(1.2\% \text{ of set} + 1.1\% \text{ of f.s.}^{*1})$									N/A		
Resolution	H, M, L	30μS	3μS	0.3μS	60μS	6μS	0.6μS	180μS	18μS	1.8μS	N/A		
<b>CONSTANT VOLTAGE MODE</b>													
Operating Range	Range	H	5V~800V									5V~800V	
		L	5V~80V									5V~80V	
Accuracy of Setting	Range	H, L	$\pm(0.2\% \text{ of set} + 0.2\% \text{ of f.s.})$									$\pm(0.2\% \text{ of set} + 0.2\% \text{ of f.s.})$	
	Parallel	TYP	$\pm(0.2\% \text{ of set} + 0.2\% \text{ of f.s.})$									$\pm(0.2\% \text{ of set} + 0.2\% \text{ of f.s.})$	
Resolution	Range	H, L	20mV/2mV									N/A	
<b>CONSTANT POWER MODE</b>													
Operating Range	Range	H	17.5W~175W			35W~350W			105W~1050W			210W~2100W	
		M	1.75W~17.5W			3.5W~35W			10.5W~105W			21W~210W	
		L	0.175W~1.75W			0.35W~3.5W			1.05W~10.5W			2.1W~21W	
Accuracy of Setting	H, M	$\pm(0.6\% \text{ of set} + 1.4\% \text{ of f.s.}) + \text{Vin}/3.24\text{M}\Omega$									$\pm(5\% \text{ of f.s.})$ TYP		
Resolution	H, M, L	10mW	1mW	0.1mW	10mW	1mW	0.1mW	100mW	10mW	1mW	N/A		
<b>PARALLEL Mode</b>													
Capacity		875W			1750W			5250W			PEL-3111H with 4 booster units : Max 9.45kW		
<b>SLEW RATE</b>													
Operation Mode		CC, CR			CC, CR			CC, CR			N/A		
Setting Range (CC mode)	Range	H	0.14mA/μs~140mA/μs			0.280mA/μs~280.0mA/μs			0.840mA/μs~840mA/μs			N/A	
		M	0.014mA/μs~14mA/μs			0.0280mA/μs~28.00mA/μs			0.0840mA/μs~84.00mA/μs			N/A	
		L	1.4μA/μs~1400μA/μs			2.80μA/μs~2800μA/μs			0.00840mA/μs~8.400mA/μs			N/A	
Setting Range (CR Mode)	Range	H	0.014mA/μs~14mA/μs			0.0280mA/μs~28.00mA/μs			0.0840mA/μs~84.00mA/μs			N/A	
		M	0.0014mA/μs~1.4mA/μs			0.00280mA/μs~2.800mA/μs			0.00840mA/μs~8.400mA/μs			N/A	
		L	0.14μA/μs~140μA/μs			0.280μA/μs~280.0μA/μs			0.000840mA/μs~0.8400mA/μs			N/A	
Accuracy of Setting	H, M, L	$\pm(10\% \text{ of set} + 25\mu\text{s})$									N/A		
Resolution		50μA(14mA~140mA/μs) 5μA(1.4mA~14mA/μs) 0.5μA(140μA~1.4mA/μs) 50nA(14μA~140μA/μs) 5nA(1.4μA~14μA/μs) 0.5nA(0.14μA~1.4μA/μs)			100μA(28mA~280mA/μs) 10μA(2.8mA~28mA/μs) 1μA(280μA~2.8mA/μs) 0.1μA(28μA~280μA/μs) 10nA(2.8μA~28μA/μs) 1nA(0.28μA~2.8μA/μs)			300μA(84mA~0.84A/μs) 30μA(8.4mA~84mA/μs) 3μA(840μA~8.4mA/μs) 0.3μA(84μA~840μA/μs) 30nA(8.4μA~84μA/μs) 3nA(0.84μA~8.4μA/μs)			N/A		
<b>METER</b>													
Voltmeter	Accuracy	$\pm(0.1\% \text{ of rdg} + 0.1\% \text{ of f.s.})$									$\pm(0.1\% \text{ of rdg} + 0.1\% \text{ of f.s.})$ TYP		
Ammeter	Accuracy	$\pm(0.2\% \text{ of rdg} + 0.3\% \text{ of f.s.})$									N/A		
Ammeter(Parallel Operation)	Accuracy	$\pm(1.2\% \text{ of rdg} + 1.1\% \text{ of f.s.})$									$\pm(1.2\% \text{ of rdg} + 1.1\% \text{ of f.s.})$ TYP		
<b>DYNAMIC MODE</b>													
Operation Mode		CC, CR, CP									N/A		
T1 & T2 Accuracy		0.025mS~10mS/Res : 1μs ; 10ms~30s/Res : 1ms $\pm 100\text{ppm}$ of setting									N/A $\pm 100\text{ppm}$ of setting		
Slew Rate (CC Mode)	Range	H	0.140mA/μs~140.0mA/μs			0.280mA/μs~280.0mA/μs			0.840mA/μs~840.0mA/μs			N/A	
		M	0.014mA/μs~14.00mA/μs			0.028mA/μs~28.00mA/μs			0.084mA/μs~84.00mA/μs			N/A	
		L	1.400μA/μs~1400.0μA/μs			2.800μA/μs~2800μA/μs			0.0084mA/μs~8.400mA/μs			N/A	
Slew Rate (CR Mode)	Range	H	0.014mA/μs~14.000mA/μs			0.028mA/μs~28.00mA/μs			0.084mA/μs~84.00mA/μs			N/A	
		M	0.0014mA/μs~1.4000mA/μs			2.8μA/μs~2.800mA/μs			0.0084mA/μs~8.400mA/μs			N/A	
		L	0.1400μA/μs~140.00μA/μs			0.280μA/μs~280.0μA/μs			0.00084mA/μs~0.8400mA/μs			N/A	
Current Accuracy		$\pm 0.4\% \text{ F.S.}$									$\pm 0.4\% \text{ F.S.}$		
<b>PROTECTION FUNCTION</b>													
Functions		Overvoltage protection(OVP), Overcurrent protection(OCP), Overpower protection(OPP), Overheat protection(OHP), Undervoltage protection(UVP), Reverse connection protection(REV)											
<b>GENERAL</b>													
Input Range		90VAC~132VAC/180VAC~250VAC Single-phase; 47Hz~63Hz											
Power(Max.)		90VA			110VA			190VA			230VA		
Interface		Std : USB/RS232/Analog Control ; Opt : GPIB/LAN											
Dimensions & Weight		213.8(W)x124(H)x400.5(D)mm; Approx. 6kg			213.8(W)x124(H)x400.5(D)mm; Approx. 7kg			427.8(W)x124(H)x400.5(D)mm; Approx. 17kg			427.7(W)x127.8(H)x553.5(D)mm; Approx. 23kg		



## SPECIFICATIONS

SPECIFICATIONS																										
Model	PEL-3212H			PEL-3323H			PEL-3424H			PEL-3535H			PEL-3322H			PEL-3533H			PEL-3744H			PEL-3955H				
<b>Voltage</b>	0V~800V			0V~800V			0V~800V			0V~800V			0V~800V			0V~800V			0V~800V			0V~800V				
<b>Current</b>	0~105A			0~157.5A			0~210A			0~262.5A			0~157.5A			0~262.5A			0~367.5A			0~472.5A				
<b>Power</b>	2100W			3150W			4200W			5250W			3150W			5250W			7350W			9450W				
<b>Input Resistance</b>	1.62MΩ			1.08MΩ			0.81MΩ			0.648MΩ			3.24MΩ			3.24MΩ			3.24MΩ			3.24MΩ				
<b>Min. Operating Voltage(DC)(Typ.)</b>	2.5V@52.5A			2.5V@78.75A			2.5V@105A			2.5V@131.25A			2.5V@78.75A			2.5V@131.25A			2.5V@183.75A			2.5V@236.25A				
CONSTANT CURRENT MODE																										
<b>Operating Range</b>	<b>H, M, L</b>	0~105A	0~10.5A	0~1.05A	0~157.5A	0~15.75A	0~1.575A	0~210A	0~21A	0~2.1A	0~262.5A	0~26.25A	0~2.625A	0~157.5A	0~15.75A	0~1.575A	0~262.5A	0~26.25A	0~2.625A	0~367.5A	0~36.75A	0~3.675A	0~472.5A	0~47.25A	0~4.725A	
<b>Accuracy of Setting</b>	<b>H, M, L</b>	±(0.2% of set + 0.1% of f.s. <sup>1)</sup> + Vin <sup>2</sup> / (3.24 / N MΩ) <sup>3</sup>												±(1.2% of set + 1.1% of f.s. <sup>1)</sup> + Vin <sup>2</sup> / 3.24MΩ <sup>3</sup>												
<b>Resolution</b>	<b>H, M, L</b>	4mA	0.4mA	0.04mA	6mA	0.6mA	0.06mA	8mA	0.8mA	0.08mA	10mA	1mA	0.1mA	6mA	0.6mA	0.06mA	10mA	1mA	0.1mA	14mA	1.4mA	0.14mA	18mA	1.8mA	0.18mA	
CR MODE																										
<b>Operating Range<sup>4</sup></b>	<b>Range</b>	<b>H</b>	21S~360μS (47.619mΩ~ 2.778kΩ)			31.5S~540μS (31.746mΩ~ 1.85185kΩ)			42S~0.72mS (23.8095mΩ~ 1.3889kΩ)			52.5S~0.9mS (19.0476mΩ~ 1.11111kΩ)			31.5S~540μS (31.746mΩ~ 1.85185kΩ)			52.5S~0.9mS (19.0476mΩ~ 1.11111kΩ)			73.5S~1.26mS (13.6054mΩ~ 793.651Ω)			94.5S~1.26mS (10.582mΩ~ 617.284Ω)		
		<b>M</b>	2.1S~36μS (476.19mΩ~ 27.778kΩ)			3.15S~540μS (317.46mΩ~ 18.5185kΩ)			4.2S~0.72mS (238.095mΩ~ 13.8889kΩ)			5.25S~0.9mS (190.476mΩ~ 11.1111kΩ)			3.15S~540μS (317.46mΩ~ 18.5185kΩ)			5.25S~90μS (190.476mΩ~ 11.1111kΩ)			7.35S~126μS (136.054mΩ~ 7.93651kΩ)			9.45S~126μS (105.82mΩ~ 6.17284kΩ)		
		<b>L</b>	210mS~3.6μS (4.7619Ω~ 277.78kΩ)			315mS~540μS (3.1746Ω~ 185.185kΩ)			420mS~0.72mS (2.38095Ω~ 138.888kΩ)			525mS~0.9mS (1.90476Ω~ 111.111kΩ)			315mS~540μS (3.1746Ω~ 185.185kΩ)			525mS~9μS (1.90476Ω~ 111.111kΩ)			735mS~12.6μS (1.36054Ω~ 79.365kΩ)			945mS~162μS (1.0582Ω~ 61.7284kΩ)		
<b>Accuracy of Setting<sup>5</sup></b>	<b>H, M, L</b>	±(0.5% of set <sup>6</sup> + 0.5% of f.s. <sup>1)</sup> + Vin <sup>2</sup> / (3.24 / N MΩ) : Alone operation specifications																								
<b>Resolution</b>		360μS	36μS	3.6μS	540μS	54μS	5.4μS	720μS	72μS	7.2μS	900μS	90μS	9μS	540μS	54μS	5.4μS	900μS	90μS	9μS	1.26mS	126μS	12.6μS	1.62mS	162μS	16.2μS	
CONSTANT VOLTAGE MODE																										
<b>Operating Range</b>	<b>Range</b>	<b>H</b>	5V~800V																							
		<b>L</b>	5V~80V																							
<b>Accuracy of Setting<sup>7</sup></b>	<b>Range</b>	<b>H, L</b>	±(0.2% of set + 0.2% of f.s.)																							
<b>Resolution</b>	<b>Range</b>	<b>H, L</b>	20mV/2mV																							
CONSTANT POWER MODE																										
<b>Operating Range</b>	<b>Range</b>	<b>H</b>	0W~2100W			0W~3150W			0W~4200W			0W~5250W			0W~3150W			0W~5250W			0W~7350W			0W~9450W		
		<b>M</b>	0W~210W			0W~315W			0W~420W			0W~525W			0W~315W			0W~525W			0W~735W			0W~945W		
		<b>L</b>	0W~21W			0W~31.5W			0W~42W			0W~52.5W			0W~31.5W			0W~52.5W			0W~73.5W			0W~94.5W		
<b>Accuracy of Setting<sup>8</sup></b>	<b>H, M, L</b>	±(0.6% of set + 1.4% of f.s. <sup>1)</sup> + Vin x Vin <sup>3</sup> / (3.24 / N MΩ) : Alone operation specifications																								
<b>Resolution</b>		200mW	20mW	2mW	300mW	30mW	3mW	400mW	40mW	4mW	500mW	50mW	5mW	300mW	30mW	3mW	500mW	50mW	5mW	700mW	70mW	7mW	900mW	90mW	9mW	
PARALLEL Mode																										
<b>Capacity</b>		-																								
SLEW RATE																										
<b>Operation Mode</b>		CC, CR																								
<b>Setting Range (CC mode)</b>	<b>Range</b>	<b>H</b>	1.68mA/μs~840mA/μs			2.52mA/μs~839.7mA/μs			3.36mA/μs~840mA/μs			4.2mA/μs~840mA/μs			2.52mA/μs~839.7mA/μs			4.2mA/μs~840mA/μs			5.88mA/μs~840mA/μs			7.56mA/μs~839.7mA/μs		
		<b>M</b>	168μA/μs~84mA/μs			252μA/μs~83.97mA/μs			336μA/μs~84mA/μs			420μA/μs~84mA/μs			252μA/μs~83.97mA/μs			420μA/μs~84mA/μs			588μA/μs~84mA/μs			756μA/μs~83.97mA/μs		
		<b>L</b>	16.8μA/μs~8.4mA/μs			25.2μA/μs~8.397mA/μs			33.6μA/μs~8.4mA/μs			42μA/μs~8.4mA/μs			25.2μA/μs~8.397mA/μs			42μA/μs~8.4mA/μs			58.8μA/μs~8.4mA/μs			75.6μA/μs~8.397mA/μs		
<b>Setting Range (CR Mode)</b>	<b>Range</b>	<b>H</b>	168μA/μs~84mA/μs			252μA/μs~83.97mA/μs			336μA/μs~84mA/μs			420μA/μs~84mA/μs			252μA/μs~83.97mA/μs			420μA/μs~84mA/μs			588μA/μs~84mA/μs			756μA/μs~83.97mA/μs		
		<b>M</b>	16.8μA/μs~8.4mA/μs			25.2μA/μs~8.397mA/μs			33.6μA/μs~8.4mA/μs			42μA/μs~8.4mA/μs			25.2μA/μs~8.397mA/μs			42μA/μs~8.4mA/μs			58.8μA/μs~8.4mA/μs			75.6μA/μs~8.397mA/μs		
		<b>L</b>	1.68μA/μs~840μA/μs			2.52μA/μs~839.7μA/μs			3.36μA/μs~840μA/μs			4.2μA/μs~840μA/μs			2.52μA/μs~839.7μA/μs			4.2μA/μs~840μA/μs			5.88μA/μs~840μA/μs			7.56μA/μs~839.7μA/μs		
<b>Accuracy of Setting<sup>9</sup></b>	<b>H, M, L</b>	±(10% of set + 25μs)																								
<b>Resolution</b>		600μA(1.68mA~840mA/μs) 60μA(16.8mA~84mA/μs) 6μA(1.68mA~8.4mA/μs) 600nA(0.1680mA~84mA/μs) 60nA(0.01680mA~8.4mA/μs) 6nA(0.00168mA~0.84mA/μs)			900μA(252mA~839.7mA/μs) 90μA(25.2mA~83.97mA/μs) 9μA(2.52mA~8.397mA/μs) 900nA(252nA~83.97mA/μs) 90nA(25.2μA~8.397mA/μs) 9nA(2.52μA~0.8397μA/μs)			1.2mA(336mA~840mA/μs) 120μA(33.6mA~84mA/μs) 12μA(3.36mA~8.4mA/μs) 1.2μA(336μA~84mA/μs) 120nA(33.6μA~8.4mA/μs) 12nA(3.36μA~0.84mA/μs)			1.5mA(420mA~840mA/μs) 150μA(42mA~84mA/μs) 15μA(4.2mA~8.4mA/μs) 1.5μA(420μA~84mA/μs) 150nA(42μA~8.4mA/μs) 15nA(4.2μA~0.84mA/μs)			900μA(252mA~839.7mA/μs) 90μA(25.2mA~83.97mA/μs) 9μA(2.52mA~8.397mA/μs) 900nA(252nA~83.97mA/μs) 90nA(25.2μA~8.397mA/μs) 9nA(2.52μA~0.8397mA/μs)			1.5mA(420mA~840mA/μs) 150μA(42mA~84mA/μs) 15μA(4.2mA~8.4mA/μs) 1.5μA(420μA~84mA/μs) 150nA(42μA~8.4mA/μs) 15nA(4.2μA~0.84mA/μs)			2.1mA(588mA~840mA/μs) 210μA(58.8mA~84mA/μs) 21μA(5.88mA~8.4mA/μs) 2.1μA(588μA~84mA/μs) 210nA(58.8μA~8.4mA/μs) 21nA(5.88μA~0.84mA/μs)			2.7mA(756mA~839.7mA/μs) 270μA(75.6mA~83.97mA/μs) 27μA(7.56mA~8.397mA/μs) 2.7μA(756μA~83.97mA/μs) 270nA(75.6μA~8.397mA/μs) 27nA(7.56μA~0.8397mA/μs)			
	METER																									
	<b>Voltmeter</b>	<b>Accuracy</b>	±(0.1% of rdg + 0.1% of f.s)																							
		<b>Ammeter Accuracy</b>	±(1.2% of rdg + 1.1% of f.s)																							
	DYNAMIC MODE																									
	<b>Operation Mode T1 &amp; T2 Accuracy</b>		CC and CR 0.025mS~10mS/Res : 1μs ; 10mS~30S/Res : 1mS 1μS/1ms ± 100ppm																							
<b>Slew Rate (CC Mode)</b>	<b>Range</b>	<b>H</b>	1.68mA/μs~840mA/μs			2.52mA/μs~839.7mA/μs			3.36mA/μs~840mA/μs			4.2mA/μs~840mA/μs			2.52mA/μs~839.7mA/μs			4.2mA/μs~840mA/μs			5.88mA/μs~840mA/μs			7.56mA/μs~839.7mA/μs		
		<b>M</b>	168μA/μs~84mA/μs			252μA/μs~83.97mA/μs			336μA/μs~84mA/μs			420μA/μs~84mA/μs			252μA/μs~83.97mA/μs			420μA/μs~84mA/μs			588μA/μs~84mA/μs			756μA/μs~83.97mA/μs		
		<b>L</b>	16.8μA/μs~8.4mA/μs			25.2μA/μs~8.397mA/μs			33.6μA/μs~8.4mA/μs			42μA/μs~8.4mA/μs			25.2μA/μs~8.397mA/μs			42μA/μs~8.4mA/μs			58.8μA/μs~8.4mA/μs			75.6μA/μs~8.397mA/μs		
<b>Slew Rate (CR Mode)</b>	<b>Range</b>	<b>H</b>	168μA/μs~8.4mA/μs			252μA/μs~83.97mA/μs			336μA/μs~84mA/μs			420μA/μs~84mA/μs			252μA/μs~83.97mA/μs			420μA/μs~84mA/μs			588μA/μs~84mA/μs			756μA/μs~83.97mA/μs		
		<b>M</b>	16.8μA/μs~8.4mA/μs			25.2μA/μs~8.397mA/μs			33.6μA/μs~8.4mA/μs			42μA/μs~8.4mA/μs			25.2μA/μs~8.397mA/μs			42μA/μs~8.4mA/μs			58.8μA/μs~8.4mA/μs			75.6μA/μs~8.397mA/μs		
		<b>L</b>	1.68μA/μs~840μA/μs			2.52μA/μs~839.7μA/μs			3.36μA/μs~840μA/μs			4.2μA/μs~840μA/μs			2.52μA/μs~839.7μA/μs			4.2μA/μs~840μA/μs			5.88μA/μs~840μA/μs			7.56μA/μs~839.7μA/μs		
<b>Current Accuracy</b>		±0.4%F.S.																								
PROTECTION FUNCTION																										
<b>Functions</b>		Overvoltage protection(OVP), Overcurrent protection(OCP), Overpower protection(OPP), Overheat protection(OHP), Undervoltage protection(UVP), Reverse connection protection(REV)																								
GENERAL																										
<b>Input Range</b>		90VAC~132VAC/180VAC~250VAC Single-phase; 47Hz~63Hz																								
<b>Power(Max.)</b>		380VA			570VA			760VA			950VA			420VA			650VA			880VA			1110VA			
<b>Interface</b>		Std : USB/RS232/Analog Control ; Opt. : GPIB/LAN																								
<b>Dimensions &amp; Weight</b>		598(W)x877(H)x706(D)mm; Approx. 67.5kg			598(W)x877(H)x706(D)mm; Approx. 85.5kg			598(W)x877(H)x706(D)mm; Approx. 110kg			598(W)x877(H)x706(D)mm; Approx. 127.5kg			598(W)x877(H)x706(D)mm; Approx. 73kg			598(W)x877(H)x706(D)mm; Approx. 96.5kg			598(W)x877(H)x706(D)mm; Approx. 125kg			598(W)x877(H)x706(D)mm; Approx. 149kg			



Note: \*1. Full scale of H range

\*2. Vin: input terminal voltage of electronic load

\*3. M range applies to the full scale of H range

\*4. Siemens[S] = Input current[A] / Input voltage[V] = 1/resistance[Ω]

\*5. Converted value at the input current. At the input current. It is not applied for the condition of the parallel operation.

\*6. set = Vin/Rset

\*7. At the sensing point during remote sensing under the operating range of the input voltage. It is also applied for the condition of the parallel operation.

\*8. It is not applied for the condition of the parallel operation.

\*9. Time to reach from 10 % to 90 % when the current is varied from 2 % to 100 % ( 20 % to 100 % in M range ) of the rated current.

\*10. N = Number of units in parallel ( same model )

\*11. N = Number of units in parallel ( same model ) or N = 1 + 2 x ( Number of units in parallel [PEL-3211] )

## ORDERING INFORMATION

<b>PEL-3021</b>	(150V/35A/175W) Single-Channel Programmable D.C. Electronic Load
<b>PEL-3041</b>	(150V/70A/350W) Single-Channel Programmable D.C. Electronic Load
<b>PEL-3111</b>	(150V/210A/1050W) Single-Channel Programmable D.C. Electronic Load
<b>PEL-3211</b>	(150V/420A/2100W) 2100W Booster for PEL-3111 only
<b>PEL-3212</b>	(150V/420A/2100W) Single-Channel Programmable D.C. Electronic Load
<b>PEL-3322</b>	(150V/630A/3150W) Single-Channel Programmable D.C. Electronic Load
<b>PEL-3323</b>	(150V/630A/3150W) Single-Channel Programmable D.C. Electronic Load
<b>PEL-3424</b>	(150V/840A/4200W) Single-Channel Programmable D.C. Electronic Load
<b>PEL-3533</b>	(150V/1050A/5250W) Single-Channel Programmable D.C. Electronic Load
<b>PEL-3535</b>	(150V/1050A/5250W) Single-Channel Programmable D.C. Electronic Load
<b>PEL-3744</b>	(150V/1470A/7350W) Single-Channel Programmable D.C. Electronic Load
<b>PEL-3955</b>	(150V/1890A/9450W) Single-Channel Programmable D.C. Electronic Load
<b>PEL-3021H</b>	(800V/8.75A/175W) Single-Channel Programmable D.C. Electronic Load
<b>PEL-3041H</b>	(800V/17.5A/350W) Single-Channel Programmable D.C. Electronic Load
<b>PEL-3111H</b>	(800V/52.5A/1050W) Single-Channel Programmable D.C. Electronic Load
<b>PEL-3211H</b>	(800V/105A/2100W) 2100W Booster for PEL-3111H only
<b>PEL-3212H</b>	(800V/105A/2100W) Single-Channel Programmable D.C. Electronic Load
<b>PEL-3322H</b>	(800V/157.5A/3150W) Single-Channel Programmable D.C. Electronic Load
<b>PEL-3323H</b>	(800V/157.5A/3150W) Single-Channel Programmable D.C. Electronic Load
<b>PEL-3424H</b>	(800V/210A/4200W) Single-Channel Programmable D.C. Electronic Load
<b>PEL-3533H</b>	(800V/262.5A/5250W) Single-Channel Programmable D.C. Electronic Load
<b>PEL-3535H</b>	(800V/262.5A/5250W) Single-Channel Programmable D.C. Electronic Load
<b>PEL-3744H</b>	(800V/367.5A/7350W) Single-Channel Programmable D.C. Electronic Load
<b>PEL-3955H</b>	(800V/472.5A/9450W) Single-Channel Programmable D.C. Electronic Load

## ACCESSORIES

Quick Start Guide

CD (User Manual/Programming Manual)

Power Cord

**PEL-011** Load Input Terminal Cover

**PEL-012** Terminal Fittings Kits

**PEL-013** Flexible Terminal Cover

**PEL-014** J1/J2 Protection Plug

Front Terminal Washers

**GTL-255** Frame Link Cable 300mm

## OPTIONAL ACCESSORIES

**CR123A** 3V Lithium Battery for Clock.

**GRA-413** Rack Mount Bracket for Booster PEL-3211(H) (EIA+JIS)

**GRA-414-E** Rack Mount Frame for PEL-3021(H), PEL-3041(H), PEL-3111(H)/EIA

**GRA-414-J** Rack Mount Frame for PEL-3021(H), PEL-3041(H), PEL-3111(H)/JIS

**GTL-120** Test Lead (Max. 40A)

**GTL-248** GPIB Cable, 2.0m

**GTL-246** USB Cable Type A- Type B

**PEL-010** Dust Filter

**PEL-004** GPIB Option

**PEL-005** Connect Cu Plate

**PEL-006** Connect Cu Plate

**PEL-007** Connect Cu Plate

**PEL-008** Connect Cu Plate

**PEL-009** Connect Cu Plate

**PEL-018** LAN Card

## FREE DOWNLOAD

**Driver** LabView Driver

Specifications subject to change without notice.

PEL-3000/3000HGD1BH

**PEL-3000 SERIES**



**PEL-3322(H)**



**PEL-3533(H)**




**PEL-3744(H)**



**PEL-3955(H)**



**PEL-3212(H)**

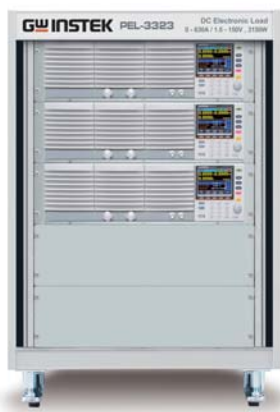

**PEL-3323(H)**



**PEL-3424(H)**



**PEL-3535(H)**

**PEL-005** Connect Cu Plate



**PEL-006** Connect Cu Plate



**PEL-007** Connect Cu Plate



**PEL-008** Connect Cu Plate




**PEL-009** Connect Cu Plate



**PEL-018** LAN Card



**PEL-011** Load Input Terminal Cover




**PEL-012** Terminal Fittings Kits



**PEL-013** Flexible Terminal Cover



**PEL-014** J1/J2 Protection Plug



**GTL-255** Frame Link Cable



**GTL-120** Test Lead

