

# R&S® RT-Zxx HIGH VOLTAGE AND CURRENT PROBES

Specifications



Mess- und Prüftechnik. Die Experten.

Ihr Ansprechpartner /  
Your Partner:

**dataTec AG**

E-Mail: [info@datatec.eu](mailto:info@datatec.eu)

>>> [www.datatec.eu](http://www.datatec.eu)



Specifications | Version 30.00

**ROHDE & SCHWARZ**

Make ideas real



# CONTENTS

|                                                                                   |    |
|-----------------------------------------------------------------------------------|----|
| Definitions.....                                                                  | 4  |
| Probe/oscilloscope chart.....                                                     | 5  |
| R&S®RT-ZH03 high voltage passive probe.....                                       | 8  |
| R&S®RT-ZH10/-ZH11 high voltage passive probes .....                               | 10 |
| R&S®RT-ZI10(C)/-ZI11 isolated probes .....                                        | 13 |
| R&S®RT-ZISO isolated probing system .....                                         | 17 |
| R&S®ZISO-Z1xx probe tip modules .....                                             | 25 |
| R&S®ZISO-Z2xx probe tip modules .....                                             | 27 |
| R&S®ZISO-Z3xx probe tip modules .....                                             | 30 |
| R&S®RT-ZD002/-ZD003 high voltage differential probes (discontinued products)..... | 33 |
| R&S®RT-ZD02/-ZD08 high voltage differential probes (discontinued products).....   | 36 |
| R&S®RT-ZHD07 high voltage differential probe .....                                | 38 |
| R&S®RT-ZHD15/-ZHD16 high voltage differential probe.....                          | 43 |
| R&S®RT-ZHD60 high voltage differential probe .....                                | 47 |
| R&S®RT-ZC02/-ZC03 current probes .....                                            | 51 |
| R&S®RT-ZC05B/-ZC10(B)/-ZC15B/-ZC20(B)/-ZC30 current probes .....                  | 55 |
| R&S®RT-ZC31 current probe.....                                                    | 60 |

R&S®RT-ZA13 probe power supply ..... 63

Ordering information ..... 64

Warranty and service..... 68

## Definitions

### General

Product data applies under the following conditions:

- Three hours of storage at ambient temperature followed by 30 minutes of warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to

### Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$  or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

### Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value, e.g. dimensions or resolution of a setting parameter. Compliance is ensured by design.

### Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

### Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Typical data as well as measured values are not warranted by Rohde & Schwarz.

## Probe/oscilloscope chart

| Base unit             | Probe interface       | R&S®RTC1000 | R&S®RTB 2 | R&S®RTM3000 | R&S®RTA4000 | MXO 3<br>MXO 4<br>MXO 5 | R&S®RTO | R&S®RTP | R&S®RTH | Page |
|-----------------------|-----------------------|-------------|-----------|-------------|-------------|-------------------------|---------|---------|---------|------|
| <b>Passive probes</b> |                       |             |           |             |             |                         |         |         |         |      |
| R&S®RT-ZH03           | BNC, 1 MΩ             | ●           | ●         | ●           | ●           | ●                       | ●       |         |         | 8    |
| R&S®RT-ZH10           | BNC, 1 MΩ,<br>readout | ○           | ○         | ●           | ●           | ●                       | ●       |         |         | 10   |
| R&S®RT-ZH11           |                       | ○           | ○         | ●           | ●           | ●                       | ●       |         |         | 10   |
| R&S®RT-ZI10           |                       |             |           |             |             |                         |         |         | ●       | 13   |
| R&S®RT-ZI10C          |                       |             |           |             |             |                         |         |         | ●       | 13   |
| R&S®RT-ZI11           |                       |             |           |             |             |                         |         |         | ●       | 13   |

| Base unit                  | Probe interface                                     | R&S®RTC1000 | R&S®RTB 2 | R&S®RTM3000 | R&S®RTA4000 | MXO 3<br>MXO 4<br>MXO 5 | R&S®RTO | R&S®RTP | R&S®RTH | Page |
|----------------------------|-----------------------------------------------------|-------------|-----------|-------------|-------------|-------------------------|---------|---------|---------|------|
| <b>Differential probes</b> |                                                     |             |           |             |             |                         |         |         |         |      |
| R&S®RT-ZISO                | Rohde & Schwarz<br>or BNC, 50 $\Omega$ <sup>1</sup> | ○           | ○         | ○           | ○           | ●                       | ●       | ●       | ○       | 17   |
| R&S®RT-ZD002 <sup>2</sup>  | BNC, 1 M $\Omega$                                   | ●           | ●         | ○           | ○           | ○                       | ○       |         |         | 33   |
| R&S®RT-ZD003 <sup>2</sup>  |                                                     | ●           | ●         | ○           | ○           | ○                       | ○       |         |         | 33   |
| R&S®RT-ZD02 <sup>2</sup>   | BNC, 50 $\Omega$ <sup>1</sup>                       | ○           | ○         | ●           | ●           | ●                       | ●       | ●       |         | 36   |
| R&S®RT-ZD08 <sup>2</sup>   |                                                     | ○           | ○         | ●           | ●           | ●                       | ○       | ●       |         | 36   |
| R&S®RT-ZHD07               | Rohde & Schwarz,<br>1 M $\Omega$                    |             |           | ●           | ●           | ●                       | ●       |         |         | 38   |
| R&S®RT-ZHD15               |                                                     |             |           | ●           | ●           | ●                       | ●       |         |         | 43   |
| R&S®RT-ZHD16               |                                                     |             |           | ●           | ●           | ●                       | ●       |         |         | 43   |
| R&S®RT-ZHD60               |                                                     |             |           | ●           | ●           | ●                       | ●       |         |         | 47   |

<sup>1</sup> Probe requires 50  $\Omega$  input coupling. It can be attached to oscilloscopes with 1 M $\Omega$  input coupling using a BNC feedthrough termination adapter.

<sup>2</sup> Discontinued product.

| Base unit             | Probe interface          | R&S®RTC1000 | R&S®RTB 2 | R&S®RTM3000 | R&S®RTA4000 | MXO 3<br>MXO 4<br>MXO 5 | R&S®RTO | R&S®RTP | R&S®RTH | Page |
|-----------------------|--------------------------|-------------|-----------|-------------|-------------|-------------------------|---------|---------|---------|------|
| <b>Current probes</b> |                          |             |           |             |             |                         |         |         |         |      |
| R&S®RT-ZC02           | BNC, 1 MΩ                | ●           | ●         | ○           | ○           | ○                       | ○       |         | ●       | 51   |
| R&S®RT-ZC03           |                          | ●           | ●         | ○           | ○           | ○                       | ○       |         | ●       | 51   |
| R&S®RT-ZC10           |                          | ●           | ●         | ○           | ○           | ○                       | ○       |         | ○       | 55   |
| R&S®RT-ZC20           |                          | ●           | ●         | ○           | ○           | ○                       | ○       |         | ○       | 55   |
| R&S®RT-ZC30           |                          | ●           | ●         | ●           | ●           | ●                       | ●       |         | ○       | 55   |
| R&S®RT-ZC31           |                          | ●           | ●         | ●           | ●           | ●                       | ●       |         | ○       | 60   |
| R&S®RT-ZC05B          | Rohde & Schwarz,<br>1 MΩ |             |           | ●           | ●           | ●                       | ●       |         |         | 55   |
| R&S®RT-ZC10B          |                          |             |           | ●           | ●           | ●                       | ●       |         |         | 55   |
| R&S®RT-ZC15B          |                          |             |           | ●           | ●           | ●                       | ●       |         |         | 55   |
| R&S®RT-ZC20B          |                          |             |           | ●           | ●           | ●                       | ●       |         |         | 55   |


- recommended extra
- possible accessory, with limited functionality of probe or base unit

## R&S®RT-ZH03 high voltage passive probe

All parameters are valid when the probe is connected to an appropriate Rohde & Schwarz oscilloscope with an input impedance of 1 M $\Omega$ . See table on page 5 and Rohde & Schwarz oscilloscope operating manual for more details.

|                                    |                                                      | R&S®RT-ZH03              |
|------------------------------------|------------------------------------------------------|--------------------------|
| <b>Step response</b>               |                                                      |                          |
| Rise time                          | system, 10 % to 90 %                                 | 1.4 ns (meas.)           |
| <b>Frequency response</b>          |                                                      |                          |
| Bandwidth                          | system, -3 dB, starting at DC                        | > 250 MHz (meas.)        |
| <b>Input impedance</b>             |                                                      |                          |
| DC input resistance                | system                                               | 100 M $\Omega$           |
| Input capacitance                  | system                                               | 6.5 pF (meas.)           |
| <b>DC characteristics</b>          |                                                      |                          |
| Attenuation                        | system, automatically corrected on base unit display | 100:1                    |
| Attenuation error                  | probe only, with ideal 1 M $\Omega$ load impedance   | $\pm 2$ % (meas.)        |
| Attenuation voltage coefficient    |                                                      | $\pm 0.0025$ %/V (meas.) |
| <b>Maximum rated input voltage</b> |                                                      |                          |
| Continuous voltage                 | derated, see figure on page 9                        | 850 V (RMS)              |
| Transient overvoltage              |                                                      | $\pm 1200$ V             |
| <b>Base unit</b>                   |                                                      |                          |
| Input capacitance                  | must be compensated by probe's LF compensation       | 10 pF to 50 pF           |
| Input coupling                     | AC/DC                                                | 1 M $\Omega$             |



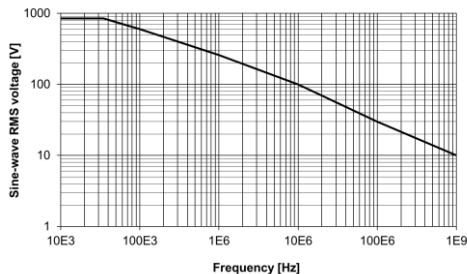

*R&S®RT-ZH03 maximum rated sine-wave root mean square voltage versus frequency*


General data

|                     |                             |                                                                                      |
|---------------------|-----------------------------|--------------------------------------------------------------------------------------|
| Temperature         |                             |                                                                                      |
| Temperature loading | operating temperature range | 0 °C to +40 °C                                                                       |
| Climatic loading    |                             | 80 % relative humidity without condensation                                          |
| Altitude            | operation                   | up to 2000 m                                                                         |
| Safety              |                             | in line with Low Voltage Directive 2014/35/EU, IEC/EN 61010-031 (pollution degree 2) |
| RoHS                |                             | in line with RoHS Directive 2011/65/EU                                               |
| Mechanical data     |                             |                                                                                      |
| Dimensions          | diameter of probe tip       | approx. 5 mm (0.2 in)                                                                |
|                     | cable length                | approx. 1.3 m (51 in)                                                                |
| Weight              | probe only                  | approx. 55 g (0.12 lb)                                                               |
| Probe interface     |                             |                                                                                      |
| Connector           |                             | BNC                                                                                  |


## R&S®RT-ZH10/-ZH11 high voltage passive probes

All parameters are valid when the probe is connected to an appropriate Rohde & Schwarz oscilloscope with an input impedance of 1 M $\Omega$ . See table on page 5 and Rohde & Schwarz oscilloscope operating manual for more details.


|                                    |                                                      | R&S®RT-ZH10         | R&S®RT-ZH11 |
|------------------------------------|------------------------------------------------------|---------------------|-------------|
| <b>Step response</b>               |                                                      |                     |             |
| Rise time                          | system, 10 % to 90 %                                 | 900 ps (meas.)      |             |
| <b>Frequency response</b>          |                                                      |                     |             |
| Bandwidth                          | system, -3 dB, starting at DC                        | > 400 MHz (meas.)   |             |
| <b>Input impedance</b>             |                                                      |                     |             |
| DC input resistance                | system                                               | 50 MΩ ± 2 %         |             |
| Input capacitance                  | system                                               | 7.5 pF (meas.)      |             |
| <b>DC characteristics</b>          |                                                      |                     |             |
| Attenuation                        | system, automatically corrected on base unit display | 100:1               | 1000:1      |
| Attenuation error                  | probe only, with ideal 1 MΩ load impedance           | ±2 %                |             |
| Attenuation voltage coefficient    |                                                      | ±0.0005 %/V (meas.) |             |
| <b>Maximum rated input voltage</b> |                                                      |                     |             |
| Continuous voltage                 | derated, see figures on page 11                      | 1000 V (RMS) CAT II |             |
| Transient overvoltage              |                                                      | ±4000 V             |             |
| <b>Base unit</b>                   |                                                      |                     |             |
| Input capacitance                  | must be compensated by probe's LF compensation       | 5 pF to 20 pF       |             |
| Input coupling                     | AC/DC                                                | 1 MΩ                |             |

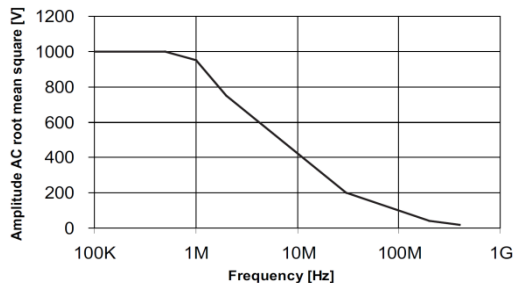


*R&S®RT-ZH10/-ZH11 maximum rated sine-wave root mean square voltage versus frequency, CAT I*

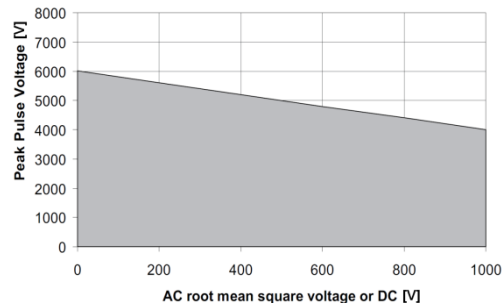

*R&S®RT-ZH10/-ZH11 maximum root mean square voltage versus peak pulse voltage, CAT I*

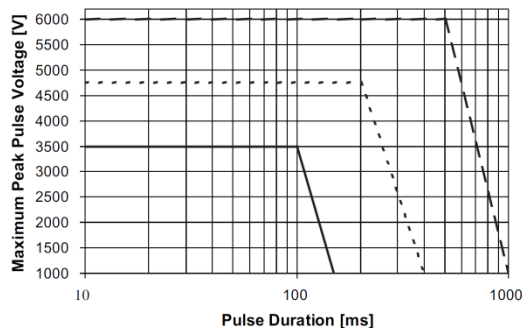

*R&S®RT-ZH10/-ZH11 maximum pulse derating, CAT I*

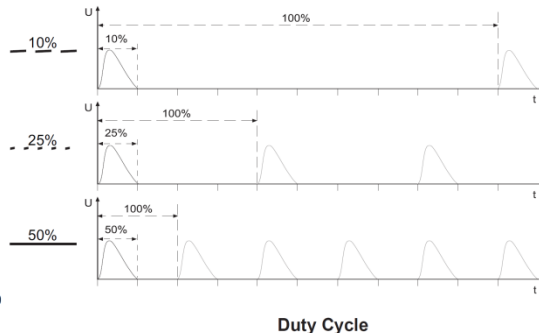

## General data



|                        |                             |                                                                                             |
|------------------------|-----------------------------|---------------------------------------------------------------------------------------------|
| <b>Temperature</b>     |                             |                                                                                             |
| Temperature loading    | operating temperature range | 0 °C to +50 °C                                                                              |
|                        | storage temperature range   | –40 °C to +70 °C                                                                            |
| Climatic loading       |                             | 80 % relative humidity for temperatures up to +31 °C, decreasing linearly to 40 % at +50 °C |
| Altitude               | operation                   | up to 2000 m                                                                                |
|                        | transport                   | up to 15000 m                                                                               |
| <b>Safety</b>          |                             | in line with Low Voltage Directive 2014/35/EU, IEC/EN 61010-031 (pollution degree 2)        |
| <b>RoHS</b>            |                             | in line with RoHS Directive 2011/65/EU                                                      |
| <b>Mechanical data</b> |                             |                                                                                             |
| Dimensions             | diameter of probe tip       | approx. 5 mm (0.2 in)                                                                       |
|                        | cable length                | approx. 2 m (79 in)                                                                         |
| Weight                 | probe only                  | approx. 67 g (0.15 lb)                                                                      |
| <b>Probe interface</b> |                             |                                                                                             |
| Connector              |                             | BNC with readout                                                                            |

## R&S®RT-ZI10(C)/-ZI11 isolated probes

All parameters are valid when the probe is connected to an appropriate Rohde & Schwarz oscilloscope with an input impedance of 1 M $\Omega$ . The R&S RT-ZI10/-ZI11 must be used only with insulated oscilloscopes provided with touch-protected inputs. See table on page 5 and Rohde & Schwarz oscilloscope operating manual for more details.

|                             |                                                                               | R&S®RT-ZI10          | R&S®RT-ZI11    |
|-----------------------------|-------------------------------------------------------------------------------|----------------------|----------------|
| Step response               |                                                                               |                      |                |
| Rise time                   | system, 10 % to 90 %                                                          | 900 ps (meas.)       |                |
| Frequency response          |                                                                               |                      |                |
| Bandwidth                   | system, −3 dB, starting at DC                                                 | > 500 MHz (meas.)    |                |
| Input impedance             |                                                                               |                      |                |
| DC input resistance         | system                                                                        | 10 MΩ ± 1 %          | 100 MΩ ± 1 %   |
| Input capacitance           | system                                                                        | 12 pF (meas.)        | 4.6 pF (meas.) |
| DC characteristics          |                                                                               |                      |                |
| Attenuation                 | system                                                                        | 10:1                 | 100:1          |
| Attenuation error           | system                                                                        | ±2 %                 |                |
| Maximum rated input voltage | between probe tip and probe reference terminal derated, see figure on page 15 | 1000 V (RMS)         | 3540 V (RMS)   |
|                             |                                                                               | 1000 V (RMS) CAT III |                |
|                             |                                                                               | 600 V (RMS) CAT IV   |                |
|                             | between probe terminals and earth ground derated, refer to base unit manual   | 1000 V (RMS)         |                |
| Base unit                   |                                                                               |                      |                |
| Use with                    |                                                                               | R&S®RTH              |                |
| Input capacitance           | must be compensated by probe's LF compensation                                | 10 pF to 22 pF       | 10 pF to 25 pF |
| Input coupling              | AC/DC                                                                         | 1 MΩ                 |                |

|                             |                                                                               |                         |
|-----------------------------|-------------------------------------------------------------------------------|-------------------------|
|                             |                                                                               | <b>R&amp;S®RT-ZI10C</b> |
| <b>Step response</b>        |                                                                               |                         |
| Rise time                   | system, 10 % to 90 %                                                          | 700 ps (meas.)          |
| <b>Frequency response</b>   |                                                                               |                         |
| Bandwidth                   | system, –3 dB, starting at DC                                                 | > 500 MHz (meas.)       |
| <b>Input impedance</b>      |                                                                               |                         |
| DC input resistance         | system                                                                        | 10 M $\Omega$ $\pm$ 1 % |
| Input capacitance           | system                                                                        | 11 pF (meas.)           |
| <b>DC characteristics</b>   |                                                                               |                         |
| Attenuation                 | system                                                                        | 10:1                    |
| Attenuation error           | system                                                                        | $\pm$ 2 %               |
| Maximum rated input voltage | between probe tip and probe reference terminal derated, see figure on page 15 | 300 V (RMS) CAT III     |
|                             | between probe terminals and earth ground derated, refer to base unit manual   | 300 V (RMS)             |
| <b>Base unit</b>            |                                                                               |                         |
| Use with                    |                                                                               | R&S®RTH                 |
| Input capacitance           | must be compensated by probe's LF compensation                                | 10 pF to 22 pF          |
| Input coupling              | AC/DC                                                                         | 1 M $\Omega$            |

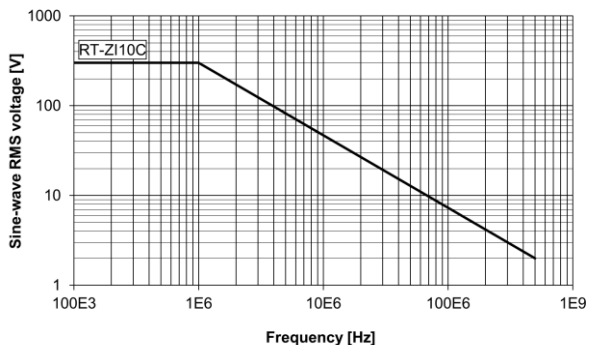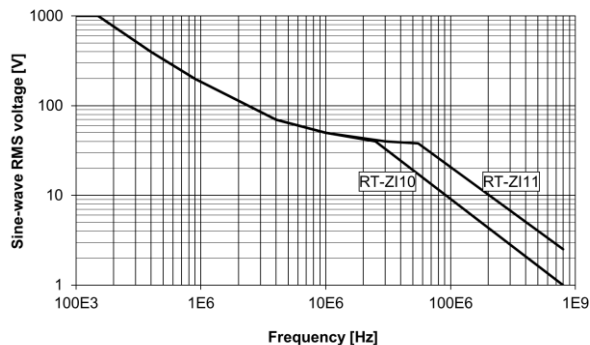

*R&S®RT-ZI10(C)/-ZI11 maximum rated sine-wave root mean square voltage between probe tip and probe reference terminal versus frequency (CAT III)*

## General data

|                        |                                                                   |                                                                                             |
|------------------------|-------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| <b>Temperature</b>     |                                                                   |                                                                                             |
| Temperature loading    | operating temperature range                                       | +5 °C to +40 °C                                                                             |
| Climatic loading       |                                                                   | 80 % relative humidity for temperatures up to +31 °C, decreasing linearly to 40 % at +50 °C |
| Altitude               | operation                                                         | up to 2000 m                                                                                |
| <b>Safety</b>          |                                                                   | in line with Low Voltage Directive 2014/35/EU, IEC/EN 61010-031 (pollution degree 2)        |
| <b>RoHS</b>            |                                                                   | in line with RoHS Directive 2011/65/EU                                                      |
| <b>Mechanical data</b> |                                                                   |                                                                                             |
| Dimensions             | diameter of probe tip                                             | approx. 5 mm (0.2 in)                                                                       |
|                        | diameter of reference terminal (R&S®RT-ZI10 and R&S®RT-ZI11 only) | approx. 2 mm (0.08 in)                                                                      |
|                        | cable length                                                      | approx. 1.2 m (47 in)                                                                       |
| Weight                 | probe only                                                        | approx. 75 g (0.17 lb)                                                                      |
| <b>Probe interface</b> |                                                                   |                                                                                             |
| Connector              |                                                                   | BNC, isolated                                                                               |



## R&S®RT-ZISO isolated probing system


All parameters are valid when the probe is connected to an appropriate oscilloscope with an input impedance of 50  $\Omega$ . The probe settings are set by the oscilloscope settings (operation via oscilloscope connector cable on an appropriate Rohde & Schwarz oscilloscope)  
See table on page 5 and Rohde & Schwarz oscilloscope operating manual for more details.

| <b>Step response</b>      |                                                |                   |
|---------------------------|------------------------------------------------|-------------------|
| Rise time                 | 10 % to 90 %                                   |                   |
|                           | with R&S®ZISO-B901 option                      | < 4 ns (meas.)    |
|                           | with R&S®ZISO-B902 option or -B202 upgrade     | < 2 ns (meas.)    |
|                           | with R&S®ZISO-B903 option or -B203 upgrade     | < 1.14 ns (meas.) |
|                           | with R&S®ZISO-B905 option or -B205 upgrade     | < 800 ps (meas.)  |
|                           | with R&S®ZISO-B910 option or -B210 upgrade     | < 450 ps (meas.)  |
| Flatness                  | starting 10 ns after edge                      | 3 % (meas.)       |
| Propagation delay         | incl. oscilloscope connector cable             |                   |
|                           | with R&S®ZISO-B403 option (3 m fiber cable)    | 27 ns (meas.)     |
|                           | with R&S®ZISO-B410 option (10 m fiber cable)   | 63 ns (meas.)     |
| <b>Frequency response</b> |                                                |                   |
| Bandwidth                 | starting at DC, calculated from 0.45/rise time |                   |
|                           | with R&S®ZISO-B901 option                      | 100 MHz           |
|                           | with R&S®ZISO-B902 option or -B202 upgrade     | 200 MHz           |
|                           | with R&S®ZISO-B903 option or -B203 upgrade     | 350 MHz           |
|                           | with R&S®ZISO-B905 option or -B205 upgrade     | 500 MHz           |
|                           | with R&S®ZISO-B910 option or -B210 upgrade     | 1 GHz             |

|                                |                                                                                                                                       |                                                    |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| Common mode rejection (meas.)  | DC                                                                                                                                    | 145 dB                                             |
|                                | 1 MHz                                                                                                                                 | 145 dB                                             |
|                                | 100 MHz                                                                                                                               | 110 dB                                             |
|                                | 200 MHz                                                                                                                               | 100 dB                                             |
|                                | 500 MHz                                                                                                                               | 100 dB                                             |
|                                | 1 GHz                                                                                                                                 | 90 dB                                              |
| <b>Input impedance</b>         |                                                                                                                                       |                                                    |
| DC input resistance            |                                                                                                                                       | 1 M $\Omega$ $\pm$ 1 %                             |
| Input capacitance              |                                                                                                                                       | 8 pF (meas.)                                       |
| <b>DC characteristics</b>      |                                                                                                                                       |                                                    |
| Attenuation                    | automatically set by oscilloscope vertical setting<br>(operation on appropriate Rohde & Schwarz<br>oscilloscope, see table on page 5) | 0.04:1                                             |
|                                |                                                                                                                                       | 0.01:1                                             |
|                                |                                                                                                                                       | 0.2:1                                              |
|                                |                                                                                                                                       | 0.4:1                                              |
|                                |                                                                                                                                       | 1:1                                                |
|                                |                                                                                                                                       | 2:1                                                |
|                                |                                                                                                                                       | 4:1                                                |
|                                |                                                                                                                                       | 10:1                                               |
|                                |                                                                                                                                       | 20:1                                               |
|                                |                                                                                                                                       | 40:1                                               |
|                                |                                                                                                                                       | 120:1                                              |
| Attenuation error              | after self-alignment                                                                                                                  |                                                    |
|                                | input voltage range > $\pm 0.01$ V                                                                                                    | $\pm 1.5$ % full scale                             |
|                                | input voltage range $\pm 0.01$ V                                                                                                      | $\pm 2.5$ % full scale                             |
| Temperature drift, attenuation |                                                                                                                                       | $\pm 0.15$ %/ $^{\circ}$ C (meas.)                 |
| Zero error                     | after self-alignment (input related)                                                                                                  | $\pm 0.5$ mV $\pm 0.02 \times$ input voltage range |

| <b>Dynamic range</b>      |                                                                                        |                                                                                           |
|---------------------------|----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
| Input voltage range       | 0.04:1                                                                                 | ±0.01 V                                                                                   |
|                           | 0.1:1                                                                                  | ±0.025 V                                                                                  |
|                           | 0.2:1                                                                                  | ±0.05 V                                                                                   |
|                           | 0.4:1                                                                                  | ±0.1 V                                                                                    |
|                           | 1:1                                                                                    | ±0.25 V                                                                                   |
|                           | 2:1                                                                                    | ±0.5 V                                                                                    |
|                           | 4:1                                                                                    | ±1 V                                                                                      |
|                           | 10:1                                                                                   | ±2.5 V                                                                                    |
|                           | 20:1                                                                                   | ±5 V                                                                                      |
|                           | 40:1                                                                                   | ±10 V                                                                                     |
|                           | 120:1                                                                                  | ±30 V                                                                                     |
| Offset compensation range | in all attenuation settings applicable                                                 | ±30 V                                                                                     |
| Offset compensation error |                                                                                        | $\pm(0.35 \% \times  \text{offset}  + 0.35 \% \times \text{input voltage range})$ (meas.) |
| Operating voltage window  | each signal socket to ground, not handheld, with 1 m protective distance to probe head | ±60 kV                                                                                    |
|                           | handheld in combination with R&S®ZISO-Zxxx (excl. R&S®ZISO-Z301)                       | 1000 V (RMS) CAT III                                                                      |
|                           | handheld in combination with R&S®ZISO-Z301                                             | 300 V (RMS) CAT III                                                                       |

|                              |                                                                                                                  |                     |                     |                           |                     |                   |
|------------------------------|------------------------------------------------------------------------------------------------------------------|---------------------|---------------------|---------------------------|---------------------|-------------------|
| System noise voltage (meas.) | measured with compatible Rohde & Schwarz oscilloscope (system noise is depending on oscilloscope frontend); R&S® |                     |                     |                           |                     |                   |
|                              | input voltage range                                                                                              | ZISO-B901 (100 MHz) | ZISO-B902 (200 MHz) | ZISO-B903 (350 MHz)       | ZISO-B905 (500 MHz) | ZISO-B910 (1 GHz) |
|                              | ±0.01 V                                                                                                          | 107 µV              | 121 µV              | 153 µV                    | 172 µV              | 245 µV            |
|                              | ±0.025 V                                                                                                         | 140 µV              | 161 µV              | 220 µV                    | 252 µV              | 383 µV            |
|                              | ±0.05 V                                                                                                          | 211 µV              | 255 µV              | 363 µV                    | 417 µV              | 623 µV            |
|                              | ±0.1 V                                                                                                           | 382 µV              | 465 µV              | 683 µV                    | 780 µV              | 1.16 mV           |
|                              | ±0.25 V                                                                                                          | 922 µV              | 1.13 mV             | 1.67 mV                   | 1.92 mV             | 2.84 mV           |
|                              | ±0.5 V                                                                                                           | 1.84 mV             | 2.26 mV             | 3.35 mV                   | 3.81 mV             | 5.65 mV           |
|                              | ±1 V                                                                                                             | 5.90 mV             | 7.27 mV             | 9.49 mV                   | 10.9 mV             | 16.0 mV           |
|                              | ±2.5 V                                                                                                           | 10.4 mV             | 12.9 mV             | 18.3 mV                   | 20.9 mV             | 31.2 mV           |
|                              | ±5 V                                                                                                             | 18.9 mV             | 23.5 mV             | 34.3 mV                   | 39.0 mV             | 58.5 mV           |
|                              | ±10 V                                                                                                            | 37.0 mV             | 45.7 mV             | 67.4 mV                   | 77.1 mV             | 115 mV            |
|                              | ±30 V                                                                                                            | 110 mV              | 134 mV              | 201 mV                    | 229 mV              | 342 mV            |
| Maximum rated input voltage  |                                                                                                                  |                     |                     |                           |                     |                   |
| Continuous voltage           | derated, refer to manual, input inner and outer conductor to ground with R&S®ZISO-Zxxx (excl. R&S®ZISO-Z301)     |                     |                     | 1000 V (RMS) CAT III      |                     |                   |
|                              | derated, refer to manual, input inner and outer conductor to ground with R&S®ZISO-Z301                           |                     |                     | 300V (RMS) CAT III        |                     |                   |
|                              | derated, see figure on page 21, input inner conductor to reference terminal without R&S®ZISO-Zxxx                |                     |                     | 30 V (RMS), 42.4 V (peak) |                     |                   |
|                              | DC voltage, input inner conductor to reference terminal without R&S®ZISO-Zxxx                                    |                     |                     | ±60 V                     |                     |                   |
| Base unit                    |                                                                                                                  |                     |                     |                           |                     |                   |
| Input coupling               | DC                                                                                                               |                     |                     | 50 Ω                      |                     |                   |

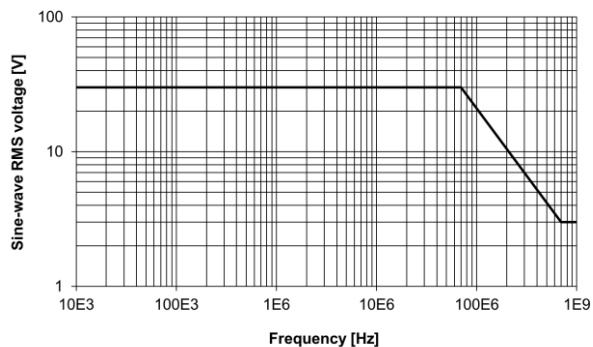

*R&S®RT-ZISO maximum rated sine-wave root mean square voltage between probe input and probe reference terminal versus frequency*

## R&S®ProbeMeter

Specifications for measurement error apply only when offset compensation setting is 0 V. The R&S®ProbeMeter can be used to measure differential voltage.

| Measurement error     |                                                              |                                                 |
|-----------------------|--------------------------------------------------------------|-------------------------------------------------|
| DC coupling (meas.)   | probe head only and with R&S®ZISO-Zxxx (excl. R&S®ZISO-Z302) |                                                 |
|                       | +15 °C to +35 °C                                             | ±0.2 % of reading,<br>±0.01 V × tip attenuation |
|                       | 0 °C to +40 °C                                               | ±0.4 % of reading,<br>±0.02 V × tip attenuation |
|                       | with R&S®ZISO-Z302                                           |                                                 |
|                       | +15 °C to +35 °C                                             | ±0.8 % of reading,<br>±0.01 V × tip attenuation |
|                       | 0 °C to +40 °C                                               | ±1.6 % of reading,<br>±0.02 V × tip attenuation |
| AC coupling (meas.)   | probe head only and with R&S®ZISO-Zxxx (excl. R&S®ZISO-Z302) |                                                 |
|                       | +15 °C to +35 °C                                             | ±0.4 % of reading,<br>±0.01 V × tip attenuation |
|                       | 0 °C to +40 °C                                               | ±0.8 % of reading,<br>±0.02 V × tip attenuation |
|                       | with R&S®ZISO-Z302                                           |                                                 |
|                       | +15 °C to +35 °C                                             | ±0.4 % of reading,<br>±0.01 V × tip attenuation |
|                       | 0 °C to +40 °C                                               | ±1.6 % of reading,<br>±0.02 V × tip attenuation |
| Temperature drift     |                                                              | 0.02 %/°C of reading ±2 mV/°C (meas.)           |
| 50 Hz/60 Hz rejection |                                                              | > 87 dB                                         |
| Integration time      |                                                              | 147 ms (typ.)                                   |

## General data

|                              |                             |                                                                                                               |
|------------------------------|-----------------------------|---------------------------------------------------------------------------------------------------------------|
| <b>Temperature</b>           |                             |                                                                                                               |
| Temperature loading          | operating temperature range | 0 °C to +40 °C                                                                                                |
|                              | storage temperature range   | -40 °C to +70 °C                                                                                              |
| Climatic loading             |                             | +25 °C/+40 °C cyclic at 95 % relative humidity without condensation, in line with IEC 60068-2-30              |
| Altitude                     | operation                   | up to 2000 m                                                                                                  |
|                              | transport                   | up to 4500 m                                                                                                  |
| <b>Mechanical resistance</b> |                             |                                                                                                               |
| Vibration                    | sinusoidal                  | 5 Hz to 150 Hz, max. 1.8 g at 55 Hz, 0.5 g from 55 Hz to 150 Hz, in line with EN 60068-2-6                    |
|                              | random                      | 8 Hz to 500 Hz, acceleration 1.2 g (RMS), in line with EN 60068-2-64                                          |
| Shock                        |                             | 40 g shock spectrum, in line with MIL-STD-810G                                                                |
| <b>EMC</b>                   |                             | in line with EMC Directive 2014/30/EC, IEC/EN 61326-1 (table 2), IEC/EN 61326-2-1, CISPR 11/EN 55011(class A) |
| <b>Calibration interval</b>  |                             | 2 years (or 10000 h of operation)                                                                             |
| <b>Safety</b>                |                             | in line with IEC/EN 61010-1, IEC/EN 61010-031, IEC 60825-1                                                    |
| <b>RoHS</b>                  |                             | in line with RoHS Directive 2011/65/EU                                                                        |
| <b>External power supply</b> |                             | 100 V to 240 V $\pm 10$ % at 50 Hz/60 Hz, max. 1.0 A or 1.4 A                                                 |

|                                      |                                                                    |                                                                  |
|--------------------------------------|--------------------------------------------------------------------|------------------------------------------------------------------|
| <b>Mechanical data</b>               |                                                                    |                                                                  |
| Dimensions                           | probe head, without connectors and bend protection (W × H × L)     | approx. 50 mm × 40 mm × 172 mm<br>(1.97 in × 1.58 in × 6.77 in)  |
|                                      | probe receiver, without connectors and bend protection (W × H × L) | approx. 120 mm × 69 mm × 158 mm<br>(4.72 in × 2.72 in × 6.22 in) |
|                                      | fiber cable length                                                 |                                                                  |
|                                      | R&S®ZISO-B403 option                                               | approx. 3 m (10 ft)                                              |
|                                      | R&S®ZISO-B410 option                                               | approx. 10 m (33 ft)                                             |
| Weight                               | probe without accessory                                            | approx. 1.5 kg (3.3 lb)                                          |
|                                      | probe with standard accessory (incl. bag)                          | approx. 3.2 kg (7.1 lb)                                          |
| Minimum bend radius of optical fiber |                                                                    | 10 cm (4 in)                                                     |
| <b>Probe interface</b>               |                                                                    |                                                                  |
| Input socket                         |                                                                    | SMA (female)                                                     |
| Connector                            | via oscilloscope connector cable                                   | Rohde & Schwarz probe interface                                  |
|                                      | without oscilloscope connector cable                               | SMA (female)                                                     |



## R&S® ZISO-Z1xx probe tip modules

|                                    |                                                                                | R&S® ZISO-Z101       |
|------------------------------------|--------------------------------------------------------------------------------|----------------------|
| <b>Step response</b>               |                                                                                |                      |
| Rise time                          | system, 10 % to 90 %                                                           | < 450 ps (meas.)     |
| Flatness                           | starting 10 ns after edge                                                      | 2 % (meas.)          |
| <b>Frequency response</b>          |                                                                                |                      |
| Bandwidth                          | system, -3 dB, starting at DC                                                  | > 1 GHz (meas.)      |
| Flatness                           | 1 kHz up to half of the system bandwidth                                       | 0.2 dB (meas.)       |
| Common mode rejection (meas.)      | DC                                                                             | 145 dB               |
|                                    | 1 MHz                                                                          | 120 dB               |
|                                    | 100 MHz                                                                        | 100 dB               |
|                                    | 200 MHz                                                                        | 95 dB                |
|                                    | 500 MHz                                                                        | 95 dB                |
|                                    | 1 GHz                                                                          | 80 dB                |
| <b>Input impedance</b>             |                                                                                |                      |
| DC input resistance                | system                                                                         | 50 $\Omega \pm 1 \%$ |
| Reflection coefficient             | system                                                                         | < -12 dB (meas.)     |
| <b>DC characteristics</b>          |                                                                                |                      |
| Attenuation                        | system                                                                         | 1.5:1                |
| Attenuation error                  | system                                                                         | $\pm 2 \%$           |
| <b>Maximum rated input voltage</b> |                                                                                |                      |
| Continuous voltage                 | between probe tip and probe reference terminal                                 | 8 V (RMS)            |
|                                    | between probe terminals and earth ground<br>derated, refer to base unit manual | 1000 V (RMS) CAT III |
| Transient voltage                  |                                                                                | $\pm 45$ V (peak)    |

|                      |  |             |
|----------------------|--|-------------|
| <b>Dynamic range</b> |  |             |
| Input voltage range  |  | ±45 V       |
| <b>Base unit</b>     |  |             |
| Use with             |  | R&S®RT-ZISO |


## General data

|                        |                             |                                                                                                  |
|------------------------|-----------------------------|--------------------------------------------------------------------------------------------------|
| <b>Temperature</b>     |                             |                                                                                                  |
| Temperature loading    | operating temperature range | 0 °C to +40 °C                                                                                   |
| Climatic loading       |                             | +25 °C/+40 °C cyclic at 95 % relative humidity without condensation, in line with IEC 60068-2-30 |
| Altitude               | operation                   | up to 2000 m                                                                                     |
| <b>Safety</b>          |                             | in line with Low Voltage Directive 2014/35/EU, IEC/EN 61010-031 (pollution degree 2)             |
| <b>RoHS</b>            |                             | in line with RoHS Directive 2011/65/EU                                                           |
| <b>Mechanical data</b> |                             |                                                                                                  |
| Dimensions             | diameter of probe tip       | approx. 5 mm (0.2 in)                                                                            |
|                        | cable length                | approx. 37 cm (14.6 in)                                                                          |
| Weight                 | probe only                  | approx. 75 g (0.17 lb)                                                                           |
| <b>Probe input</b>     |                             |                                                                                                  |
| Connector              |                             | MMCX (male)                                                                                      |

## R&S® ZISO-Z2xx probe tip modules

|                               |                                          | R&S® ZISO-Z201          | R&S® ZISO-Z202          | R&S® ZISO-Z203          |
|-------------------------------|------------------------------------------|-------------------------|-------------------------|-------------------------|
| <b>Step response</b>          |                                          |                         |                         |                         |
| Rise time                     | system, 10 % to 90 %                     | < 450 ps (meas.)        | < 450 ps (meas.)        | < 450 ps (meas.)        |
| Flatness                      | starting 10 ns after edge                | 2 % (meas.)             | 2 % (meas.)             | 2 % (meas.)             |
| <b>Frequency response</b>     |                                          |                         |                         |                         |
| Bandwidth                     | system, -3 dB, starting at DC            | > 1 GHz (meas.)         |                         |                         |
| Flatness                      | 1 kHz up to half of the system bandwidth | 0.2 dB (meas.)          |                         |                         |
| Common mode rejection (meas.) | DC                                       | 145 dB                  | 129 dB                  | 120 dB                  |
|                               | 1 MHz                                    | 105 dB                  | 105 dB                  | 98 dB                   |
|                               | 100 MHz                                  | 85 dB                   | 47 dB                   | 44 dB                   |
|                               | 200 MHz                                  | 80 dB                   | 43 dB                   | 40 dB                   |
|                               | 500 MHz                                  | 75 dB                   | 30 dB                   | 28 dB                   |
|                               | 1 GHz                                    | 60 dB                   | 11 dB                   | 8 dB                    |
| <b>Input impedance</b>        |                                          |                         |                         |                         |
| DC input resistance           | system                                   | 10 M $\Omega$ $\pm$ 1 % | 10 M $\Omega$ $\pm$ 1 % | 40 M $\Omega$ $\pm$ 1 % |
| Input capacitance             | system                                   | 3.7 pF (meas.)          | 3.5 pF (meas.)          | 3.2 pF (meas.)          |
| <b>DC characteristics</b>     |                                          |                         |                         |                         |
| Attenuation                   | system                                   | 10:1                    | 25:1                    | 100:1                   |
| Attenuation error             | system                                   | $\pm$ 2 %               |                         |                         |

| <b>Maximum rated input voltage</b> |                                                                               |                      |                |                |
|------------------------------------|-------------------------------------------------------------------------------|----------------------|----------------|----------------|
| Continuous voltage                 | between probe tip and probe reference terminal derated, see figure on page 28 | 300 V (RMS)          | 750 V (RMS)    | 2500 V (RMS)   |
|                                    | between probe terminals and earth ground derated, refer to base unit manual   | 1000 V (RMS) CAT III |                |                |
| Transient voltage                  | between probe tip and reference terminal                                      | ±500 V (peak)        | ±1000 V (peak) | ±3500 V (peak) |
| <b>Dynamic range</b>               |                                                                               |                      |                |                |
| Input voltage range                |                                                                               | ±300 V               | ±750 V         | ±3000 V        |
| <b>Base unit</b>                   |                                                                               |                      |                |                |
| Use with                           |                                                                               | R&S®RT-ZISO          |                |                |

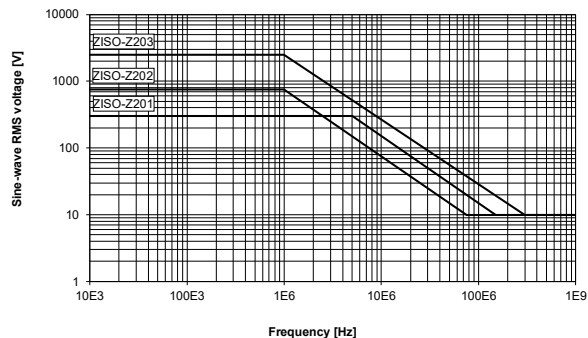



*R&S®ZISO-Z201/-Z202/-Z203 maximum rated sine-wave root mean square voltage between probe tip and probe reference terminal versus frequency (CAT III)*

## General data

|                        |                             |                                                                                                  |
|------------------------|-----------------------------|--------------------------------------------------------------------------------------------------|
| <b>Temperature</b>     |                             |                                                                                                  |
| Temperature loading    | operating temperature range | 0 °C to +40 °C                                                                                   |
| Climatic loading       |                             | +25 °C/+40 °C cyclic at 95 % relative humidity without condensation, in line with IEC 60068-2-30 |
| Altitude               | operation                   | up to 2000 m                                                                                     |
| <b>Safety</b>          |                             | in line with Low Voltage Directive 2014/35/EU, IEC/EN 61010-031 (pollution degree 2)             |
| <b>RoHS</b>            |                             | in line with RoHS Directive 2011/65/EU                                                           |
| <b>Mechanical data</b> |                             |                                                                                                  |
| Dimensions             | diameter of probe tip       | approx. 5 mm (0.2 in)                                                                            |
|                        | cable length                |                                                                                                  |
|                        | R&S®ZISO-Z201               | approx. 21.5 cm (8.5 in)                                                                         |
|                        | R&S®ZISO-Z202               | approx. 32 cm (12.6 in)                                                                          |
|                        | R&S®ZISO-Z203               | approx. 38 cm (15 in)                                                                            |
| Weight                 | probe only                  | approx. 75 g (0.17 lb)                                                                           |
| <b>Probe input</b>     |                             |                                                                                                  |
| Connector              | R&S®ZISO-Z201               | MMCX (male)                                                                                      |
|                        | R&S®ZISO-Z202               | SQPIN (2.54 mm (0.1 in), female)                                                                 |
|                        | R&S®ZISO-Z203               | WSQPIN (5.08 mm (0.2 in), female)                                                                |

## R&S® ZISO-Z3xx probe tip modules

|                                    |                                                                                  | R&S®ZISO-Z301          | R&S®ZISO-Z302           |
|------------------------------------|----------------------------------------------------------------------------------|------------------------|-------------------------|
| <b>Step response</b>               |                                                                                  |                        |                         |
| Rise time                          | system, 10 % to 90 %                                                             | 700 ps (meas.)         | 900 ps (meas.)          |
| Flatness                           | starting 10 ns after edge                                                        | 2 % (meas.)            | 2 % (meas.)             |
| <b>Frequency response</b>          |                                                                                  |                        |                         |
| Bandwidth                          | system, –3 dB, starting at DC                                                    | > 500 MHz (meas.)      |                         |
| <b>Input impedance</b>             |                                                                                  |                        |                         |
| DC input resistance                | system                                                                           | 10 MΩ ± 1 %            | 100 MΩ ± 1 %            |
| Input capacitance                  | system                                                                           | 11 pF (meas.)          | 4.6 pF (meas.)          |
| <b>DC characteristics</b>          |                                                                                  |                        |                         |
| Attenuation                        | system                                                                           | 10:1                   | 100:1                   |
| Attenuation error                  | system                                                                           | ±2 %                   |                         |
| <b>Maximum rated input voltage</b> |                                                                                  |                        |                         |
| Continuous voltage                 | between probe tip and probe reference terminal<br>derated, see figure on page 31 | 300 V (RMS)            | 3540 V (RMS)            |
|                                    | between probe terminals and earth ground<br>derated, refer to base unit manual   | 300 V (RMS)<br>CAT III | 1000 V (RMS)<br>CAT III |
| <b>Dynamic range</b>               |                                                                                  |                        |                         |
| Input voltage range                |                                                                                  | ±300 V                 | ±3000 V                 |
| <b>Base unit</b>                   |                                                                                  |                        |                         |
| Use with                           |                                                                                  | R&S®RT-ZISO            |                         |

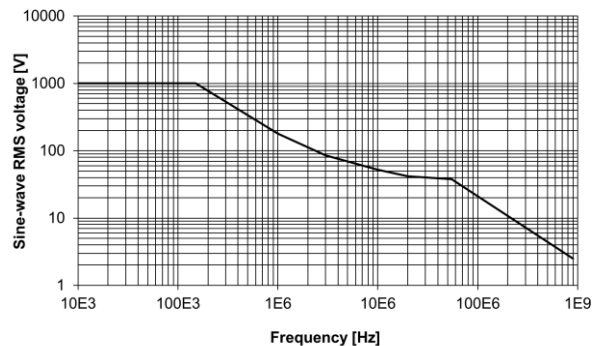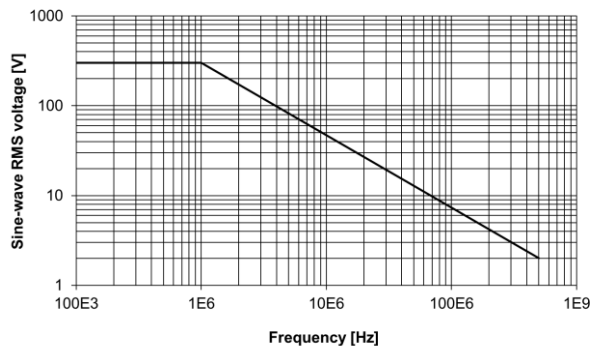

*R&S®ZISO-Z301 (left)/R&S®ZISO-Z302 (right) maximum rated sine-wave root mean square voltage between probe tip and probe reference terminal versus frequency (CAT III)*

## General data

|                        |                                |                                                                                                  |
|------------------------|--------------------------------|--------------------------------------------------------------------------------------------------|
| <b>Temperature</b>     |                                |                                                                                                  |
| Temperature loading    | operating temperature range    | –5 °C to +40 °C                                                                                  |
| Climatic loading       |                                | +25 °C/+40 °C cyclic at 95 % relative humidity without condensation, in line with IEC 60068-2-30 |
| Altitude               | operation                      | up to 2000 m                                                                                     |
| <b>Safety</b>          |                                | in line with Low Voltage Directive 2014/35/EU, IEC/EN 61010-031 (pollution degree 2)             |
| <b>RoHS</b>            |                                | in line with RoHS Directive 2011/65/EU                                                           |
| <b>Mechanical data</b> |                                |                                                                                                  |
| Dimensions             | diameter of probe tip          | approx. 5 mm (0.2 in)                                                                            |
|                        | diameter of reference terminal | approx. 2 mm (0.08 in)                                                                           |
|                        | cable length                   | approx. 1.2 m (47 in)                                                                            |
| Weight                 | probe only                     | approx. 75 g (0.17 lb)                                                                           |
| <b>Probe input</b>     |                                |                                                                                                  |
| Connector              |                                | browser                                                                                          |




## R&S®RT-ZD002/-ZD003 high voltage differential probes (discontinued products)

All parameters are valid when the probe is connected to an appropriate Rohde & Schwarz oscilloscope with an input impedance of 1 M $\Omega$ . See table on page 5 and Rohde & Schwarz oscilloscope operating manual for more details.

|                                    |                                                          | R&S®RT-ZD002         | R&S®RT-ZD003    |
|------------------------------------|----------------------------------------------------------|----------------------|-----------------|
| <b>Step response</b>               |                                                          |                      |                 |
| Rise time                          | 10 % to 90 %                                             | 14 ns (meas.)        |                 |
| <b>Frequency response</b>          |                                                          |                      |                 |
| Bandwidth                          | –3 dB, starting at DC,<br>calculated from 0.35/rise time | 25 MHz               |                 |
| Common mode rejection              | DC to 100 Hz                                             | 86 dB (meas.)        | 80 dB (meas.)   |
|                                    | 100 Hz to 20 kHz                                         | 66 dB (meas.)        | 60 dB (meas.)   |
| <b>Input impedance</b>             |                                                          |                      |                 |
| DC input resistance                | differential (between signal sockets)                    | 8 MΩ (meas.)         |                 |
|                                    | single-ended (each signal socket to ground)              | 4 MΩ (meas.)         |                 |
| Input capacitance                  | differential (between signal sockets)                    | 2.75 pF (meas.)      |                 |
|                                    | single-ended (each signal socket to ground)              | 5.5 pF (meas.)       |                 |
| <b>DC characteristics</b>          |                                                          |                      |                 |
| Attenuation                        | low/high attenuation                                     | 10:1, 100:1          | 20:1, 200:1     |
| Attenuation error                  |                                                          | ±2 % (meas.)         | ±2 % (meas.)    |
| Maximum differential input         | between signal sockets, low/high attenuation             | ±70 V, ±700 V        | ±140 V, ±1400 V |
| Operating voltage window           | each signal socket to ground                             | ±700 V               | ±1400 V         |
| Zero error                         | referenced to probe output                               | ±5 mV (meas.)        |                 |
| Noise voltage                      | referenced to probe output                               | 0.7 mV (RMS)         |                 |
| <b>Maximum rated input voltage</b> |                                                          |                      |                 |
| Continuous voltage                 | derated, see figure,<br>each signal socket to ground     | 1000 V (RMS) CAT III |                 |

|                  |  |              |
|------------------|--|--------------|
| <b>Base unit</b> |  |              |
| Input coupling   |  | 1 M $\Omega$ |

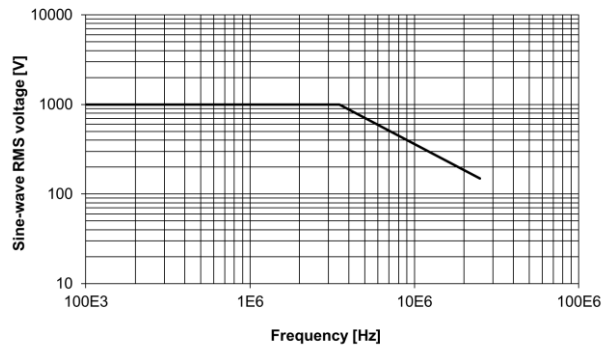

*Maximum rated sine-wave root mean square voltage versus frequency*

## General data

|                             |                                                    | R&S®RT-ZD002                                                 | R&S®RT-ZD003 |
|-----------------------------|----------------------------------------------------|--------------------------------------------------------------|--------------|
| <b>Temperature</b>          |                                                    |                                                              |              |
| Temperature loading         | operating temperature range                        | -10 °C to +40 °C                                             |              |
|                             | storage temperature range,<br>with battery removed | -30 °C to +70 °C                                             |              |
| Climatic loading            |                                                    | 85 % relative humidity without condensation                  |              |
| Altitude                    | operation                                          | up to 2000 m                                                 |              |
| <b>Safety</b>               |                                                    | in line with EN 61010-1                                      |              |
| <b>RoHS</b>                 |                                                    | in line with RoHS Directive 2011/65/EU                       |              |
| <b>EMC</b>                  |                                                    | in line with EN 61326-1                                      |              |
| <b>Calibration interval</b> |                                                    | 2 years                                                      |              |
| <b>Mechanical data</b>      |                                                    |                                                              |              |
| Dimensions                  | probe head (L × W × H)                             | approx. 170 mm × 63 mm × 21 mm<br>(6.7 in × 2.5 in × 0.8 in) |              |
|                             | length of probe cable                              | approx. 95 cm (37 in)                                        |              |
|                             | length of input leads                              | approx. 45 cm (18 in)                                        |              |
| Weight                      | probe only                                         | approx. 400 g (0.88 lb)                                      |              |
| <b>Probe interface</b>      |                                                    |                                                              |              |
| Connector                   |                                                    | BNC                                                          |              |
| Input sockets               |                                                    | 4 mm                                                         |              |
| Supply voltage              |                                                    | 4.5 V to 12 V, 360 mW                                        |              |
| Supply type                 |                                                    | battery or USB adapter                                       |              |
| Battery type                |                                                    | 4 times AA cells                                             |              |

## R&S®RT-ZD02/-ZD08 high voltage differential probes (discontinued products)

All parameters are valid when the probe is connected to an appropriate Rohde & Schwarz oscilloscope with an input impedance of 50  $\Omega$ . See table on page 5 and Rohde & Schwarz oscilloscope operating manual for more details.

|                                    |                                                       | R&S®RT-ZD02            | R&S®RT-ZD08            |
|------------------------------------|-------------------------------------------------------|------------------------|------------------------|
| <b>Step response</b>               |                                                       |                        |                        |
| Rise time                          | 10 % to 90 %                                          | 1.75 ns (meas.)        | 437 ps (meas.)         |
| <b>Frequency response</b>          |                                                       |                        |                        |
| Bandwidth                          | –3 dB, starting at DC, calculated from 0.35/rise time | 200 MHz                | 800 MHz                |
| Common mode rejection              | DC to 100 Hz                                          | 80 dB (meas.)          | 60 dB (meas.)          |
|                                    | 100 Hz to 10 MHz                                      | 50 dB (meas.)          | –                      |
|                                    | 100 Hz to 500 MHz                                     | –                      | 15 dB (meas.)          |
| Noise voltage                      | referenced to probe input                             | 2.6 mV (RMS) (meas.)   | 2.3 mV (RMS) (meas.)   |
| <b>Input impedance</b>             |                                                       |                        |                        |
| DC input resistance                | differential (between signal sockets)                 | 1 M $\Omega$ (meas.)   | 200 k $\Omega$ (meas.) |
|                                    | single-ended (each signal socket to ground)           | 500 k $\Omega$ (meas.) | 100 k $\Omega$ (meas.) |
| Input capacitance                  | differential (between signal sockets)                 | 3.5 pF (meas.)         | 1 pF (meas.)           |
|                                    | single-ended (each signal socket to ground)           | 7 pF (meas.)           | 2 pF (meas.)           |
| <b>DC characteristics</b>          |                                                       |                        |                        |
| Maximum differential input         | between signal sockets                                | $\pm 20$ V             | $\pm 15$ V             |
| Operating voltage window           | each signal socket to ground                          | $\pm 60$ V             | $\pm 30$ V             |
| Attenuation                        |                                                       | 10:1                   | 10:1                   |
| Attenuation error                  | probe only, with ideal 50 $\Omega$ load impedance     | $\pm 1$ % (meas.)      | $\pm 2$ % (meas.)      |
| Zero error                         | at probe output                                       | $\pm 2$ mV (meas.)     | $\pm 5$ mV (meas.)     |
| Base unit input coupling           |                                                       | 50 $\Omega$            |                        |
| <b>Maximum rated input voltage</b> |                                                       |                        |                        |
| DC peak voltage                    | single-ended (each signal socket to ground)           | $\pm 60$ V             | $\pm 40$ V             |
| AC peak voltage                    | single-ended (each signal socket to ground)           | $\pm 60$ V             | $\pm 40$ V             |

## General data

|                             |                                                    | R&S®RT-ZD02                                                  | R&S®RT-ZD08        |
|-----------------------------|----------------------------------------------------|--------------------------------------------------------------|--------------------|
| <b>Temperature</b>          |                                                    |                                                              |                    |
| Temperature loading         | operating temperature range                        | +5 °C to +40 °C                                              |                    |
|                             | storage temperature range,<br>with battery removed | -20 °C to +70 °C                                             |                    |
| Climatic loading            |                                                    | 85 % relative humidity without condensation                  |                    |
| Altitude                    | operation                                          | up to 3000 m                                                 |                    |
|                             | transport                                          | up to 15.300 m                                               |                    |
| <b>Safety</b>               |                                                    | in line with EN 61010-1                                      |                    |
| <b>RoHS</b>                 |                                                    | in line with RoHS Directive 2011/65/EU                       |                    |
| <b>EMC</b>                  |                                                    | in line with EN 61326-1                                      |                    |
| <b>Calibration interval</b> |                                                    | 2 years                                                      |                    |
| <b>Mechanical data</b>      |                                                    |                                                              |                    |
| Dimensions                  | probe head (L × W × H)                             | approx. 111 mm × 22 mm × 14 mm<br>(4.3 in × 0.9 in × 0.6 in) |                    |
|                             | length of probe cable                              | approx. 1.2 m (47 in)                                        |                    |
|                             | length of input leads                              | approx. 15 cm (6 in)                                         | –                  |
| Weight                      | probe only                                         | approx. 170 g (0.37 lb)                                      |                    |
| <b>Probe interface</b>      |                                                    |                                                              |                    |
| Connector                   |                                                    | BNC                                                          |                    |
| Input sockets               | diameter                                           | 4 mm (0.2 in)                                                | 0.635 mm (0.02 in) |
|                             | spacing                                            | 180 mm (7 in)                                                | 2.54 mm (0.1 in)   |
| Supply voltage              |                                                    | 4.5 V to 12 V                                                |                    |
| Supply type                 |                                                    | battery or USB adapter                                       |                    |
| Battery type                |                                                    | 9 V Alkaline battery                                         |                    |
| Battery lifetime            |                                                    | 7.5 h (meas.)                                                | 4.5 h (meas.)      |


## R&S®RT-ZHD07 high voltage differential probe

All parameters are valid when the probe is connected to an appropriate Rohde & Schwarz oscilloscope with an input impedance of 1 M $\Omega$ . See table on page 5 and Rohde & Schwarz oscilloscope operating manual for more details.


|                                    |                                               |                |              |
|------------------------------------|-----------------------------------------------|----------------|--------------|
| Attenuation setting                |                                               | 25:1           | 250:1        |
| Step response                      |                                               |                |              |
| Rise time                          | 10 % to 90 %, both attenuations               | < 2 ns         |              |
| Frequency response                 |                                               |                |              |
| Bandwidth                          | starting at DC, calculated from 0.4/rise time | 200 MHz        |              |
| Common mode rejection <sup>3</sup> | DC to 60 Hz                                   |                |              |
|                                    | +15 °C to +35 °C                              | > 80 dB        |              |
|                                    | 0 °C to +50 °C                                | > 75 dB        |              |
|                                    | 60 Hz to 100 kHz                              | 70 dB (typ.)   | 65 dB (typ.) |
|                                    | 100 kHz to 1 MHz                              | 60 dB (typ.)   | 55 dB (typ.) |
|                                    | 1 MHz to 50 MHz                               | 35 dB (typ.)   | 20 dB (typ.) |
| Input impedance                    |                                               |                |              |
| DC input resistance                | differential (between signal sockets)         | 5 MΩ           |              |
|                                    | single-ended (each signal socket to ground)   | 2.5 MΩ         |              |
| Input capacitance                  | differential (between signal sockets)         | 2.5 pF (meas.) |              |
|                                    | single-ended (each signal socket to ground)   | 5 pF (meas.)   |              |

<sup>3</sup> Valid for probes starting with serial number 200 000. Older probes have lower CMRR performance. For further information, please refer to the manual.

|                                |                                                                         |                                  |                        |
|--------------------------------|-------------------------------------------------------------------------|----------------------------------|------------------------|
| DC characteristics             |                                                                         |                                  |                        |
| Attenuation error              | after applying digital correction factors                               | ±0.5 %                           |                        |
| Temperature drift, attenuation |                                                                         | ±60 ppm/°C                       |                        |
| Zero error                     | after applying digital correction factors,<br>referenced to probe input |                                  |                        |
|                                | +15 °C to +35 °C                                                        | ±12.5 mV                         | ±35 mV                 |
|                                | 0 °C to +50 °C                                                          | ±25 mV                           | ±55 mV                 |
| Temperature drift, zero error  | referenced to probe input                                               | ±0.75 mV/°C                      | ±1.12 mV/°C            |
|                                | referenced to probe output                                              | ±30 µV/°C                        | ±4.5 µV/°C             |
| Dynamic range                  |                                                                         |                                  |                        |
| Differential input             | between signal sockets                                                  | ±75 V                            | ±750 V                 |
| Offset compensation range      | in both attenuations                                                    | ±1000 V                          |                        |
| Offset compensation error      | offset compensation setting = 0 V                                       | no additional error              |                        |
|                                | offset compensation setting ≠ 0 V                                       | ±0.2 % of setting ±40 mV (meas.) |                        |
| Operating voltage window       | each signal socket to ground                                            | ±750 V                           |                        |
| Noise voltage                  | referenced to probe input                                               | 12 mV (RMS)<br>(meas.)           | 40 mV (RMS)<br>(meas.) |
| Maximum rated input voltage    |                                                                         |                                  |                        |
| Continuous voltage             | derated, see figure, each signal socket to ground                       | 300 V (RMS) CAT III              |                        |
|                                |                                                                         | 600 V (RMS) CAT II               |                        |
|                                |                                                                         | 600 V (RMS)                      |                        |
| Transient voltage              | each signal socket to ground                                            | ±4500 V (peak)                   |                        |
| Base unit                      |                                                                         |                                  |                        |
| Input coupling                 | AC/DC                                                                   | 1 MΩ                             |                        |

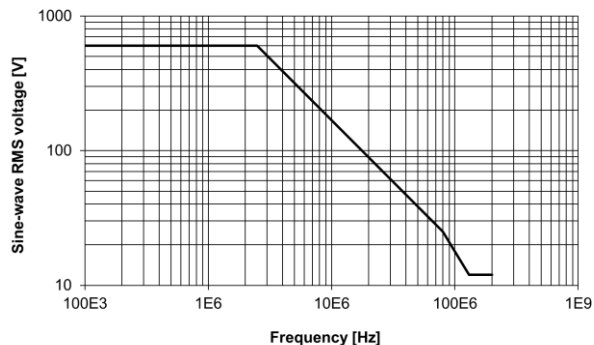

*Maximum rated sine-wave root mean square voltage versus frequency; each signal socket to ground*

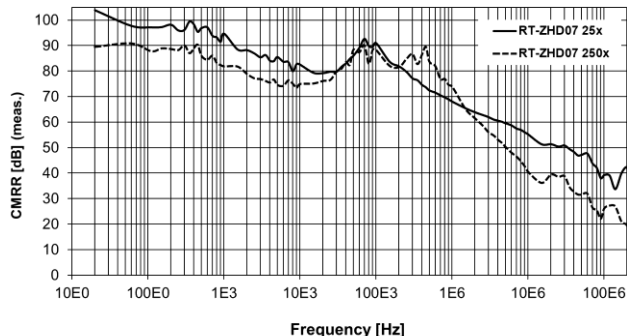

*Measured common mode rejection versus frequency*

## R&S®ProbeMeter

Specifications for measurement error apply only when offset compensation setting is 0 V. The R&S®ProbeMeter can be used to measure differential and common mode voltages.

|                                                         |                                    |                                                        |
|---------------------------------------------------------|------------------------------------|--------------------------------------------------------|
| Measurement error,<br>differential mode and common mode | +15 °C to +35 °C<br>0 °C to +50 °C | ±0.1 % of reading ±0.02 V<br>±0.2 % of reading ±0.04 V |
| Temperature drift                                       |                                    | ±60 ppm/°C of reading ±1 mV/°C                         |
| Common mode rejection,<br>for differential measurement  | +15 °C to +35 °C<br>0 °C to +50 °C | > 80 dB<br>> 75 dB                                     |
| 50 Hz/60 Hz rejection                                   |                                    | > 87 dB                                                |
| Integration time                                        |                                    | 147 ms                                                 |



## General data

|                              |                             |                                                                                                               |
|------------------------------|-----------------------------|---------------------------------------------------------------------------------------------------------------|
| <b>Temperature</b>           |                             |                                                                                                               |
| Temperature loading          | operating temperature range | 0 °C to +50 °C                                                                                                |
|                              | storage temperature range   | –40 °C to +70 °C                                                                                              |
| Climatic loading             |                             | +25 °C/+40 °C cyclic at 95 % relative humidity without condensation, in line with IEC 60068-2-30              |
| Altitude                     | operation                   | up to 3000 m                                                                                                  |
|                              | transport                   | up to 4600 m                                                                                                  |
| <b>Mechanical resistance</b> |                             |                                                                                                               |
| Vibration                    | sinusoidal                  | 5 Hz to 150 Hz, max. 1.8 g at 55 Hz, 0.5 g from 55 Hz to 150 Hz, in line with EN 60068-2-6                    |
|                              | random                      | 8 Hz to 650 Hz, acceleration 1.9 g (RMS), in line with EN 60068-2-64                                          |
| Shock                        |                             | 40 g shock spectrum, in line with MIL-STD-810E                                                                |
| <b>EMC</b>                   |                             | in line with EMC Directive 2014/30/EC, IEC/EN 61326-1 (table 2), IEC/EN 61326-2-1, CISPR 11/EN 55011(class B) |
| <b>Calibration interval</b>  |                             | 2 years                                                                                                       |
| <b>Safety</b>                |                             | in line with IEC/EN 61010-031                                                                                 |
| <b>RoHS</b>                  |                             | in line with RoHS Directive 2011/65/EU                                                                        |

|                        |                                                    |                                                                                                                                                                                                |
|------------------------|----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Mechanical data</b> |                                                    |                                                                                                                                                                                                |
| Dimensions             | probe amplifier box, without protector (W × H × L) | approx. 55 mm × 26 mm × 165 mm<br>(2.17 in × 1.02 in × 6.5 in)                                                                                                                                 |
|                        | cable length                                       |                                                                                                                                                                                                |
|                        | R&S®RT-ZHD15/-ZHD60                                | available options: <ul style="list-style-type: none"> <li>• option 1: approx. 1.3 m (52 in)</li> <li>• option 2: approx. 3.0 m (118 in)</li> <li>• option 3: approx. 4.5 m (177 in)</li> </ul> |
|                        | all other versions                                 | approx. 1.3 m (52 in)                                                                                                                                                                          |
|                        | overall length                                     | approx. 1.6 m (63 in)                                                                                                                                                                          |
| Weight                 | probe amplifier only                               | approx. 360 g (0.8 lb)                                                                                                                                                                         |
| <b>Probe interface</b> |                                                    |                                                                                                                                                                                                |
| Connector              |                                                    | Rohde & Schwarz probe interface                                                                                                                                                                |
| Input sockets          |                                                    | 4 mm                                                                                                                                                                                           |


## R&S®RT-ZHD15/-ZHD16 high voltage differential probe

All parameters are valid when the probe is connected to an appropriate Rohde & Schwarz oscilloscope with an input impedance of 1 MΩ. See table on page 5 and Rohde & Schwarz oscilloscope operating manual for more details.


|                                    |                                               |              |              |
|------------------------------------|-----------------------------------------------|--------------|--------------|
| Attenuation setting                |                                               | 50:1         | 500:1        |
| Step response                      |                                               |              |              |
| Rise time                          | 10 % to 90 %, both attenuations               |              |              |
|                                    | R&S®RT-ZHD15                                  | < 4 ns       |              |
|                                    | R&S®RT-ZHD16                                  | < 2 ns       |              |
| Frequency response                 |                                               |              |              |
| Bandwidth                          | starting at DC, calculated from 0.4/rise time |              |              |
|                                    | R&S®RT-ZHD15                                  | 100 MHz      |              |
|                                    | R&S®RT-ZHD16                                  | 200 MHz      |              |
| Common mode rejection <sup>4</sup> | DC to 60 Hz                                   |              |              |
|                                    | +15 °C to +35 °C                              | > 80 dB      |              |
|                                    | 0 °C to +50 °C                                | > 75 dB      |              |
|                                    | 60 Hz to 100 kHz                              | 70 dB (typ.) | 65 dB (typ.) |
|                                    | 100 kHz to 1 MHz                              | 60 dB (typ.) | 55 dB (typ.) |
|                                    | 1 MHz to 50 MHz                               | 35 dB (typ.) | 20 dB (typ.) |
| Input impedance                    |                                               |              |              |
| DC input resistance                | differential (between signal sockets)         | 10 MΩ        |              |
|                                    | single-ended (each signal socket to ground)   | 5 MΩ         |              |
| Input capacitance                  | differential (between signal sockets)         | 2 pF (meas.) |              |
|                                    | single-ended (each signal socket to ground)   | 4 pF (meas.) |              |

<sup>4</sup> Valid for probes starting with serial number 200 000. Older probes have lower CMRR performance. For further information, please refer to the manual.

| DC characteristics             |                                                                      |                                   |               |
|--------------------------------|----------------------------------------------------------------------|-----------------------------------|---------------|
| Attenuation error              | after applying digital correction factors                            | ±0.5 %                            |               |
| Temperature drift, attenuation |                                                                      | ±60 ppm/°C                        |               |
| Zero error                     | after applying digital correction factors, referenced to probe input |                                   |               |
|                                | +15 °C to +35 °C                                                     | ±25 mV                            | ±65 mV        |
|                                | 0 °C to +50 °C                                                       | ±50 mV                            | ±95 mV        |
| Temperature drift, zero error  | referenced to probe input                                            | ±1.5 mV/°C                        | ±1.75 mV/°C   |
|                                | referenced to probe output                                           | ±30 µV/°C                         | ±3.5 µV/°C    |
| Dynamic range                  |                                                                      |                                   |               |
| Differential input             | between signal sockets                                               | ±150 V                            | ±1500 V       |
| Offset compensation range      | in both attenuations                                                 | ±2000 V                           |               |
| Offset compensation error      | offset compensation setting = 0 V                                    | no additional error               |               |
|                                | offset compensation setting ≠ 0 V                                    | ±0.2 % of setting ± 80 mV (meas.) |               |
| Operating voltage window       | each signal socket to ground                                         | ±1500 V                           |               |
| Noise voltage                  | referenced to probe input, (RMS)                                     |                                   |               |
|                                | R&S®RT-ZHD15                                                         | 20 mV (meas.)                     | 70 mV (meas.) |
|                                | R&S®RT-ZHD16                                                         | 25 mV (meas.)                     | 80 mV (meas.) |
| Maximum rated input voltage    |                                                                      |                                   |               |
| Continuous voltage             | derated, see figure, each signal socket to ground                    | 1000 V (RMS) CAT III              |               |
|                                |                                                                      | 1000 V (RMS)                      |               |
| Transient voltage              | each signal socket to ground                                         | ±6800 V (peak)                    |               |
| Base unit                      |                                                                      |                                   |               |
| Input coupling                 | AC/DC                                                                | 1 MΩ                              |               |

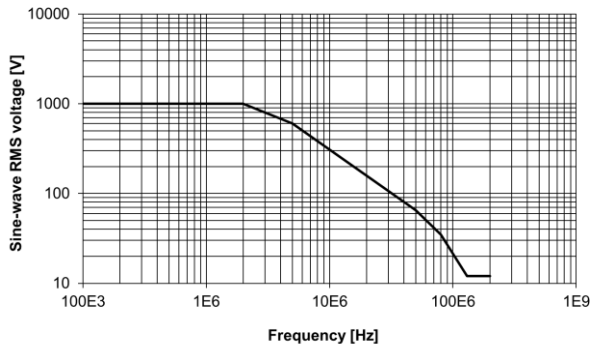

Maximum rated sine-wave root mean square voltage versus frequency; each signal socket to ground

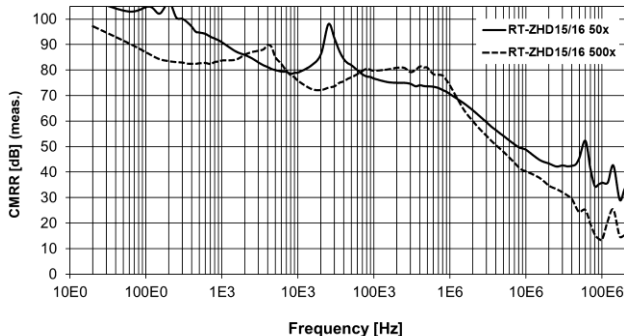

Measured common mode rejection versus frequency

## R&S®ProbeMeter

Specifications for measurement error apply only when offset compensation setting is 0 V. The R&S®ProbeMeter can be used to measure differential and common mode voltages.

|                                                         |                  |                                   |
|---------------------------------------------------------|------------------|-----------------------------------|
| Measurement error,<br>differential mode and common mode | +15 °C to +35 °C |                                   |
|                                                         | ≤ 1000 V         | ±0.1 % of reading ±0.03 V         |
|                                                         | > 1000 V         | ±0.1 % of reading ±0.03 V (meas.) |
|                                                         | 0 °C to +50 °C   |                                   |
|                                                         | ≤ 1000 V         | ±0.2 % of reading ±0.06 V         |
|                                                         | > 1000 V         | ±0.2 % of reading ±0.06 V (meas.) |
| Temperature drift                                       |                  | ±60 ppm/°C of reading ±1.5 mV/°C  |
| Common mode rejection,<br>for differential measurement  | +15 °C to +35 °C | > 80 dB                           |
|                                                         | 0 °C to +50 °C   | > 75 dB                           |
| 50 Hz/60 Hz rejection                                   |                  | > 87 dB                           |
| Integration time                                        |                  | 147 ms                            |

## General data

See page 41.

## R&S®RT-ZHD60 high voltage differential probe


All parameters are valid when the probe is connected to an appropriate Rohde & Schwarz oscilloscope with an input impedance of 1 M $\Omega$ . See table on page 5 and Rohde & Schwarz oscilloscope operating manual for more details.

|                                    |                                               |              |              |
|------------------------------------|-----------------------------------------------|--------------|--------------|
| Attenuation setting                |                                               | 100:1        | 1000:1       |
| Step response                      |                                               |              |              |
| Rise time                          | 10 % to 90 %, both attenuations               | < 4 ns       |              |
| Frequency response                 |                                               |              |              |
| Bandwidth                          | starting at DC, calculated from 0.4/rise time | 100 MHz      |              |
| Common mode rejection <sup>5</sup> | DC to 60 Hz                                   |              |              |
|                                    | +15 °C to +35 °C                              | > 80 dB      |              |
|                                    | 0 °C to +50 °C                                | > 75 dB      |              |
|                                    | 60 Hz to 100 kHz                              | 70 dB (typ.) | 65 dB (typ.) |
|                                    | 100 kHz to 1 MHz                              | 60 dB (typ.) | 55 dB (typ.) |
|                                    | 1 MHz to 50 MHz                               | 35 dB (typ.) | 20 dB (typ.) |
| Input impedance                    |                                               |              |              |
| DC input resistance                | differential (between signal sockets)         | 40 MΩ        |              |
|                                    | single-ended (each signal socket to ground)   | 20 MΩ        |              |
| Input capacitance                  | differential (between signal sockets)         | 2 pF (meas.) |              |
|                                    | single-ended (each signal socket to ground)   | 4 pF (meas.) |              |


<sup>5</sup> Valid for probes starting with serial number 200 000. Older probes have lower CMRR performance. For further information, please refer to the manual.

|                                |                                                                         |                                   |                         |
|--------------------------------|-------------------------------------------------------------------------|-----------------------------------|-------------------------|
| DC characteristics             |                                                                         |                                   |                         |
| Attenuation error              | after applying digital correction factors                               | ±0.5 %                            |                         |
| Temperature drift, attenuation |                                                                         | ±80 ppm/°C                        |                         |
| Zero error                     | after applying digital correction factors,<br>referenced to probe input |                                   |                         |
|                                | +15 °C to +35 °C                                                        | ±90 mV                            | ±150 mV                 |
|                                | 0 °C to +50 °C                                                          | ±150 mV                           | ±230 mV                 |
| Temperature drift, zero error  | referenced to probe input                                               | ±5 mV/°C                          | ±5.5 mV/°C              |
|                                | referenced to probe output                                              | ±50 µV/°C                         | ±5.5 µV/°C              |
| Dynamic range                  |                                                                         |                                   |                         |
| Differential input             | between signal sockets                                                  | ±600 V                            | ±6000 V                 |
| Offset compensation range      | in both attenuations                                                    | ±2000 V                           |                         |
| Offset compensation error      | offset compensation setting = 0 V                                       | no additional error               |                         |
|                                | offset compensation setting ≠ 0 V                                       | ±0.2 % of setting ±100 mV (meas.) |                         |
| Operating voltage window       | each signal socket to ground                                            | ±6000 V                           |                         |
| Noise voltage                  | referenced to probe input                                               | 70 mV (RMS)<br>(meas.)            | 280 mV (RMS)<br>(meas.) |
| Maximum rated input voltage    |                                                                         |                                   |                         |
| Continuous voltage             | derated, see figure, each signal socket to ground                       | 1000 V (RMS) CAT III              |                         |
|                                |                                                                         | 1750 V (RMS)                      |                         |
| Transient voltage              | each signal socket to ground                                            | ±6800 V (peak)                    |                         |
| Base unit                      |                                                                         |                                   |                         |
| Input coupling                 | AC/DC                                                                   | 1 MΩ                              |                         |



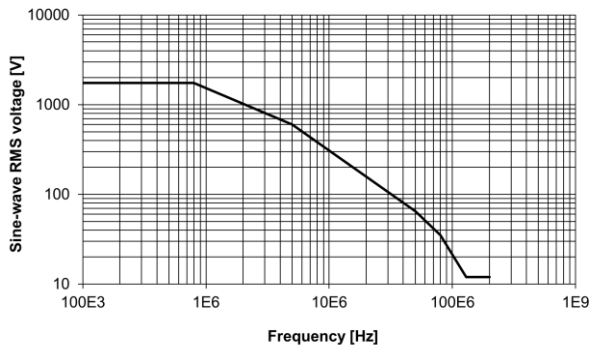

*Maximum rated sine-wave root mean square voltage versus frequency; each signal socket to ground*

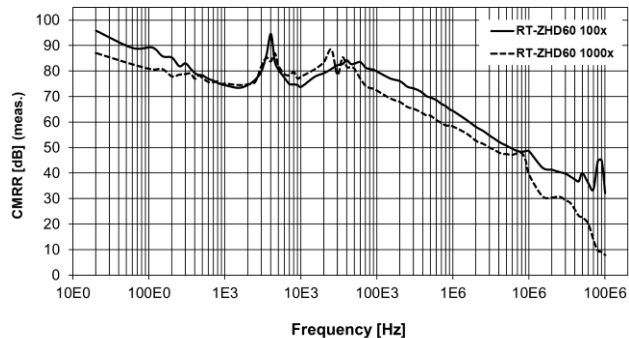

*Measured common mode rejection versus frequency*

## R&S®ProbeMeter

Specifications for measurement error apply only when offset compensation setting is 0 V. The R&S®ProbeMeter can be used to measure differential and common mode voltages.

|                                                         |                  |                                   |
|---------------------------------------------------------|------------------|-----------------------------------|
| Measurement error,<br>differential mode and common mode | +15 °C to +35 °C |                                   |
|                                                         | ≤ 1000 V         | ±0.12 % of reading ±0.1 V         |
|                                                         | > 1000 V         | ±0.12 % of reading ±0.1 V (meas.) |
|                                                         | 0 °C to +50 °C   |                                   |
|                                                         | ≤ 1000 V         | ±0.25 % of reading ±0.2 V         |
|                                                         | > 1000 V         | ±0.25 % of reading ±0.2 V (meas.) |
| Temperature drift                                       |                  | ±80 ppm/°C of reading ±4.5 mV/°C  |
| Common mode rejection,<br>for differential measurement  | +15 °C to +35 °C | > 80 dB                           |
|                                                         | 0 °C to +50 °C   | > 75 dB                           |
| 50 Hz/60 Hz rejection                                   |                  | > 87 dB                           |
| Integration time                                        |                  | 147 ms                            |

## General data

See page 41.

## R&S®RT-ZC02/-ZC03 current probes


All parameters are valid when the probe is connected to an appropriate Rohde & Schwarz oscilloscope with an input impedance of 1 M $\Omega$ . See table on page 5 and Rohde & Schwarz oscilloscope operating manual for more details.

|                                |                                                                   |                     |                     |
|--------------------------------|-------------------------------------------------------------------|---------------------|---------------------|
|                                |                                                                   | R&S®RT-ZC02         |                     |
| Sensitivity setting            |                                                                   | 0.01 V/A            | 0.001 V/A           |
| Step response                  |                                                                   |                     |                     |
| Rise time                      | 10 % to 90 %                                                      | 20 µs (meas.)       |                     |
| Frequency response             |                                                                   |                     |                     |
| Bandwidth                      | –3 dB, starting at DC                                             | 20 kHz (meas.)      |                     |
| DC characteristics             |                                                                   |                     |                     |
| Dynamic range                  | derated, see figures on page 54                                   | ±200 A              | ±2000 A             |
| Sensitivity error              | +23 °C ±1 °C, ±1500 A                                             | ±1 % (meas.)        |                     |
|                                | +23 °C ±1 °C, ±2000 A                                             | ±5 % (meas.)        |                     |
| Temperature drift, sensitivity |                                                                   | ±0.15 %/°C (meas.)  |                     |
| Zero error                     | referenced to probe input after demagnetizing and zero adjustment | ±100 mA (meas.)     | ±500 mA (meas.)     |
| AC characteristics             |                                                                   |                     |                     |
| Maximum slew rate              |                                                                   | ±20 A/µs (meas.)    |                     |
| Maximum rated input            |                                                                   |                     |                     |
| Maximum continuous current     |                                                                   | 1000 A (RMS)        |                     |
| Maximum working voltage        | for uninsulated conductors                                        | 300 V (RMS) CAT III |                     |
| Other                          |                                                                   |                     |                     |
| Noise                          | with 20 MHz lowpass filter                                        | 30 mA (RMS) (meas.) | 80 mA (RMS) (meas.) |
| Base unit                      |                                                                   |                     |                     |
| Input coupling                 |                                                                   | 1 MΩ                |                     |

|                                |                                                                   |                             |
|--------------------------------|-------------------------------------------------------------------|-----------------------------|
|                                |                                                                   | <b>R&amp;S®RT-ZC03</b>      |
| <b>Step response</b>           |                                                                   |                             |
| Rise time                      | 10 % to 90 %                                                      | 1 $\mu$ s (meas.)           |
| <b>Frequency response</b>      |                                                                   |                             |
| Bandwidth                      | –0.5 dB, starting at DC                                           | 100 kHz (meas.)             |
| <b>DC characteristics</b>      |                                                                   |                             |
| Dynamic range                  | derated, see figures on page 54                                   | $\pm 30$ A                  |
| Sensitivity                    |                                                                   | 0.1 V/A                     |
| Sensitivity error              | +23 °C $\pm 1$ °C                                                 | $\pm 1$ % (meas.)           |
| Temperature drift, sensitivity |                                                                   | $\pm 0.01$ %/°C (meas.)     |
| Zero error                     | referenced to probe input after demagnetizing and zero adjustment | $\pm 2$ mA (meas.)          |
| <b>AC characteristics</b>      |                                                                   |                             |
| Maximum slew rate              |                                                                   | $\pm 20$ A/ $\mu$ s (meas.) |
| <b>Maximum rated input</b>     |                                                                   |                             |
| Maximum continuous current     |                                                                   | 20 A (RMS)                  |
| Maximum working voltage        | for uninsulated conductors                                        | 300 V (RMS) CAT III         |
| <b>Other</b>                   |                                                                   |                             |
| Noise                          | with 20 MHz lowpass filter                                        | 2 mA (RMS) (meas.)          |
| <b>Base unit</b>               |                                                                   |                             |
| Input coupling                 |                                                                   | 1 M $\Omega$                |

## General data

|                             |                                                    | R&S®RT-ZC02                                                                                    | R&S®RT-ZC03            |
|-----------------------------|----------------------------------------------------|------------------------------------------------------------------------------------------------|------------------------|
| <b>Temperature</b>          |                                                    |                                                                                                |                        |
| Temperature loading         | operating temperature range                        | 0 °C to +50 °C                                                                                 |                        |
|                             | storage temperature range,<br>with battery removed | -20 °C to +85 °C                                                                               |                        |
| Climatic loading            |                                                    | 80 % relative humidity for temperatures up to +31 °C,<br>decreasing linearly to 40 % at +50 °C |                        |
| Altitude                    | operation                                          | up to 2000 m                                                                                   |                        |
| <b>Safety</b>               |                                                    | in line with EN 61010-1<br>in line with EN 61010-2-032 (pollution degree 2)                    |                        |
| <b>RoHS</b>                 |                                                    | in line with RoHS Directive 2011/65/EU                                                         |                        |
| <b>EMC</b>                  |                                                    | in line with EN 61326-2-2                                                                      |                        |
| <b>Calibration interval</b> |                                                    | 2 years                                                                                        |                        |
| <b>Mechanical data</b>      |                                                    |                                                                                                |                        |
| Dimensions                  | diameter of probe tip                              | approx. 32 mm (1.3 in)                                                                         | approx. 25 mm (1.0 in) |
|                             | cable length                                       | approx. 2.0 m (79 in)                                                                          |                        |
| Weight                      | probe only                                         | approx. 320 g (0.7 lb)                                                                         |                        |
| <b>Probe interface</b>      |                                                    |                                                                                                |                        |
| Connector                   |                                                    | BNC                                                                                            |                        |
| Battery type                |                                                    | 9 V Alkaline battery, PP3,<br>MN 1604 or IEC6LR61                                              |                        |
| Battery lifetime            |                                                    | 50 h (meas.)                                                                                   | 25 h (meas.)           |

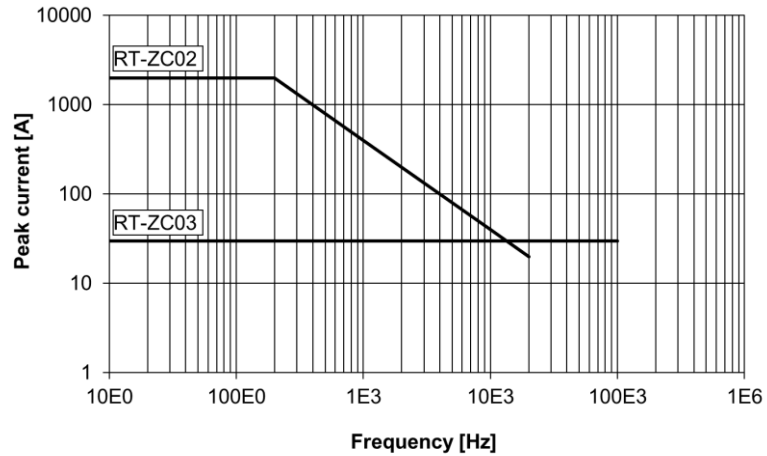

*Maximum rated peak input current versus frequency*

## R&S®RT-ZC05B/-ZC10(B)/-ZC15B/-ZC20(B)/-ZC30 current probes

All parameters are valid when the probe is connected to an appropriate Rohde & Schwarz oscilloscope with an input impedance of 1 MΩ. See table on page 5 and Rohde & Schwarz oscilloscope operating manual for more details.

|                                                      |                                                                   | R&S®RT-ZC05B                   | R&S®RT-ZC10(B)                 |
|------------------------------------------------------|-------------------------------------------------------------------|--------------------------------|--------------------------------|
| <b>Step response</b>                                 |                                                                   |                                |                                |
| Rise time                                            | 10 % to 90 %, calculated from bandwidth                           | 175 ns                         | 35 ns                          |
| Propagation delay                                    |                                                                   | 100 ns (meas.)                 | 36 ns (meas.)                  |
| <b>Frequency response</b>                            |                                                                   |                                |                                |
| Bandwidth                                            | –3 dB, starting at DC                                             | > 2 MHz                        | > 10 MHz                       |
| <b>Input impedance</b>                               |                                                                   | see figure on page 62          |                                |
| <b>DC characteristics</b>                            |                                                                   |                                |                                |
| Sensitivity                                          |                                                                   | 0.01 V/A                       |                                |
| Sensitivity error                                    | +23 °C ±3 °C                                                      | ±1 %                           |                                |
| Zero error                                           | referenced to probe input after demagnetizing and zero adjustment | ±500 mA (meas.)                | ±100 mA (meas.)                |
| <b>AC characteristics</b>                            |                                                                   |                                |                                |
| AC sensitivity error<br>(sinusoidal, 45 Hz to 66 Hz) | +23 °C ±3 °C                                                      | ±1 % ± 500 mA (RMS)            | ±1 % ± 100 mA (RMS)            |
|                                                      | 0 °C to +40 °C                                                    | ±3 % ± 500 mA (RMS)<br>(meas.) | ±3 % ± 100 mA (RMS)<br>(meas.) |
| Measurement due to external magnetic fields          | 400 A/m magnetic field, DC or 60 Hz, referenced to probe input    | < 800 mA (RMS) (meas.)         | < 150 mA (RMS) (meas.)         |
| <b>Maximum rated input</b>                           |                                                                   |                                |                                |
| Maximum continuous current                           | derated, see figures on page 62                                   | 500 A (RMS)                    | 150 A (RMS)                    |
| Maximum transient current                            | peak                                                              | ±700 A                         | ±300 A                         |
| <b>Other</b>                                         |                                                                   |                                |                                |
| Noise                                                | 20 MHz measurement bandwidth, referenced to probe input           | 25 mA (RMS) (meas.)            |                                |


|                                                      |                                                                   | R&S®RT-ZC15B               | R&S®RT-ZC20(B)       |
|------------------------------------------------------|-------------------------------------------------------------------|----------------------------|----------------------|
| <b>Step response</b>                                 |                                                                   |                            |                      |
| Rise time                                            | 10 % to 90 %, calculated from bandwidth                           | 7 ns                       | 3.5 ns               |
| Propagation delay                                    |                                                                   | 16.5 ns (meas.)            | 14.8 ns (meas.)      |
| <b>Frequency response</b>                            |                                                                   |                            |                      |
| Bandwidth                                            | –3 dB, starting at DC                                             | > 50 MHz                   | > 100 MHz            |
| <b>Input impedance</b>                               |                                                                   | see figure on page 62      |                      |
| <b>DC characteristics</b>                            |                                                                   |                            |                      |
| Sensitivity                                          |                                                                   | 0.1 V/A                    |                      |
| Sensitivity error                                    | +23 °C ±3 °C                                                      | ±1 %                       |                      |
| Zero error                                           | referenced to probe input after demagnetizing and zero adjustment | ±10 mA (meas.)             |                      |
| <b>AC characteristics</b>                            |                                                                   |                            |                      |
| AC sensitivity error<br>(sinusoidal, 45 Hz to 66 Hz) | +23 °C ±3 °C                                                      | ±1 % ± 10 mA (RMS)         |                      |
|                                                      | 0 °C to +40 °C                                                    | ±3 % ± 10 mA (RMS) (meas.) |                      |
| Measurement due to external magnetic fields          | 400 A/m magnetic field, DC or 60 Hz, referenced to probe input    | < 20 mA (RMS) (meas.)      | < 5 mA (RMS) (meas.) |
| <b>Maximum rated input</b>                           |                                                                   |                            |                      |
| Maximum continuous current                           | derated, see figures on page 62                                   | 30 A (RMS)                 |                      |
| Maximum transient current                            | peak                                                              | ±50 A                      |                      |
| <b>Other</b>                                         |                                                                   |                            |                      |
| Noise                                                | 20 MHz measurement bandwidth, referenced to probe input           | 2.5 mA (RMS) (meas.)       |                      |




|                                                      |                                                                      | <b>R&amp;S®RT-ZC30</b>   |
|------------------------------------------------------|----------------------------------------------------------------------|--------------------------|
| <b>Step response</b>                                 |                                                                      |                          |
| Rise time                                            | 10 % to 90 %, calculated from bandwidth                              | 2.9 ns                   |
| <b>Frequency response</b>                            |                                                                      |                          |
| Bandwidth                                            | –3 dB, starting at DC                                                | > 120 MHz                |
| <b>Input impedance</b>                               |                                                                      | see figure on page 62    |
| <b>DC characteristics</b>                            |                                                                      |                          |
| Sensitivity                                          |                                                                      | 1 V/A                    |
| Sensitivity error                                    | +23 °C ±3 °C                                                         | ±3 %                     |
| Zero error                                           | referenced to probe input<br>after demagnetizing and zero adjustment | ±1 mA (meas.)            |
| <b>AC characteristics</b>                            |                                                                      |                          |
| AC measurement error<br>(sinusoidal, 45 Hz to 66 Hz) | +23 °C ±3 °C                                                         | ±3 % ±1 mA (RMS)         |
|                                                      | 0 °C to +40 °C                                                       | ±5 % ±1 mA (RMS) (meas.) |
| Measurement due to external<br>magnetic fields       | 400 A/m magnetic field, DC or 60 Hz,<br>referenced to probe input    | < 5 mA (RMS) (meas.)     |
| <b>Maximum rated input</b>                           |                                                                      |                          |
| Maximum continuous current                           | derated, see figures on page 62                                      | 5 A (RMS)                |
| Maximum transient current                            | peak                                                                 | ±7.5 A                   |
| <b>Other</b>                                         |                                                                      |                          |
| Noise                                                | 30 MHz measurement bandwidth,<br>referenced to probe input           | 60 µA (RMS) (meas.)      |

## General data


|                      |                                              | R&S®RT-ZC05B/<br>R&S®RT-ZC10(B)                                             | R&S®RT-ZC15B/<br>R&S®RT-ZC20(B)/<br>R&S®RT-ZC30         |
|----------------------|----------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------|
| Temperature          |                                              |                                                                             |                                                         |
| Temperature loading  | operating temperature range                  | 0 °C to +40 °C                                                              |                                                         |
|                      | storage temperature range                    | -10 °C to +50 °C                                                            |                                                         |
| Climatic loading     |                                              | 80 % relative humidity                                                      |                                                         |
| Altitude             | operation                                    | up to 2000 m                                                                |                                                         |
| Safety               |                                              | in line with EN 61010-2-032<br>(type D sensor, insulated conductor only)    |                                                         |
| RoHS                 |                                              | in line with RoHS Directive 2011/65/EU                                      |                                                         |
| EMC                  |                                              | in line with<br>EN 61326-1, CISPR 11/EN 55011 (class B, table 2)            |                                                         |
| Calibration interval |                                              | 2 years                                                                     |                                                         |
| Mechanical data      |                                              |                                                                             |                                                         |
| Dimensions           | max. conductor diameter                      | approx. 20 mm (0.79 in)                                                     | approx. 5 mm (0.2 in)                                   |
|                      | cable length, probe                          | approx. 2 m (78.7 in)                                                       | approx. 1.5 m (59 in)                                   |
|                      | cable length, power supply of<br>R&S®RT-ZCxx | approx. 1 m (39.4 in)                                                       | approx. 1 m (39.4 in)                                   |
|                      | probe head (W × H × L, approx.)              | 27 mm × 69 mm × 176 mm<br>(1.06 in × 2.72 in × 6.93 in)                     | 18 mm × 40 mm × 175 mm<br>(0.71 in × 1.57 in × 6.89 in) |
| Weight               | probe only                                   | approx. 500 g (1.1 lb)                                                      | approx. 240 g (0.53 lb)                                 |
| Probe interface      |                                              |                                                                             |                                                         |
| Connector            | R&S®RT-ZCxx                                  | BNC                                                                         |                                                         |
|                      | R&S®RT-ZCxxB                                 | Rohde & Schwarz probe interface                                             |                                                         |
| Supply voltage       | R&S®RT-ZCxx                                  | external power supply necessary (e.g. R&S®RT-ZA13)<br>±12 V ± 0.5 V (5.5 W) |                                                         |
|                      | R&S®RT-ZCxxB                                 | power supply by Rohde & Schwarz probe interface                             |                                                         |

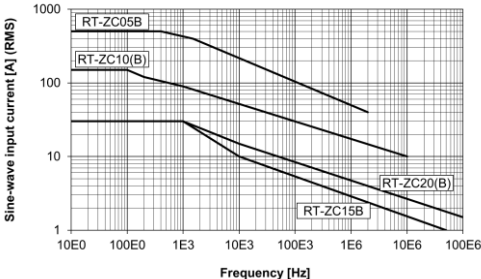


Maximum rated sine-wave root mean square input current  
versus frequency

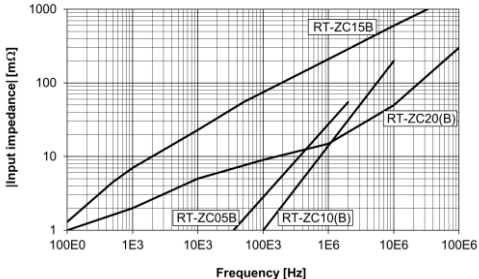

Input impedance (meas.)

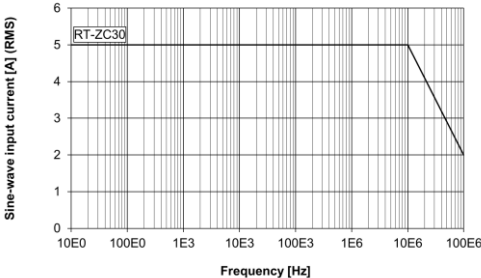

Maximum rated sine-wave root mean square input current  
versus frequency

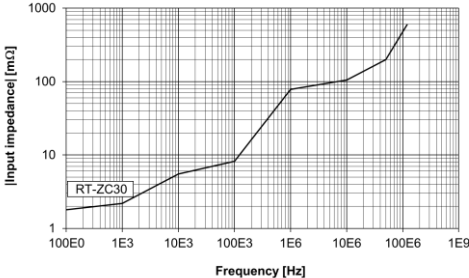

Input impedance (meas.)

## R&S®RT-ZC31 current probe


All parameters are valid when the probe is connected to an appropriate Rohde & Schwarz oscilloscope with an input impedance of 1 M $\Omega$ . See table on page 5 and Rohde & Schwarz oscilloscope operating manual for more details.

|                                                      |                                                                      | <b>R&amp;S®RT-ZC31</b>         |                               |                               |
|------------------------------------------------------|----------------------------------------------------------------------|--------------------------------|-------------------------------|-------------------------------|
| <b>Sensitivity setting</b>                           |                                                                      | 0.1 V/A                        | 1 V/A                         | 10 V/A                        |
| <b>Step response</b>                                 |                                                                      |                                |                               |                               |
| Rise time                                            | 10 % to 90 %, calculated from bandwidth                              | 2.9 ns                         |                               |                               |
| Propagation delay                                    |                                                                      | 12 ns (meas.)                  | 12 ns (meas.)                 | 13 ns (meas.)                 |
| <b>Frequency response</b>                            |                                                                      |                                |                               |                               |
| Bandwidth                                            | –3 dB, starting at DC                                                | > 120 MHz                      |                               |                               |
| <b>Input impedance</b>                               |                                                                      | see figure on page 62          |                               |                               |
| <b>DC characteristics</b>                            |                                                                      |                                |                               |                               |
| Sensitivity error                                    | +23 °C $\pm$ 5 °C                                                    | $\pm$ 3 %, $\pm$ 1 % (meas.)   |                               |                               |
| Zero error                                           | referenced to probe input<br>after demagnetizing and zero adjustment | $\pm$ 10 mA<br>(meas.)         | $\pm$ 1 mA<br>(meas.)         | $\pm$ 1 mA<br>(meas.)         |
| <b>AC characteristics</b>                            |                                                                      |                                |                               |                               |
| AC measurement error<br>(sinusoidal, 45 Hz to 66 Hz) | +23 °C $\pm$ 5 °C                                                    | $\pm$ 3 %<br>$\pm$ 10 mA (RMS) | $\pm$ 3 %<br>$\pm$ 1 mA (RMS) | $\pm$ 3 %<br>$\pm$ 1 mA (RMS) |
|                                                      | (meas.)                                                              | $\pm$ 1 %<br>$\pm$ 10 mA (RMS) | $\pm$ 1 %<br>$\pm$ 1 mA (RMS) | $\pm$ 1 %<br>$\pm$ 1 mA (RMS) |
| Measurement due to external<br>magnetic fields       | 400 A/m magnetic field, DC or 60 Hz,<br>referenced to probe input    | < 5 mA (RMS) (meas.)           |                               |                               |
| <b>Maximum rated input</b>                           |                                                                      |                                |                               |                               |
| Maximum continuous current                           | derated, see figures on page 62                                      | 30 A (RMS)                     | 5 A (RMS)                     | 0.5 A (RMS)                   |
| Maximum transient current                            | peak, input for max. 2 s                                             | $\pm$ 50 A                     | $\pm$ 7.5 A                   | $\pm$ 0.75 A                  |
| <b>Other</b>                                         |                                                                      |                                |                               |                               |
| Noise                                                | 20 MHz measurement bandwidth,<br>referenced to probe input           |                                |                               | 60 $\mu$ A (RMS)<br>(meas.)   |


## General data

|                             |                                             | R&S®RT-ZC31                                                              |
|-----------------------------|---------------------------------------------|--------------------------------------------------------------------------|
| <b>Temperature</b>          |                                             |                                                                          |
| Temperature loading         | operating temperature range                 | 0 °C to +40 °C                                                           |
|                             | storage temperature range                   | −10 °C to +50 °C                                                         |
| Climatic loading            |                                             | 80 % relative humidity                                                   |
| Altitude                    | operation                                   | up to 2000 m                                                             |
| <b>Safety</b>               |                                             | in line with EN 61010-2-032<br>(type D sensor, insulated conductor only) |
| <b>RoHS</b>                 |                                             | in line with RoHS Directive 2011/65/EU                                   |
| <b>EMC</b>                  |                                             | in line with<br>EN 61326-1, CISPR 11/EN 55011 (class B, table 2)         |
| <b>Calibration interval</b> |                                             | 2 years                                                                  |
| <b>Mechanical data</b>      |                                             |                                                                          |
| Dimensions                  | max. conductor diameter                     | approx. 5 mm (0.2 in)                                                    |
|                             | cable length, probe cord                    | approx. 1.5 m (59.6 in)                                                  |
|                             | cable length, junction box to interface box | approx. 0.15 m (6.0 in)                                                  |
|                             | cable length, power cord                    | approx. 1 m (39.4 in)                                                    |
|                             | probe head (W × H × L)                      | approx. 18 mm × 26 mm × 155 mm<br>(0.71 in × 1.02 in × 6.10 in)          |
|                             | junction box (W × H × L)                    | approx. 45 mm × 25 mm × 120 mm<br>(1.77 in × 0.98 in × 4.72 in)          |
|                             | interface box (W × H × L)                   | approx. 29 mm × 40 mm × 83 mm<br>(1.14 in × 1.57 in × 3.27 in)           |
| Weight                      | probe only                                  | approx. 370 g (0.82 lb)                                                  |

| Probe interface |  |                                                                                                       |
|-----------------|--|-------------------------------------------------------------------------------------------------------|
| Connector       |  | BNC                                                                                                   |
| Supply voltage  |  | external power supply necessary<br>(e.g. R&S®RT-ZA13)<br>$\pm 12 \text{ V} \pm 0.5 \text{ V}$ (7.8 W) |

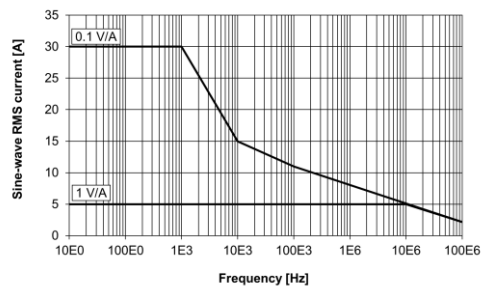

Maximum rated sine-wave root mean square input current versus frequency

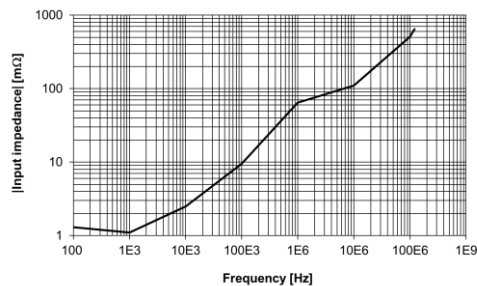

Input impedance (meas.)

## R&S®RT-ZA13 probe power supply

| <b>Electrical data</b>    |                           |                                      |
|---------------------------|---------------------------|--------------------------------------|
| Number of channels        |                           | 4                                    |
| Output voltage            |                           | $\pm 12 \text{ V} \pm 0.5 \text{ V}$ |
| Maximum output current    | sum total of all channels | 2.5 A                                |
| Power requirements        |                           | 100 V to 240 V, 50 Hz/60 Hz          |
| Maximum rated input power |                           | 170 W                                |

### General data

| <b>Safety</b>          |           | in line with EN 61010-1                                                    |
|------------------------|-----------|----------------------------------------------------------------------------|
| <b>RoHS</b>            |           | in line with RoHS Directive 2011/65/EU                                     |
| <b>EMC</b>             |           | in line with EN 61326-1 (class B equipment),<br>EN 61000-3-2, EN 61000-3-3 |
| <b>Mechanical data</b> |           |                                                                            |
| Dimensions             | W × H × L | approx. 80 mm × 119 mm × 200 mm<br>(3.1 in × 4.7 in × 7.9 in)              |
| Weight                 |           | approx. 1.1 kg (2.4 lb)                                                    |
| Connector              |           | LEMO FFA.OS.304.CLAC44Z                                                    |

## Ordering information

| Designation                                                                                                                                                                                                                                                                                                                                                                                                                    | Type         | Order No.    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------|
| <b>High voltage passive probes</b>                                                                                                                                                                                                                                                                                                                                                                                             |              |              |
| 250 MHz high voltage probe, passive, 100:1, 100 M $\Omega$ , 6.5 pF, 850 V (RMS)<br>Incl. adjustment tool; coding clips (set) 2 $\times$ 4 colors; signal pin (2); sprung hook 5 mm;<br>ground lead 14 cm; insulating cap; protective cap; operating manual                                                                                                                                                                    | R&S®RT-ZH03  | 1333.0873.02 |
| 400 MHz high voltage probe, passive, 100:1, 50 M $\Omega$ , 7.5 pF, 1 kV (RMS)<br>Incl. adjustment tool; BNC adapter 5.0-L; coding rings (set) 3 $\times$ 4 colors;<br>flexible adapter 5.0-L; ground lead 22 cm (2); ground lead 22 cm to 4 mm banana plug;<br>insulating cap 5.0-L; operating manual; protection cap 5.0-L; safety alligator clip (2);<br>solid tip 0.8 mm (5); spring tip 0.8 mm (5); sprung hook 5.0-L (2) | R&S®RT-ZH10  | 1409.7720.02 |
| 400 MHz high voltage probe, passive, 1000:1, 50 M $\Omega$ , 7.5 pF, 1 kV (RMS)<br>See R&S®RT-ZH10 for equipment included                                                                                                                                                                                                                                                                                                      | R&S®RT-ZH11  | 1409.7737.02 |
| 500 MHz isolated probe, passive, 10:1, 10 M $\Omega$ , 12 pF, 1 kV (RMS) CAT III<br>Incl. coding rings (set) 5 $\times$ 2 colors; ground lead 32 cm with safety alligator clip;<br>sprung hook; ground pin; operating manual                                                                                                                                                                                                   | R&S®RT-ZI10  | 1326.1761.02 |
| 500 MHz isolated probe, passive, 10:1, 10 M $\Omega$ , 11 pF, 300 V (RMS) CAT III<br>Incl. coding rings (set) 5 $\times$ 2 colors; ground lead with safety alligator clip; sprung hook;<br>ground pin; BNC adapter, operating manual                                                                                                                                                                                           | R&S®RT-ZI10C | 1326.3106.02 |
| 500 MHz isolated probe, passive, 100:1, 100 M $\Omega$ , 4.6 pF, 1 kV (RMS) CAT III<br>Incl. coding rings (set) 5 $\times$ 2 colors; ground lead 32 cm with safety alligator clip;<br>sprung hook; ground pin; operating manual                                                                                                                                                                                                | R&S®RT-ZI11  | 1326.1810.02 |



| Designation                                                                                                                                                                                                     | Type          | Order No.    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------|
| <b>Differential probes</b>                                                                                                                                                                                      |               |              |
| Isolated probing system, $\pm 30$ V, 1 kV (RMS) CAT III (depending on tip module), Rohde & Schwarz probe interface and BNC;<br>Incl. carrying case; operating manual                                            | R&S®RT-ZISO   | 1804.5000K02 |
| MMCX 1.5:1, 50 $\Omega$ , tip module for R&S®RT-ZISO, 8 V (RMS), $\pm 45$ V (peak), 1 kV (RMS) CAT III                                                                                                          | R&S®ZISO-Z101 | 1803.4100.02 |
| MMCX 10:1, 10 M $\Omega$ , tip module for R&S®RT-ZISO, $\pm 300$ V (peak), 1 kV (RMS) CAT III                                                                                                                   | R&S®ZISO-Z201 | 1803.4200.02 |
| SQPIN 25:1, 10 M $\Omega$ , tip module for R&S®RT-ZISO, $\pm 750$ V (peak), 1 kV (RMS) CAT III                                                                                                                  | R&S®ZISO-Z202 | 1803.4300.02 |
| WSQPIN 100:1, 40 M $\Omega$ , tip module for R&S®RT-ZISO, $\pm 3$ kV (peak), 1 kV (RMS) CAT III                                                                                                                 | R&S®ZISO-Z203 | 1803.4400.02 |
| Browser 10:1 10 M $\Omega$ , tip module for R&S®RT-ZISO, $\pm 300$ V (peak), 300 V (RMS) CAT III                                                                                                                | R&S®ZISO-Z301 | 1803.4500.02 |
| Browser 100:1 100 M $\Omega$ , tip module for R&S®RT-ZISO, $\pm 3$ kV (peak), 1 kV (RMS) CAT III                                                                                                                | R&S®ZISO-Z302 | 1803.4600.02 |
| 25 MHz differential probe, $\pm 700$ V, 1 kV (RMS) CAT III, BNC<br>Incl. sprung hook 4 mm (red, black); safety alligator clip 4 mm (red, black); USB power cord; trimming tool; operating manual                | R&S®RT-ZD002  | 1337.9700.02 |
| 25 MHz differential probe, $\pm 1.4$ kV, 1 kV (RMS) CAT III, BNC<br>Incl. sprung hook 4 mm (red, black); safety alligator clip 4 mm (red, black); USB power cord; trimming tool; operating manual               | R&S®RT-ZD003  | 1337.9800.02 |
| 200 MHz differential probe, $\pm 20$ V, BNC<br>Incl. safety alligator clip 4 mm (2); sprung hook 4 mm (2); USB power cord; 9 V battery; carrying case; operating manual                                         | R&S®RT-ZD02   | 1333.0821.02 |
| 800 MHz differential probe, $\pm 15$ V, BNC<br>Incl. lead 11 cm (2); lead 7 cm (2); signal pin (6); dual pin (4); mini clip (2); micro clip (2); USB power cord; 9 V battery; carrying case; operating manual   | R&S®RT-ZD08   | 1333.0838.02 |
| 200 MHz differential probe, $\pm 750$ V, 600 V (RMS) CAT II, Rohde & Schwarz probe interface<br>Incl. R&S®RT-ZA24 accessory kit; R&S®RT-ZA22 test leads; R&S®RT-ZHD protector; carrying case; operating manual  | R&S®RT-ZHD07  | 1800.2307K02 |
| 100 MHz differential probe, $\pm 1.5$ kV, 1 kV (RMS) CAT III, Rohde & Schwarz probe interface<br>Incl. R&S®RT-ZA24 accessory kit; R&S®RT-ZA22 test leads; R&S®RT-ZHD protector; carrying case; operating manual | R&S®RT-ZHD15  | 1800.2107K02 |

| Designation                                                                                                                                                                                                        | Type         | Order No.    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------|
| 200 MHz differential probe, $\pm 1.5$ kV, 1 kV (RMS) CAT III, Rohde & Schwarz probe interface<br>Incl. R&S®RT-ZA24 accessory kit; R&S®RT-ZA22 test leads; R&S®RT-ZHD protector;<br>carrying case; operating manual | R&S®RT-ZHD16 | 1800.2207K02 |
| 100 MHz differential probe, $\pm 6$ kV, 1 kV (RMS) CAT III, Rohde & Schwarz probe interface<br>Incl. R&S®RT-ZA24 accessory kit; R&S®RT-ZA22 test leads; R&S®RT-ZHD protector;<br>carrying case; operating manual   | R&S®RT-ZHD60 | 1800.2007K02 |
| <b>Current probes</b>                                                                                                                                                                                              |              |              |
| 20 kHz current probe, AC/DC, 0.01/0.001 V/A, 1000 A, 300 V (RMS) CAT III, BNC<br>Incl. operating manual                                                                                                            | R&S®RT-ZC02  | 1333.0850.02 |
| 100 kHz current probe, AC/DC, 0.1 V/A, 30 A, 300 V (RMS) CAT III, BNC<br>Incl. operating manual                                                                                                                    | R&S®RT-ZC03  | 1333.0844.02 |
| 10 MHz current probe, AC/DC, 0.01 V/A, 150 A (RMS), BNC<br>Incl. carrying case; operating manual                                                                                                                   | R&S®RT-ZC10  | 1409.7750K02 |
| 100 MHz current probe, AC/DC, 0.1 V/A, 30 A (RMS), BNC<br>Incl. carrying case; operating manual                                                                                                                    | R&S®RT-ZC20  | 1409.7766K02 |
| 120 MHz current probe, AC/DC, 1 V/A, 5 A (RMS), BNC<br>Incl. carrying case; operating manual                                                                                                                       | R&S®RT-ZC30  | 1409.7772K02 |
| 120 MHz current probe, AC/DC, 0.1 V/A / 1 V/A / 10 V/A, 30 A (RMS), BNC<br>Incl. carrying case; operating manual                                                                                                   | R&S®RT-ZC31  | 1801.4932K02 |
| 2 MHz current probe, AC/DC, 0.01 V/A, 500 A (RMS), Rohde & Schwarz probe interface<br>Incl. carrying case; operating manual                                                                                        | R&S®RT-ZC05B | 1409.8204.02 |
| 10 MHz current probe, AC/DC, 0.01 V/A, 150 A (RMS), Rohde & Schwarz probe interface<br>Incl. carrying case; operating manual                                                                                       | R&S®RT-ZC10B | 1409.8210.02 |
| 50 MHz current probe, AC/DC, 0.1 V/A, 30 A (RMS), Rohde & Schwarz probe interface<br>Incl. carrying case; operating manual                                                                                         | R&S®RT-ZC15B | 1409.8227.02 |
| 100 MHz current probe, AC/DC, 0.1 V/A, 30 A (RMS), Rohde & Schwarz probe interface<br>Incl. carrying case; operating manual                                                                                        | R&S®RT-ZC20B | 1409.8233.02 |

| Designation                                                                                                                                                                                                                                                                               | Type           | Order No.    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|--------------|
| <b>Accessories and sets</b>                                                                                                                                                                                                                                                               |                |              |
| Mini clips, contains: mini clip (10)                                                                                                                                                                                                                                                      | R&S®RT-ZA4     | 1416.0428.02 |
| Micro clips, contains: micro clip (4)                                                                                                                                                                                                                                                     | R&S®RT-ZA5     | 1416.0434.02 |
| Lead set, contains: lead 6 cm (2.4 in) (5); lead 15 cm (5.9 in) (5)                                                                                                                                                                                                                       | R&S®RT-ZA6     | 1416.0440.02 |
| Probe box to N/USB adapter                                                                                                                                                                                                                                                                | R&S®RT-ZA9     | 1417.0909.02 |
| SMA(f) to BNC(m) adapter                                                                                                                                                                                                                                                                  | R&S®RT-ZA10    | 1416.0457.02 |
| Adapter BNC to 4 mm dual banana                                                                                                                                                                                                                                                           | R&S®RT-ZA11    | 1333.0796.02 |
| Probe power supply                                                                                                                                                                                                                                                                        | R&S®RT-ZA13    | 1409.7789.02 |
| Spare accessory set for R&S®RT-ZI10/11 isolated probes<br>Contains: insulating sleeve (2), reference contact (2), reference leads with crocodile clip, color clips, sprung hook                                                                                                           | R&S®RT-ZA20    | 1326.1978.02 |
| Extended accessory set for R&S®RT-ZI10/11 isolated probes<br>Contains: jaw clip, safety jaw clip, reference lead with 4 mm connector, reference lead with hook clip, 4 mm test probe, BNC connector, dual 4 mm to safety BNC adapter                                                      | R&S®RT-ZA21    | 1326.1984.02 |
| Multimeter test leads, two leads (red/black), 1000 V CAT III                                                                                                                                                                                                                              | R&S®RT-ZA22    | 1326.0988.02 |
| Accessory kit for R&S®RT-ZHD high-voltage differential probes<br>Contains: safety alligator clip (red/black); pincer clip (red/black); test clip (red/black); spade terminal (red/black); lead 17 cm (red/black); lead 100 cm (red/black)                                                 | R&S®RT-ZA24    | 1800.2707.02 |
| Probe positioner, 2 legged                                                                                                                                                                                                                                                                | R&S®RT-ZA29    | 1801.4803.02 |
| Probe tip accessory set for R&S®RT-ZP03, R&S®RT-ZP05S, R&S®RT-ZH03 passive voltage probes<br>Contains: ground lead; retractable hook; adjustment tool; protection cap; identification tags; IC insulating cap; solid probe tip (2); spring-loaded probe tip (2); ground clip; BNC adapter | R&S®RT-ZA40    | 1338.0742.02 |
| MMCX Y-lead adapter                                                                                                                                                                                                                                                                       | R&S®RT-ZAMXSQ  | 1803.1647.02 |
| MMCX solder-in to HT                                                                                                                                                                                                                                                                      | R&S®RT-ZAMXPAD | 1803.1653.02 |
| MMCX solder-in to HT open                                                                                                                                                                                                                                                                 | R&S®RT-ZAMXHTS | 1803.1660.02 |
| MMCX cable adapter UF.L                                                                                                                                                                                                                                                                   | R&S®RT-ZAMXUFL | 1803.1676.02 |
| 3D probe positioner                                                                                                                                                                                                                                                                       | R&S®RT-ZAP     | 1326.3641.02 |
| Power deskew fixture                                                                                                                                                                                                                                                                      | R&S®RT-ZF20    | 1800.0004.02 |

## Warranty and service

|                                                                |                               |                       |
|----------------------------------------------------------------|-------------------------------|-----------------------|
| <b>Warranty</b>                                                |                               |                       |
| Base unit                                                      |                               | 1 year                |
| All other items                                                |                               | 1 year                |
| <b>Service options</b>                                         |                               |                       |
|                                                                | <b>Service plans</b>          | <b>On demand</b>      |
| Calibration                                                    | up to five years <sup>6</sup> | pay per calibration   |
| Warranty and repair                                            | up to five years <sup>6</sup> | standard price repair |
| Contact your Rohde & Schwarz sales office for further details. |                               |                       |

---

<sup>6</sup> For extended periods, contact your Rohde & Schwarz sales office.







**Service at Rohde & Schwarz**  
**You're in great hands**

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

**dataTec**

Mess- und Prüftechnik. Die Experten.

**Ihr Ansprechpartner /  
Your Partner:**

**dataTec AG**

E-Mail: [info@datatec.eu](mailto:info@datatec.eu)

>>> [www.datatec.eu](http://www.datatec.eu)

**Rohde & Schwarz GmbH & Co. KG**

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

**Rohde & Schwarz customer support**

[www.rohde-schwarz.com/support](http://www.rohde-schwarz.com/support)



**Sustainable product design**

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management

**ISO 9001**

Certified Environmental Management

**ISO 14001**

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG  
Trade names are trademarks of the owners  
PD 5214.2362.22 | Version 30.00 | October 2025 (sk)  
R&S®RT-Zxx High Voltage and Current Probes  
Data without tolerance limits is not binding | Subject to change  
© 2009 - 2025 Rohde & Schwarz | 81671 Munich, Germany