

# R&S® FSVA3000 SIGNAL AND SPECTRUM ANALYZER

## Specifications

**dataTec**

Mess- und Prüftechnik. Die Experten.

Ihr Ansprechpartner /  
Your Partner:

**dataTec AG**

E-Mail: [info@datatec.eu](mailto:info@datatec.eu)

>>> [www.datatec.eu](http://www.datatec.eu)



Specifications  
Version 16.01

**ROHDE & SCHWARZ**

Make ideas real



# CONTENTS

|                                                                                                                       |           |
|-----------------------------------------------------------------------------------------------------------------------|-----------|
| <b>Definitions .....</b>                                                                                              | <b>3</b>  |
| <b>Specifications.....</b>                                                                                            | <b>4</b>  |
| Frequency .....                                                                                                       | 4         |
| Sweep time.....                                                                                                       | 6         |
| Resolution bandwidths.....                                                                                            | 6         |
| Signal analysis bandwidths.....                                                                                       | 7         |
| Level.....                                                                                                            | 7         |
| Sensitivity .....                                                                                                     | 9         |
| <i>Sensitivity without R&amp;S®FSV3-B710 option .....</i>                                                             | <i>9</i>  |
| <i>Sensitivity with R&amp;S®FSV3-B710 option .....</i>                                                                | <i>11</i> |
| Spurious responses .....                                                                                              | 13        |
| Level measurement uncertainty .....                                                                                   | 14        |
| Trigger functions.....                                                                                                | 15        |
| I/Q data .....                                                                                                        | 16        |
| Inputs and outputs .....                                                                                              | 19        |
| General data.....                                                                                                     | 21        |
| <b>Options .....</b>                                                                                                  | <b>22</b> |
| R&S®FSV3-B3 audio demodulator.....                                                                                    | 22        |
| R&S®FSV3-B5 and R&S®FSV3-B5E additional interfaces .....                                                              | 22        |
| R&S®FSV3-B10 external generator control.....                                                                          | 23        |
| R&S®FSV3-B21 LO/IF connections for external mixers (not available for R&S®FSVA3004, R&S®FSVA3007, R&S®FSVA3013) ..... | 23        |
| R&S®FSV3-B24 RF preamplifier .....                                                                                    | 23        |
| R&S®FSV3-B25 electronic attenuator .....                                                                              | 24        |
| R&S®FSV3-B271 analog baseband inputs.....                                                                             | 24        |
| R&S®FSV3-K980 health and utilization monitoring service (HUMS) .....                                                  | 25        |
| <b>Ordering information .....</b>                                                                                     | <b>26</b> |
| Options.....                                                                                                          | 26        |
| <i>Hardware .....</i>                                                                                                 | <i>26</i> |
| <i>Firmware .....</i>                                                                                                 | <i>28</i> |
| <i>PC software .....</i>                                                                                              | <i>30</i> |
| <i>Instrument security.....</i>                                                                                       | <i>30</i> |
| Upgrades.....                                                                                                         | 31        |
| Recommended extras.....                                                                                               | 32        |
| Power sensors supported by the R&S®FSV3-K9 option .....                                                               | 33        |
| Probes supported by R&S®FSV3-B271 option .....                                                                        | 34        |
| External frontends supported by R&S®FSV3-B553 option.....                                                             | 35        |
| <b>Warranty and service.....</b>                                                                                      | <b>35</b> |

# Definitions


## General

Product data applies under the following conditions:

- Three hours of storage at ambient temperature followed by 30 minutes of warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

## Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$  or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

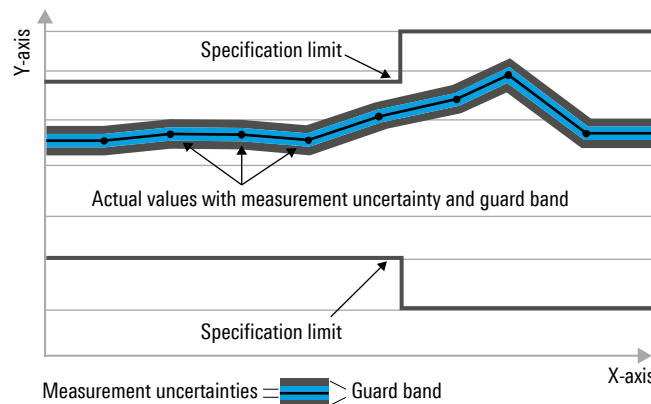

## Non-traceable specifications with limits (n. trc.)

Represent product performance that is specified and tested as described under “Specifications with limits” above. However, product performance in this case cannot be warranted due to the lack of measuring equipment traceable to national metrology standards. In this case, measurements are referenced to standards used in the Rohde & Schwarz laboratories.

## Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value, e.g. dimensions or resolution of a setting parameter. Compliance is ensured by design.

## Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

## Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter, e.g. nominal impedance. In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

## Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

## Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are designated with the format “parameter: value”.

Non-traceable specifications with limits, typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

In line with the 3GPP standard, chip rates are specified in million chips per second (Mcps), whereas bit rates and symbol rates are specified in billion bit per second (Gbps), million bit per second (Mbps), thousand bit per second (kbps), million symbols per second (Msps) or thousand symbols per second (ksps), and sample rates are specified in million samples per second (Msample/s). Gbps, Mcps, Mbps, Msps, kbps, ksps and Msample/s are not SI units.

# Specifications

## Frequency


| Frequency range              |              |                                      |
|------------------------------|--------------|--------------------------------------|
| Without R&S®FSV3-B710 option | R&S®FSVA3004 |                                      |
|                              | DC coupled   | 10 Hz to 4 GHz                       |
|                              | AC coupled   | 10 MHz to 4 GHz                      |
|                              | R&S®FSVA3007 |                                      |
|                              | DC coupled   | 10 Hz to 7.5 GHz                     |
|                              | AC coupled   | 10 MHz to 7.5 GHz                    |
|                              | R&S®FSVA3013 |                                      |
|                              | DC coupled   | 10 Hz to 13.6 GHz                    |
|                              | AC coupled   | 10 MHz to 13.6 GHz                   |
|                              | R&S®FSVA3030 |                                      |
|                              | DC coupled   | 10 Hz to 30 GHz                      |
|                              | AC coupled   | 10 MHz to 30 GHz                     |
|                              | R&S®FSVA3044 |                                      |
|                              | DC coupled   | 10 Hz to 44 GHz                      |
|                              | AC coupled   | 10 MHz to 44 GHz                     |
|                              | R&S®FSVA3050 |                                      |
|                              | DC coupled   | 10 Hz to 50 GHz/54 GHz <sup>1</sup>  |
|                              | AC coupled   | 10 MHz to 50 GHz/54 GHz <sup>1</sup> |
| With R&S®FSV3-B710 option    | R&S®FSVA3004 |                                      |
|                              | DC coupled   | 2 Hz to 4 GHz                        |
|                              | AC coupled   | 10 MHz to 4 GHz                      |
|                              | R&S®FSVA3007 |                                      |
|                              | DC coupled   | 2 Hz to 7.5 GHz                      |
|                              | AC coupled   | 10 MHz to 7.5 GHz                    |
|                              | R&S®FSVA3013 |                                      |
|                              | DC coupled   | 2 Hz to 13.6 GHz                     |
|                              | AC coupled   | 10 MHz to 13.6 GHz                   |
|                              | R&S®FSVA3030 |                                      |
|                              | DC coupled   | 2 Hz to 30 GHz                       |
|                              | AC coupled   | 10 MHz to 30 GHz                     |
|                              | R&S®FSVA3044 |                                      |
|                              | DC coupled   | 2 Hz to 44 GHz                       |
|                              | AC coupled   | 10 MHz to 44 GHz                     |
|                              | R&S®FSVA3050 |                                      |
|                              | DC coupled   | 2 Hz to 50 GHz/54 GHz <sup>1</sup>   |
|                              | AC coupled   | 10 MHz to 50 GHz/54 GHz <sup>1</sup> |
| Frequency resolution         |              | 0.01 Hz                              |

| Reference frequency, internal           |                                                  |                                                                                         |
|-----------------------------------------|--------------------------------------------------|-----------------------------------------------------------------------------------------|
| Accuracy                                |                                                  | (time since last adjustment × aging rate)<br>+ temperature drift + calibration accuracy |
| Aging per year                          | standard                                         | $1 \times 10^{-6}$                                                                      |
|                                         | with R&S®FSV3-B4 OCXO reference frequency option | $1 \times 10^{-7}$                                                                      |
| Temperature drift (0 °C to +50 °C)      | standard                                         | $1 \times 10^{-6}$                                                                      |
|                                         | with R&S®FSV3-B4 OCXO reference frequency option | $1 \times 10^{-8}$                                                                      |
| Achievable initial calibration accuracy | standard                                         | $5 \times 10^{-7}$                                                                      |
|                                         | with R&S®FSV3-B4 OCXO reference frequency option | $5 \times 10^{-8}$                                                                      |

<sup>1</sup> Up to 54 GHz with R&S®FSV3-B54G frequency extension option installed. RF preselection (YIG preselector) is active for  $f \leq 50$  GHz.

|                                   |                                                            |                                                                                                                                                                                   |
|-----------------------------------|------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Frequency readout</b>          |                                                            |                                                                                                                                                                                   |
| Marker resolution                 |                                                            | 1 Hz                                                                                                                                                                              |
| Uncertainty                       |                                                            | $\pm(\text{marker frequency} \times \text{reference accuracy} + 10 \% \times \text{resolution bandwidth} + \frac{1}{2} (\text{span} / (\text{sweep points} - 1)) + 1 \text{ Hz})$ |
| Number of sweep (trace) points    | default value                                              | 1001                                                                                                                                                                              |
|                                   | range                                                      | 101 to 100001                                                                                                                                                                     |
|                                   | range with active EMI measurements (R&S®FSV3-K54 required) | 101 to 200001                                                                                                                                                                     |
| Marker tuning frequency step size | marker step size = sweep points                            | $\text{span} / (\text{sweep points} - 1)$                                                                                                                                         |
|                                   | marker step size = standard                                | $\text{span} / (\text{default sweep points} - 1)$                                                                                                                                 |
| Frequency counter resolution      |                                                            | 0.001 Hz                                                                                                                                                                          |
| Count accuracy                    |                                                            | $\pm(\text{frequency} \times \text{reference accuracy} + \frac{1}{2} (\text{last digit}))$                                                                                        |
| Display range for frequency axis  |                                                            | 0 Hz to max. frequency                                                                                                                                                            |
| Resolution                        |                                                            | 0.1 Hz                                                                                                                                                                            |

|                                                         |                                                                                                                   |                       |
|---------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|-----------------------|
| <b>Spectral purity</b>                                  |                                                                                                                   |                       |
| SSB phase noise (1 Hz),<br>without R&S®FSV3-B710 option | frequency = 1 GHz, carrier offset                                                                                 |                       |
|                                                         | 100 Hz                                                                                                            | < -95 dBc             |
|                                                         | 1 kHz                                                                                                             | < -115 dBc            |
|                                                         | 10 kHz                                                                                                            | < -120 dBc            |
|                                                         | 100 kHz                                                                                                           | < -125 dBc            |
|                                                         | 1 MHz                                                                                                             | < -137 dBc            |
|                                                         | 10 MHz                                                                                                            | -152 dBc (nom.)       |
| SSB phase noise (1 Hz),<br>with R&S®FSV3-B710 option    | frequency = 1 GHz, carrier offset                                                                                 |                       |
|                                                         | 100 Hz                                                                                                            | < -100 dBc            |
|                                                         | 1 kHz                                                                                                             | < -122 dBc            |
|                                                         | 10 kHz                                                                                                            | < -127 dBc            |
|                                                         | 100 kHz                                                                                                           | < -127 dBc            |
|                                                         | 1 MHz                                                                                                             | -140 dBc (nom.)       |
|                                                         | 10 MHz                                                                                                            | -152 dBc (nom.)       |
|                                                         | frequency = 10.5 GHz, carrier offset                                                                              |                       |
|                                                         | 100 Hz                                                                                                            | -85 dBc (nom.)        |
|                                                         | 1 kHz                                                                                                             | -110 dBc (nom.)       |
|                                                         | 10 kHz                                                                                                            | -124 dBc (nom.)       |
|                                                         | 100 kHz                                                                                                           | -126 dBc (nom.)       |
|                                                         | 1 MHz                                                                                                             | -140 dBc (nom.)       |
|                                                         | 10 MHz                                                                                                            | -152 dBc (nom.)       |
| Residual FM                                             | frequency = 1000 MHz,<br>demodulation bandwidth = 25 kHz,<br>AF highpass filter 50 Hz,<br>AF lowpass filter 3 kHz | < 0.1 Hz (RMS) (nom.) |

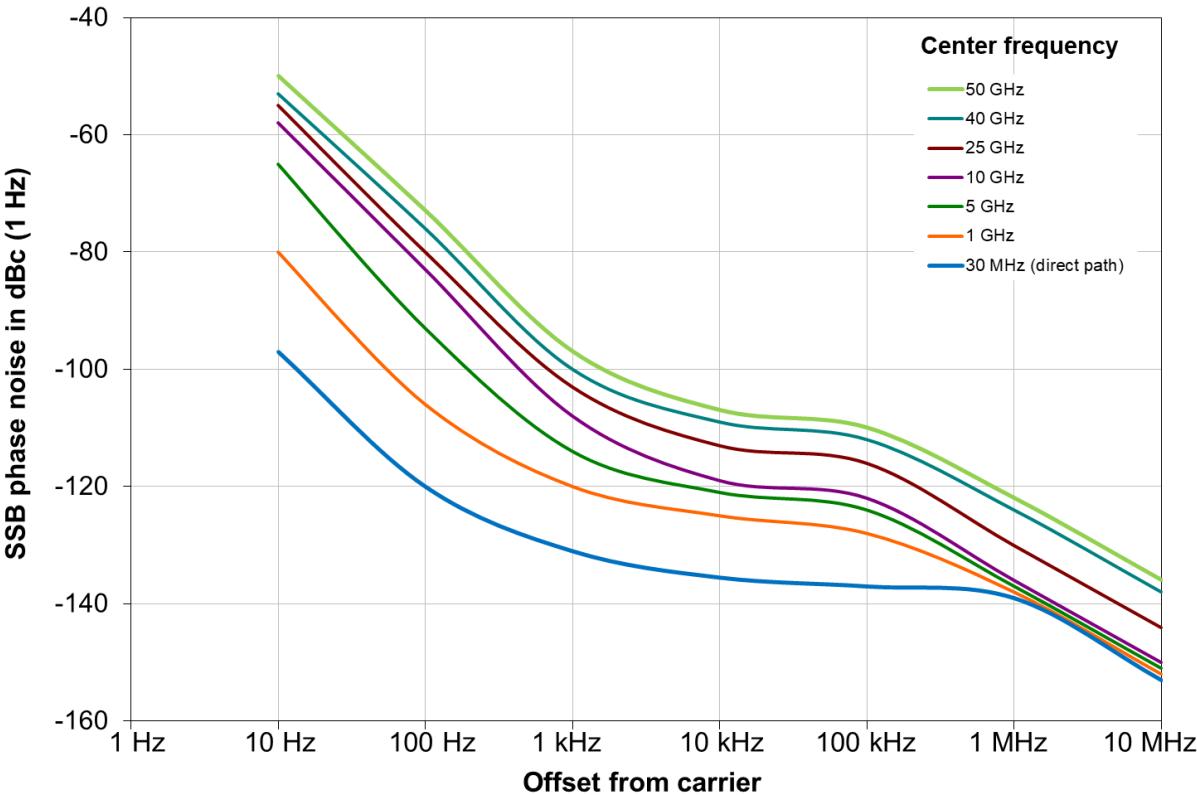

Typical phase noise at different center frequencies (without R&S®FSV3-B710 option)

Sweep time

|                     |                     |                                 |
|---------------------|---------------------|---------------------------------|
| Sweep time range    | span = 0 Hz         | 1 μs to 16000 s                 |
|                     | span ≥ 10 Hz, swept | 1.01 ms to 16000 s <sup>2</sup> |
|                     | span ≥ 10 Hz, FFT   | 0.7 μs to 16000 s <sup>3</sup>  |
| Sweep time accuracy | span = 0 Hz         | ±0.1 % (nom.)                   |
|                     | span ≥ 10 Hz, swept | ±3 % (nom.)                     |

Resolution bandwidths

| Sweep filters and FFT filters <sup>4</sup> |                                       |                                                                                                            |
|--------------------------------------------|---------------------------------------|------------------------------------------------------------------------------------------------------------|
| Resolution bandwidths (–3 dB)              | standard                              | 1 Hz to 10 MHz in 1/2/3/5 sequence, additionally: 51 kHz, 150 kHz, 250 kHz, 400 kHz, 450 kHz, 6 MHz, 8 MHz |
|                                            | with R&S®FSV3-B8E option <sup>5</sup> | 20 MHz, 28 MHz, 30 MHz, 40 MHz additionally                                                                |
| Bandwidth uncertainty                      |                                       | < 3 % (nom.)                                                                                               |
| Shape factor 60 dB:3 dB                    |                                       | < 5 (nom.)                                                                                                 |

<sup>2</sup> The selected sweep time is the net data acquisition time (without the extra time needed for hardware settling or FFT processing).

<sup>3</sup> Time for data acquisition for FFT calculation.

<sup>4</sup> Resolution bandwidths > 3 MHz are available in sweep mode only.

<sup>5</sup> Gaussian shape for RBW ≤ 28 MHz.

| <b>Channel filters</b>  |                                     |                                                                                                                                                     |
|-------------------------|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Bandwidths (–3 dB)      | standard (RRC = root raised cosine) | 100 Hz, 200 Hz, 300 Hz, 500 Hz                                                                                                                      |
|                         |                                     | 1, 1.5, 2, 2.4, 2.7, 3, 3.4, 4, 4.5, 5, 6, 8.5, 9, 10, 12.5, 14, 15, 16, 18 (RRC), 20, 21, 24.3 (RRC), 25, 30, 50, 100, 150, 192, 200, 300, 500 kHz |
|                         | with R&S®FSV3-B8E option            | 1, 1.228, 1.28 (RRC), 1.5, 2, 3, 3.84 (RRC), 4.096 (RRC), 5, 10 MHz                                                                                 |
| Bandwidth uncertainty   |                                     | < 2 % (nom.)                                                                                                                                        |
| Shape factor 60 dB:3 dB |                                     | < 2 (nom.)                                                                                                                                          |

| <b>EMI filters (with R&amp;S®FSV3-K54 only)</b> |  |                                                                      |
|-------------------------------------------------|--|----------------------------------------------------------------------|
| Bandwidths (–6 dB)                              |  | 10 Hz, 100 Hz, 200 Hz, 1 kHz, 9 kHz, 10 kHz, 100 kHz, 120 kHz, 1 MHz |
| Bandwidth uncertainty                           |  | < 3 % (nom.)                                                         |
| Shape factor 60 dB:6 dB                         |  | < 4 (nom.)                                                           |

|                         |  |                                    |
|-------------------------|--|------------------------------------|
| <b>Video bandwidths</b> |  | 1 Hz to 10 MHz in 1/2/3/5 sequence |
|-------------------------|--|------------------------------------|

## Signal analysis bandwidths

|                                          |                                                                                          |                 |
|------------------------------------------|------------------------------------------------------------------------------------------|-----------------|
| <b>Maximum signal analysis bandwidth</b> | <b><math>f \leq 7.5</math> GHz</b>                                                       |                 |
|                                          | standard                                                                                 | 28 MHz (nom.)   |
|                                          | with R&S®FSV3-B40 option                                                                 | 40 MHz (nom.)   |
|                                          | with R&S®FSV3-B200 option                                                                | 200 MHz (nom.)  |
|                                          | with R&S®FSV3-B400 option                                                                | 400 MHz (nom.)  |
|                                          | with R&S®FSV3-B601 option                                                                | 600 MHz (nom.)  |
|                                          | with R&S®FSV3-B1001 option                                                               | 1000 MHz (nom.) |
|                                          | <b><math>f &gt; 7.5</math> GHz, with R&amp;S®FSV3-B11 option and YIG preselector off</b> |                 |
|                                          | standard                                                                                 | 28 MHz (nom.)   |
|                                          | with R&S®FSV3-B40 option                                                                 | 40 MHz (nom.)   |
|                                          | with R&S®FSV3-B200 option                                                                | 200 MHz (nom.)  |
|                                          | with R&S®FSV3-B400 option                                                                | 400 MHz (nom.)  |
|                                          | with R&S®FSV3-B601 option                                                                | 600 MHz (nom.)  |
|                                          | with R&S®FSV3-B1001 option                                                               | 1000 MHz (nom.) |

## Level

| <b>Level display</b>             |                           |                                                                                   |
|----------------------------------|---------------------------|-----------------------------------------------------------------------------------|
| Display range                    |                           | displayed noise floor up to +30 dBm                                               |
| Logarithmic level axis           |                           | 1 dB to 200 dB                                                                    |
| Linear level axis                |                           | 10 % of reference level per level division, 10 divisions or logarithmic scaling   |
| Number of traces                 |                           | 6                                                                                 |
| Trace detector                   |                           | max. peak, min. peak, auto peak (normal), sample, RMS, average                    |
| Trace functions                  |                           | clear/write, max. hold, min. hold, average, view, spectrogram                     |
| Setting range of reference level |                           | –130 dBm to (10 dBm + RF attenuation – RF preamplifier gain), in steps of 0.01 dB |
| Units of level axis              | logarithmic level display | dBm, dBμV, dBmV, dBμA, dBpW                                                       |
|                                  | linear level display      | μV, mV, μA, mA, pW, nW                                                            |

|                                                               |                                                   |                   |
|---------------------------------------------------------------|---------------------------------------------------|-------------------|
| <b>Maximum input level</b> <sup>6</sup>                       |                                                   |                   |
| DC voltage                                                    | AC coupled                                        | 50 V              |
|                                                               | DC coupled                                        | 0 V               |
| CW RF power                                                   | RF attenuation = 0 dB                             |                   |
|                                                               | RF preamplifier = off                             | 20 dBm (= 0.1 W)  |
|                                                               | with R&S®FSV3-B24 option,<br>RF preamplifier = on | 13 dBm (= 0.02 W) |
|                                                               | RF attenuation ≥ 10 dB                            |                   |
|                                                               | RF preamplifier = off                             | 30 dBm (= 1 W)    |
|                                                               | with R&S®FSV3-B24 option,<br>RF preamplifier = on | 23 dBm (= 0.2 W)  |
| Maximum pulse power,<br>pulse duration $\tau = 3 \mu\text{s}$ | RF attenuation ≥ 10 dB                            | 100 W             |
| Maximum pulse voltage                                         | RF attenuation ≥ 10 dB                            | 50 V              |

|                                   |                                                                                                                                                                                                                  |                       |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| <b>Intermodulation</b>            |                                                                                                                                                                                                                  |                       |
| 1 dB compression of input mixer   | RF attenuation = 0 dB, RF preamplifier = off                                                                                                                                                                     |                       |
|                                   | $f \leq 7.5 \text{ GHz}$                                                                                                                                                                                         | +10 dBm (nom.)        |
|                                   | $f > 7.5 \text{ GHz}$                                                                                                                                                                                            | +5 dBm (nom.)         |
|                                   | with R&S®FSV3-B24 option, RF preamplifier = 30 dB, RF attenuation = 0 dB                                                                                                                                         |                       |
|                                   | $f \leq 7.5 \text{ GHz}$                                                                                                                                                                                         | -20 dBm (nom.)        |
|                                   | $f > 7.5 \text{ GHz}$                                                                                                                                                                                            | -23 dBm (nom.)        |
| Third order intercept point (TOI) | RF attenuation = 0 dB, RF preamplifier = off, YIG preselector on for $f > 7.5 \text{ GHz}$ , level = -15 dBm (both), $\Delta f > 5 \times \text{RBW}$ or 10 kHz, whichever is larger                             |                       |
|                                   | R&S®FSVA3004, R&S®FSVA3007                                                                                                                                                                                       |                       |
|                                   | $10 \text{ MHz} \leq f_{\text{in}} < 3.6 \text{ GHz}$                                                                                                                                                            | > 17 dBm, typ. 20 dBm |
|                                   | $3.6 \text{ GHz} \leq f_{\text{in}} \leq 7.5 \text{ GHz}$                                                                                                                                                        | > 16 dBm, typ. 19 dBm |
|                                   | R&S®FSVA3013, R&S®FSVA3030, YIG preselector on for $f > 7.5 \text{ GHz}$                                                                                                                                         |                       |
|                                   | $10 \text{ MHz} \leq f_{\text{in}} \leq 16 \text{ GHz}$                                                                                                                                                          | > 17 dBm, typ. 20 dBm |
|                                   | $16 \text{ GHz} < f_{\text{in}} < 20 \text{ GHz}$                                                                                                                                                                | > 14 dBm, typ. 18 dBm |
|                                   | $20 \text{ GHz} \leq f_{\text{in}} \leq 26.5 \text{ GHz}$                                                                                                                                                        | > 17 dBm, typ. 20 dBm |
|                                   | $26.5 \text{ GHz} < f_{\text{in}} \leq 30 \text{ GHz}$                                                                                                                                                           | > 15 dBm, typ. 21 dBm |
|                                   | R&S®FSVA3044, R&S®FSVA3050, YIG preselector on for $f > 7.5 \text{ GHz}$                                                                                                                                         |                       |
|                                   | $10 \text{ MHz} \leq f_{\text{in}} < 3.6 \text{ GHz}$                                                                                                                                                            | > 17 dBm, typ. 20 dBm |
|                                   | $3.6 \text{ GHz} \leq f_{\text{in}} \leq 7.5 \text{ GHz}$                                                                                                                                                        | > 16 dBm, typ. 19 dBm |
|                                   | $7.5 \text{ GHz} < f_{\text{in}} \leq 20 \text{ GHz}$                                                                                                                                                            | > 15 dBm, typ. 21 dBm |
|                                   | $20 \text{ GHz} < f_{\text{in}} \leq 24 \text{ GHz}$                                                                                                                                                             | > 12 dBm, typ. 15 dBm |
|                                   | $24 \text{ GHz} < f_{\text{in}} \leq 40 \text{ GHz}$                                                                                                                                                             | > 15 dBm, typ. 21 dBm |
|                                   | $40 \text{ GHz} < f_{\text{in}} \leq 44 \text{ GHz}$                                                                                                                                                             | > 12 dBm, typ. 21 dBm |
|                                   | $44 \text{ GHz} < f_{\text{in}} \leq 50 \text{ GHz}$                                                                                                                                                             | > 10 dBm, typ. 16 dBm |
|                                   | with R&S®FSV3-B24 option, RF attenuation = 0 dB, RF preamplifier = 30 dB, YIG preselector on for $f > 7.5 \text{ GHz}$ , level = -45 dBm (both), $\Delta f > 5 \times \text{RBW}$ or 10 kHz, whichever is larger |                       |
|                                   | $10 \text{ MHz} \leq f_{\text{in}} \leq 43.5 \text{ GHz}$                                                                                                                                                        | -20 dBm (nom.)        |
|                                   | R&S®FSVA3050 with R&S®FSV3-B24 option model .49                                                                                                                                                                  |                       |
|                                   | $43.5 \text{ GHz} < f_{\text{in}} \leq 50 \text{ GHz}$                                                                                                                                                           | -20 dBm (nom.)        |
|                                   | R&S®FSVA3050 with R&S®FSV3-B24 option model .50                                                                                                                                                                  |                       |
|                                   | $43.5 \text{ GHz} < f_{\text{in}} \leq 50 \text{ GHz}$                                                                                                                                                           | -20 dBm (nom.)        |
| Second harmonic intercept (SHI)   | RF attenuation = 0 dB, RF preamplifier = off, YIG preselector on for $f_{\text{in}} > 3.75 \text{ GHz}$ , level = -10 dBm                                                                                        |                       |
|                                   | $100 \text{ MHz} < f_{\text{in}} \leq 1.75 \text{ GHz}$                                                                                                                                                          | 45 dBm (nom.)         |
|                                   | $1.75 \text{ GHz} < f_{\text{in}} \leq 22 \text{ GHz}$                                                                                                                                                           | 80 dBm (nom.)         |
|                                   | R&S®FSVA3050                                                                                                                                                                                                     |                       |
|                                   | $22 \text{ GHz} < f_{\text{in}} \leq 25 \text{ GHz}$                                                                                                                                                             | 80 dBm (nom.)         |
|                                   | with R&S®FSV3-B24 option, RF preamplifier = 30 dB, RF attenuation = 0 dB, YIG preselector on for $f_{\text{in}} > 3.75 \text{ GHz}$ , level = -40 dBm                                                            |                       |
|                                   | $100 \text{ MHz} < f_{\text{in}} \leq 21.75 \text{ GHz}$                                                                                                                                                         | 10 dBm (nom.)         |
|                                   | R&S®FSVA3050 with R&S®FSV3-B24 option model .49                                                                                                                                                                  |                       |
|                                   | $21.75 \text{ GHz} < f_{\text{in}} \leq 25 \text{ GHz}$                                                                                                                                                          | 5 dBm (nom.)          |
|                                   | R&S®FSVA3050 with R&S®FSV3-B24 option model .50                                                                                                                                                                  |                       |
|                                   | $21.75 \text{ GHz} < f_{\text{in}} \leq 25 \text{ GHz}$                                                                                                                                                          | 10 dBm (nom.)         |

<sup>6</sup> Maximum input level while instrument is in operation.



## Sensitivity

All noise level data in this section not marked as typical (typ.) or nominal (nom.) are specified values whose compliance is ensured by testing.

For instruments with R&S®FSV3-B601 or R&S®FSV3-B1001 option applies:

- With preamplifier switched off or not installed, add 2 dB to the specified values for  $f \leq 7.5$  GHz
- With preamplifier switched on, add 1 dB to the specified values for  $f \leq 7.5$  GHz

### Sensitivity without R&S®FSV3-B710 option

| Displayed average noise level without R&S®FSV3-B24 preamplifier option |                                                                                                                                                 |                         |
|------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
|                                                                        | RF attenuation = 0 dB, termination = 50 $\Omega$ , normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +20 °C to +30 °C |                         |
|                                                                        | 10 Hz                                                                                                                                           | –90 dBm (nom.)          |
|                                                                        | 20 Hz                                                                                                                                           | –100 dBm, typ. –110 dBm |
|                                                                        | 100 Hz                                                                                                                                          | –110 dBm, typ. –120 dBm |
|                                                                        | 1 kHz                                                                                                                                           | –120 dBm, typ. –130 dBm |
|                                                                        | RF attenuation = 0 dB, termination = 50 $\Omega$ , logarithmic scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +20 °C to +30 °C       |                         |
|                                                                        | R&S®FSVA3004, R&S®FSVA3007                                                                                                                      |                         |
|                                                                        | 9 kHz $\leq f < 100$ kHz                                                                                                                        | –140 dBm, typ. –146 dBm |
|                                                                        | 100 kHz $\leq f < 1$ MHz                                                                                                                        | –145 dBm, typ. –150 dBm |
|                                                                        | 1 MHz $\leq f < 1$ GHz                                                                                                                          | –152 dBm, typ. –155 dBm |
|                                                                        | 1 GHz $\leq f < 3$ GHz                                                                                                                          | –151 dBm, typ. –153 dBm |
|                                                                        | 3 GHz $\leq f < 6$ GHz                                                                                                                          | –150 dBm, typ. –152 dBm |
|                                                                        | 6 GHz $\leq f \leq 7.5$ GHz                                                                                                                     | –149 dBm, typ. –151 dBm |
|                                                                        | R&S®FSVA3013, R&S®FSVA3030                                                                                                                      |                         |
|                                                                        | 9 kHz $\leq f < 100$ kHz                                                                                                                        | –140 dBm, typ. –146 dBm |
|                                                                        | 100 kHz $\leq f < 1$ MHz                                                                                                                        | –145 dBm, typ. –150 dBm |
|                                                                        | 1 MHz $\leq f < 1$ GHz                                                                                                                          | –151 dBm, typ. –154 dBm |
|                                                                        | 1 GHz $\leq f < 3$ GHz                                                                                                                          | –149 dBm, typ. –152 dBm |
|                                                                        | 3 GHz $\leq f < 6$ GHz                                                                                                                          | –147 dBm, typ. –150 dBm |
|                                                                        | 6 GHz $\leq f \leq 7.5$ GHz                                                                                                                     | –145 dBm, typ. –147 dBm |
|                                                                        | 7.5 GHz $< f \leq 15$ GHz                                                                                                                       | –148 dBm, typ. –151 dBm |
|                                                                        | 15 GHz $< f \leq 26.5$ GHz                                                                                                                      | –145 dBm, typ. –148 dBm |
|                                                                        | 26.5 GHz $< f \leq 30$ GHz                                                                                                                      | –144 dBm, typ. –147 dBm |
|                                                                        | R&S®FSVA3044, R&S®FSVA3050                                                                                                                      |                         |
|                                                                        | 9 kHz $\leq f < 100$ kHz                                                                                                                        | –140 dBm, typ. –146 dBm |
|                                                                        | 100 kHz $\leq f < 1$ MHz                                                                                                                        | –145 dBm, typ. –150 dBm |
|                                                                        | 1 MHz $\leq f < 1$ GHz                                                                                                                          | –151 dBm, typ. –154 dBm |
|                                                                        | 1 GHz $\leq f < 3$ GHz                                                                                                                          | –149 dBm, typ. –152 dBm |
|                                                                        | 3 GHz $\leq f < 6$ GHz                                                                                                                          | –147 dBm, typ. –150 dBm |
|                                                                        | 6 GHz $\leq f \leq 7.5$ GHz                                                                                                                     | –145 dBm, typ. –147 dBm |
|                                                                        | 7.5 GHz $< f \leq 15$ GHz                                                                                                                       | –148 dBm, typ. –151 dBm |
|                                                                        | 15 GHz $< f \leq 34$ GHz                                                                                                                        | –145 dBm, typ. –148 dBm |
|                                                                        | 34 GHz $< f \leq 40$ GHz                                                                                                                        | –139 dBm, typ. –142 dBm |
|                                                                        | 40 GHz $< f \leq 44$ GHz                                                                                                                        | –136 dBm, typ. –139 dBm |
|                                                                        | 44 GHz $< f \leq 50$ GHz                                                                                                                        | –133 dBm, typ. –137 dBm |
|                                                                        | 50 GHz $< f \leq 54$ GHz <sup>1</sup>                                                                                                           | –131 dBm, typ. –134 dBm |
| Improvement with noise cancellation                                    | for noise-like signals                                                                                                                          |                         |
|                                                                        | 10 MHz $< f \leq 43.5$ GHz                                                                                                                      | 13 dB (nom.)            |
|                                                                        | $f > 43.5$ GHz                                                                                                                                  | 0 dB (nom.)             |

| Displayed average noise level with R&S®FSV3-B24 preamplifier option |                                                                                                                                                               |                         |
|---------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| RF preamplifier = off                                               | RF attenuation = 0 dB, termination = 50 $\Omega$ , normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +20 °C to +30 °C               |                         |
|                                                                     | 10 Hz                                                                                                                                                         | –90 dBm (nom.)          |
|                                                                     | 20 Hz                                                                                                                                                         | –100 dBm, typ. –110 dBm |
|                                                                     | 100 Hz                                                                                                                                                        | –110 dBm, typ. –120 dBm |
|                                                                     | 1 kHz                                                                                                                                                         | –120 dBm, typ. –130 dBm |
|                                                                     | RF attenuation = 0 dB, termination = 50 $\Omega$ , logarithmic scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +20 °C to +30 °C                     |                         |
|                                                                     | R&S®FSVA3004, R&S®FSVA3007                                                                                                                                    |                         |
|                                                                     | 9 kHz $\leq f < 100$ kHz                                                                                                                                      | –140 dBm, typ. –146 dBm |
|                                                                     | 100 kHz $\leq f < 1$ MHz                                                                                                                                      | –145 dBm, typ. –150 dBm |
|                                                                     | 1 MHz $\leq f < 1$ GHz                                                                                                                                        | –151 dBm, typ. –154 dBm |
|                                                                     | 1 GHz $\leq f < 3$ GHz                                                                                                                                        | –150 dBm, typ. –154 dBm |
|                                                                     | 3 GHz $\leq f < 6$ GHz                                                                                                                                        | –147 dBm, typ. –150 dBm |
|                                                                     | 6 GHz $\leq f \leq 7.5$ GHz                                                                                                                                   | –146 dBm, typ. –148 dBm |
|                                                                     | R&S®FSVA3013, R&S®FSVA3030                                                                                                                                    |                         |
|                                                                     | 9 kHz $\leq f < 100$ kHz                                                                                                                                      | –140 dBm, typ. –146 dBm |
|                                                                     | 100 kHz $\leq f < 1$ MHz                                                                                                                                      | –145 dBm, typ. –150 dBm |
|                                                                     | 1 MHz $\leq f < 1$ GHz                                                                                                                                        | –150 dBm, typ. –153 dBm |
|                                                                     | 1 GHz $\leq f < 3$ GHz                                                                                                                                        | –148 dBm, typ. –151 dBm |
|                                                                     | 3 GHz $\leq f < 6$ GHz                                                                                                                                        | –145 dBm, typ. –148 dBm |
|                                                                     | 6 GHz $\leq f \leq 7.5$ GHz                                                                                                                                   | –142 dBm, typ. –144 dBm |
|                                                                     | 7.5 GHz $< f \leq 15$ GHz                                                                                                                                     | –145 dBm, typ. –148 dBm |
|                                                                     | 15 GHz $< f \leq 30$ GHz                                                                                                                                      | –141 dBm, typ. –144 dBm |
|                                                                     | R&S®FSVA3044, R&S®FSVA3050                                                                                                                                    |                         |
|                                                                     | 9 kHz $\leq f < 100$ kHz                                                                                                                                      | –140 dBm, typ. –146 dBm |
|                                                                     | 100 kHz $\leq f < 1$ MHz                                                                                                                                      | –145 dBm, typ. –150 dBm |
|                                                                     | 1 MHz $\leq f < 1$ GHz                                                                                                                                        | –150 dBm, typ. –153 dBm |
|                                                                     | 1 GHz $\leq f < 3$ GHz                                                                                                                                        | –148 dBm, typ. –151 dBm |
|                                                                     | 3 GHz $\leq f < 6$ GHz                                                                                                                                        | –145 dBm, typ. –148 dBm |
|                                                                     | 6 GHz $\leq f \leq 7.5$ GHz                                                                                                                                   | –142 dBm, typ. –144 dBm |
|                                                                     | 7.5 GHz $< f \leq 15$ GHz                                                                                                                                     | –146 dBm, typ. –149 dBm |
|                                                                     | 15 GHz $< f \leq 34$ GHz                                                                                                                                      | –143 dBm, typ. –146 dBm |
|                                                                     | 34 GHz $< f \leq 40$ GHz                                                                                                                                      | –137 dBm, typ. –140 dBm |
|                                                                     | 40 GHz $< f \leq 44$ GHz                                                                                                                                      | –133 dBm, typ. –136 dBm |
|                                                                     | 44 GHz $< f \leq 50$ GHz                                                                                                                                      | –130 dBm, typ. –133 dBm |
|                                                                     | 50 GHz $< f \leq 54$ GHz <sup>1</sup>                                                                                                                         | –128 dBm, typ. –131 dBm |
| RF preamplifier = 30 dB                                             | RF attenuation = 0 dB, termination = 50 $\Omega$ , logarithmic scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +20 °C to +30 °C, YIG preselector on |                         |
|                                                                     | R&S®FSVA3004, R&S®FSVA3007, R&S®FSVA3013, R&S®FSVA3030                                                                                                        |                         |
|                                                                     | 10 MHz $\leq f < 50$ MHz                                                                                                                                      | –158 dBm, typ. –162 dBm |
|                                                                     | 50 MHz $\leq f \leq 7.5$ GHz                                                                                                                                  | –164 dBm, typ. –167 dBm |
|                                                                     | 7.5 GHz $< f \leq 13.6$ GHz                                                                                                                                   | –162 dBm, typ. –165 dBm |
|                                                                     | 13.6 GHz $< f \leq 22$ GHz                                                                                                                                    | –160 dBm, typ. –163 dBm |
|                                                                     | 22 GHz $< f \leq 26.5$ GHz                                                                                                                                    | –157 dBm, typ. –160 dBm |
|                                                                     | 26.5 GHz $< f \leq 30$ GHz                                                                                                                                    | –155 dBm, typ. –158 dBm |
|                                                                     | R&S®FSVA3044 <sup>7</sup>                                                                                                                                     |                         |
|                                                                     | 10 MHz $\leq f < 3$ GHz                                                                                                                                       | –164 dBm                |
|                                                                     | 3 GHz $\leq f \leq 7.5$ GHz                                                                                                                                   | –161 dBm                |
|                                                                     | 7.5 GHz $< f \leq 26.5$ GHz                                                                                                                                   | –160 dBm                |
|                                                                     | 26.5 GHz $< f \leq 40$ GHz                                                                                                                                    | –158 dBm                |
|                                                                     | 40 GHz $< f \leq 43.5$ GHz                                                                                                                                    | –149 dBm                |
|                                                                     | R&S®FSVA3050 with R&S®FSV3-B24 option model .49                                                                                                               |                         |
|                                                                     | 10 MHz $\leq f < 2.5$ GHz                                                                                                                                     | –164 dBm                |
|                                                                     | 2.5 GHz $\leq f \leq 7.5$ GHz                                                                                                                                 | –161 dBm                |
|                                                                     | 7.5 GHz $< f \leq 26.5$ GHz                                                                                                                                   | –160 dBm                |
|                                                                     | 26.5 GHz $< f \leq 40$ GHz                                                                                                                                    | –158 dBm                |
|                                                                     | 40 GHz $< f \leq 43.5$ GHz                                                                                                                                    | –149 dBm                |
|                                                                     | 43.5 GHz $< f \leq 50$ GHz                                                                                                                                    | –139 dBm                |
|                                                                     | 50 GHz $< f \leq 54$ GHz <sup>1</sup>                                                                                                                         | –133 dBm                |

<sup>7</sup> The frequency range of the RF preamplifier for the R&S®FSVA3044 is limited to 43.5 GHz.

|                                        |                                                     |              |
|----------------------------------------|-----------------------------------------------------|--------------|
| RF preamplifier = 30 dB<br>(continued) | R&S®FSVA3050 with R&S®FSV3-B24 option model .50     |              |
|                                        | 10 MHz $\leq f < 2.5$ GHz                           | –164 dBm     |
|                                        | 2.5 GHz $\leq f \leq 7.5$ GHz                       | –161 dBm     |
|                                        | 7.5 GHz $< f \leq 26.5$ GHz                         | –160 dBm     |
|                                        | 26.5 GHz $< f \leq 40$ GHz                          | –158 dBm     |
|                                        | 40 GHz $< f \leq 44$ GHz                            | –161 dBm     |
|                                        | 44 GHz $< f \leq 50$ GHz                            | –152 dBm     |
| Improvement with noise cancellation    | 50 GHz $< f \leq 54$ GHz <sup>1</sup>               | –146 dBm     |
|                                        | for noise-like signals                              |              |
|                                        | with R&S®FSV3-B24 option models .07/.13/.30/.44/.49 |              |
|                                        | 10 MHz $< f \leq 43.5$ GHz                          | 13 dB (nom.) |
|                                        | $f > 43.5$ GHz                                      | 0 dB (nom.)  |
|                                        | with R&S®FSV3-B24 option model .50                  |              |
|                                        | 10 MHz $< f \leq 50$ GHz/54 GHz <sup>1</sup>        | 13 dB (nom.) |

### Sensitivity with R&S®FSV3-B710 option

| Displayed average noise level without R&S®FSV3-B24 preamplifier option |                                                                                                                                                 |                         |
|------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
|                                                                        | RF attenuation = 0 dB, termination = 50 $\Omega$ , normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +20 °C to +30 °C |                         |
|                                                                        | 3 Hz                                                                                                                                            | –90 dBm (nom.)          |
|                                                                        | 10 Hz                                                                                                                                           | –90 dBm (nom.)          |
|                                                                        | 20 Hz                                                                                                                                           | –100 dBm, typ. –110 dBm |
|                                                                        | 100 Hz                                                                                                                                          | –110 dBm, typ. –120 dBm |
|                                                                        | 1 kHz                                                                                                                                           | –120 dBm, typ. –130 dBm |
|                                                                        | RF attenuation = 0 dB, termination = 50 $\Omega$ , logarithmic scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +20 °C to +30 °C       |                         |
|                                                                        | R&S®FSVA3004, R&S®FSVA3007                                                                                                                      |                         |
|                                                                        | 9 kHz $\leq f < 100$ kHz                                                                                                                        | –140 dBm                |
|                                                                        | 100 kHz $\leq f < 1$ MHz                                                                                                                        | –145 dBm                |
|                                                                        | 1 MHz $\leq f < 1$ GHz                                                                                                                          | –152 dBm                |
|                                                                        | 1 GHz $\leq f < 3$ GHz                                                                                                                          | –153 dBm                |
|                                                                        | 3 GHz $\leq f < 6$ GHz                                                                                                                          | –152 dBm                |
|                                                                        | 6 GHz $\leq f \leq 7.5$ GHz                                                                                                                     | –151 dBm                |
|                                                                        | R&S®FSVA3013, R&S®FSVA3030                                                                                                                      |                         |
|                                                                        | 9 kHz $\leq f < 100$ kHz                                                                                                                        | –140 dBm                |
|                                                                        | 100 kHz $\leq f < 1$ MHz                                                                                                                        | –145 dBm                |
|                                                                        | 1 MHz $\leq f < 1$ GHz                                                                                                                          | –151 dBm                |
|                                                                        | 1 GHz $\leq f < 3$ GHz                                                                                                                          | –151 dBm                |
|                                                                        | 3 GHz $\leq f < 6$ GHz                                                                                                                          | –149 dBm                |
|                                                                        | 6 GHz $\leq f \leq 7.5$ GHz                                                                                                                     | –147 dBm                |
|                                                                        | 7.5 GHz $< f \leq 15$ GHz                                                                                                                       | –151 dBm                |
|                                                                        | 15 GHz $< f \leq 30$ GHz                                                                                                                        | –145 dBm                |
|                                                                        | R&S®FSVA3044, R&S®FSVA3050                                                                                                                      |                         |
|                                                                        | 9 kHz $\leq f < 100$ kHz                                                                                                                        | –140 dBm                |
|                                                                        | 100 kHz $\leq f < 1$ MHz                                                                                                                        | –145 dBm                |
|                                                                        | 1 MHz $\leq f < 1$ GHz                                                                                                                          | –151 dBm                |
|                                                                        | 1 GHz $\leq f < 3$ GHz                                                                                                                          | –151 dBm                |
|                                                                        | 3 GHz $\leq f < 6$ GHz                                                                                                                          | –149 dBm                |
|                                                                        | 6 GHz $\leq f \leq 7.5$ GHz                                                                                                                     | –147 dBm                |
|                                                                        | 7.5 GHz $< f \leq 15$ GHz                                                                                                                       | –149 dBm                |
|                                                                        | 15 GHz $< f \leq 34$ GHz                                                                                                                        | –145 dBm                |
|                                                                        | 34 GHz $< f \leq 40$ GHz                                                                                                                        | –142 dBm                |
|                                                                        | 40 GHz $< f \leq 44$ GHz                                                                                                                        | –139 dBm                |
|                                                                        | 44 GHz $< f \leq 50$ GHz                                                                                                                        | –134 dBm                |
|                                                                        | 50 GHz $< f \leq 54$ GHz <sup>1</sup>                                                                                                           | –132 dBm                |
| Improvement with noise cancellation                                    | for noise-like signals                                                                                                                          |                         |
|                                                                        | 10 MHz $< f \leq 43.5$ GHz                                                                                                                      | 13 dB (nom.)            |
|                                                                        | $f > 43.5$ GHz                                                                                                                                  | 0 dB (nom.)             |

| Displayed average noise level with R&S®FSV3-B24 preamplifier option |                                                                                                                                                               |                         |
|---------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| RF preamplifier = off                                               | RF attenuation = 0 dB, termination = 50 $\Omega$ , normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +20 °C to +30 °C               |                         |
|                                                                     | 3 Hz                                                                                                                                                          | –90 dBm (nom.)          |
|                                                                     | 10 Hz                                                                                                                                                         | –90 dBm (nom.)          |
|                                                                     | 20 Hz                                                                                                                                                         | –100 dBm, typ. –110 dBm |
|                                                                     | 100 Hz                                                                                                                                                        | –110 dBm, typ. –120 dBm |
|                                                                     | 1 kHz                                                                                                                                                         | –120 dBm, typ. –130 dBm |
|                                                                     | RF attenuation = 0 dB, termination = 50 $\Omega$ , logarithmic scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +20 °C to +30 °C                     |                         |
|                                                                     | R&S®FSVA3004, R&S®FSVA3007                                                                                                                                    |                         |
|                                                                     | 9 kHz $\leq f < 100$ kHz                                                                                                                                      | –140 dBm                |
|                                                                     | 100 kHz $\leq f < 1$ MHz                                                                                                                                      | –145 dBm                |
|                                                                     | 1 MHz $\leq f < 1$ GHz                                                                                                                                        | –151 dBm                |
|                                                                     | 1 GHz $\leq f < 3$ GHz                                                                                                                                        | –152 dBm                |
|                                                                     | 3 GHz $\leq f < 6$ GHz                                                                                                                                        | –149 dBm                |
|                                                                     | 6 GHz $\leq f \leq 7.5$ GHz                                                                                                                                   | –148 dBm                |
|                                                                     | R&S®FSVA3013, R&S®FSVA3030                                                                                                                                    |                         |
|                                                                     | 9 kHz $\leq f < 100$ kHz                                                                                                                                      | –140 dBm                |
|                                                                     | 100 kHz $\leq f < 1$ MHz                                                                                                                                      | –145 dBm                |
|                                                                     | 1 MHz $\leq f < 1$ GHz                                                                                                                                        | –150 dBm                |
|                                                                     | 1 GHz $\leq f < 3$ GHz                                                                                                                                        | –150 dBm                |
|                                                                     | 3 GHz $\leq f < 6$ GHz                                                                                                                                        | –147 dBm                |
|                                                                     | 6 GHz $\leq f \leq 7.5$ GHz                                                                                                                                   | –144 dBm                |
|                                                                     | 7.5 GHz $< f \leq 15$ GHz                                                                                                                                     | –148 dBm                |
|                                                                     | 15 GHz $< f \leq 30$ GHz                                                                                                                                      | –144 dBm                |
|                                                                     | R&S®FSVA3044, R&S®FSVA3050                                                                                                                                    |                         |
|                                                                     | 9 kHz $\leq f < 100$ kHz                                                                                                                                      | –140 dBm                |
|                                                                     | 100 kHz $\leq f < 1$ MHz                                                                                                                                      | –145 dBm                |
|                                                                     | 1 MHz $\leq f < 1$ GHz                                                                                                                                        | –150 dBm                |
|                                                                     | 1 GHz $\leq f < 3$ GHz                                                                                                                                        | –150 dBm                |
|                                                                     | 3 GHz $\leq f < 6$ GHz                                                                                                                                        | –147 dBm                |
|                                                                     | 6 GHz $\leq f \leq 7.5$ GHz                                                                                                                                   | –144 dBm                |
|                                                                     | 7.5 GHz $< f \leq 15$ GHz                                                                                                                                     | –148 dBm                |
|                                                                     | 15 GHz $< f \leq 34$ GHz                                                                                                                                      | –143 dBm                |
|                                                                     | 34 GHz $< f \leq 40$ GHz                                                                                                                                      | –140 dBm                |
|                                                                     | 40 GHz $< f \leq 44$ GHz                                                                                                                                      | –136 dBm                |
|                                                                     | 44 GHz $< f \leq 50$ GHz                                                                                                                                      | –131 dBm                |
|                                                                     | 50 GHz $< f \leq 54$ GHz <sup>1</sup>                                                                                                                         | –129 dBm                |
| RF preamplifier = 30 dB                                             | RF attenuation = 0 dB, termination = 50 $\Omega$ , logarithmic scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +20 °C to +30 °C, YIG preselector on |                         |
|                                                                     | R&S®FSVA3004, R&S®FSVA3007, R&S®FSVA3013, R&S®FSVA3030                                                                                                        |                         |
|                                                                     | 10 MHz $\leq f < 50$ MHz                                                                                                                                      | –158 dBm                |
|                                                                     | 50 MHz $\leq f \leq 7.5$ GHz                                                                                                                                  | –166 dBm                |
|                                                                     | 7.5 GHz $< f \leq 13.6$ GHz                                                                                                                                   | –164 dBm                |
|                                                                     | 13.6 GHz $< f \leq 22$ GHz                                                                                                                                    | –162 dBm                |
|                                                                     | 22 GHz $< f \leq 26.5$ GHz                                                                                                                                    | –158 dBm                |
|                                                                     | 26.5 GHz $< f \leq 30$ GHz                                                                                                                                    | –156 dBm                |
|                                                                     | R&S®FSVA3044 <sup>7</sup>                                                                                                                                     |                         |
|                                                                     | 10 MHz $\leq f < 3$ GHz                                                                                                                                       | –166 dBm                |
|                                                                     | 3 GHz $\leq f \leq 7.5$ GHz                                                                                                                                   | –163 dBm                |
|                                                                     | 7.5 GHz $< f \leq 26.5$ GHz                                                                                                                                   | –163 dBm                |
|                                                                     | 26.5 GHz $< f \leq 40$ GHz                                                                                                                                    | –159 dBm                |
|                                                                     | 40 GHz $< f \leq 43.5$ GHz                                                                                                                                    | –151 dBm                |
|                                                                     | R&S®FSVA3050 with R&S®FSV3-B24 option model .49                                                                                                               |                         |
|                                                                     | 10 MHz $\leq f < 2.5$ GHz                                                                                                                                     | –164 dBm                |
|                                                                     | 2.5 GHz $\leq f \leq 7.5$ GHz                                                                                                                                 | –161 dBm                |
|                                                                     | 7.5 GHz $< f \leq 26.5$ GHz                                                                                                                                   | –161 dBm                |
|                                                                     | 26.5 GHz $< f \leq 40$ GHz                                                                                                                                    | –159 dBm                |
|                                                                     | 40 GHz $< f \leq 43.5$ GHz                                                                                                                                    | –149 dBm                |
|                                                                     | 43.5 GHz $< f \leq 50$ GHz                                                                                                                                    | –139 dBm                |
|                                                                     | 50 GHz $< f \leq 54$ GHz <sup>1</sup>                                                                                                                         | –133 dBm                |

| Displayed average noise level with R&S®FSV3-B24 preamplifier option |                                                     |              |
|---------------------------------------------------------------------|-----------------------------------------------------|--------------|
| RF preamplifier = 30 dB<br>(continued)                              | R&S®FSVA3050 with R&S®FSV3-B24 option model .50     |              |
|                                                                     | 10 MHz $\leq$ f < 2.5 GHz                           | –164 dBm     |
|                                                                     | 2.5 GHz $\leq$ f $\leq$ 7.5 GHz                     | –161 dBm     |
|                                                                     | 7.5 GHz < f $\leq$ 26.5 GHz                         | –161 dBm     |
|                                                                     | 26.5 GHz < f $\leq$ 40 GHz                          | –159 dBm     |
|                                                                     | 40 GHz < f $\leq$ 44 GHz                            | –161 dBm     |
|                                                                     | 44 GHz < f $\leq$ 50 GHz                            | –153 dBm     |
|                                                                     | 50 GHz < f $\leq$ 54 GHz <sup>1</sup>               | –147 dBm     |
| Improvement with noise cancellation                                 | for noise-like signals                              |              |
|                                                                     | with R&S®FSV3-B24 option models .07/.13/.30/.44/.49 |              |
|                                                                     | 10 MHz < f $\leq$ 43.5 GHz                          | 13 dB (nom.) |
|                                                                     | f > 43.5 GHz                                        | 0 dB (nom.)  |
|                                                                     | with R&S®FSV3-B24 option model .50                  |              |
|                                                                     | 10 MHz < f $\leq$ 50 GHz/54 GHz <sup>1</sup>        | 13 dB (nom.) |

## Spurious responses

|                                   |                                                                                                                   |                  |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------|------------------|
| Image response                    | YIG preselector on for f > 7.5 GHz, mixer level $\leq$ –10 dBm <sup>8</sup> , sweep optimization: auto or dynamic |                  |
|                                   | 20 MHz $\leq$ f $\leq$ 7.5 GHz                                                                                    |                  |
|                                   | $f_{in} - 2 \times 8796$ MHz (first IF)                                                                           | < –80 dBc (nom.) |
|                                   | $f_{in} - 2 \times 732$ MHz (second IF)                                                                           | < –80 dBc        |
|                                   | $f_{in} - 2 \times 92$ MHz (third IF)                                                                             | < –80 dBc        |
|                                   | 7.5 GHz < f $\leq$ 30 GHz                                                                                         |                  |
|                                   | $f_{in} \pm 2 \times 732$ MHz (first IF)                                                                          | < –80 dBc        |
|                                   | $f_{in} - 2 \times 92$ MHz (second IF)                                                                            | < –80 dBc        |
|                                   | 30 GHz < f $\leq$ 46 GHz                                                                                          |                  |
|                                   | $f_{in} \pm 2 \times 732$ MHz (first IF)                                                                          | < –70 dBc        |
|                                   | $f_{in} - 2 \times 92$ MHz (second IF)                                                                            | < –80 dBc        |
|                                   | 46 GHz < f $\leq$ 50 GHz                                                                                          |                  |
|                                   | $f_{in} - 2 \times 6948$ MHz (first IF)                                                                           | < –70 dBc (nom.) |
|                                   | $f_{in} - 2 \times 732$ MHz (second IF)                                                                           | < –70 dBc (nom.) |
|                                   | $f_{in} - 2 \times 6948$ MHz + $2 \times 732$ MHz                                                                 | < –80 dBc (nom.) |
|                                   | 50 GHz < f $\leq$ 54 GHz <sup>1</sup>                                                                             |                  |
|                                   | $f_{in} - 2 \times 732$ MHz (second IF)                                                                           | < –40 dBc (nom.) |
|                                   | $f_{in} - 2 \times 8412 + 2 \times 732$ MHz <sup>9</sup>                                                          | < –40 dBc (nom.) |
|                                   | $f_{in}$ = external interfering signal frequency                                                                  |                  |
| Intermediate frequency response   | $f_{in}$ = first IF (8796 MHz)                                                                                    | < –80 dBc        |
|                                   | $f_{in}$ = second IF (732 MHz)                                                                                    | < –80 dBc        |
|                                   | $f_{in}$ = third IF (92 MHz)                                                                                      | < –80 dBc        |
|                                   | $f_{in}$ = external interfering signal frequency                                                                  |                  |
| Residual spurious response        | RF attenuation = 0 dB                                                                                             |                  |
|                                   | f $\leq$ 1 MHz                                                                                                    | < –90 dBm        |
|                                   | 1 MHz < f $\leq$ 7.5 GHz                                                                                          | < –103 dBm       |
|                                   | 7.5 GHz < f $\leq$ 50 GHz                                                                                         | < –100 dBm       |
|                                   | f = receive frequency                                                                                             |                  |
| Local oscillator related spurious | f < 15 GHz                                                                                                        |                  |
|                                   | 1 kHz $\leq$ carrier offset $\leq$ 10 MHz                                                                         | < –70 dBc        |
|                                   | carrier offset > 10 MHz                                                                                           | < –80 dBc        |
|                                   | 15 GHz $\leq$ f $\leq$ 30 GHz                                                                                     |                  |
|                                   | 1 kHz $\leq$ carrier offset $\leq$ 10 MHz                                                                         | < –64 dBc        |
|                                   | carrier offset > 10 MHz                                                                                           | < –74 dBc        |
|                                   | 30 GHz < f $\leq$ 50 GHz                                                                                          |                  |
|                                   | 1 kHz $\leq$ carrier offset $\leq$ 10 MHz                                                                         | < –58 dBc        |
|                                   | carrier offset > 10 MHz                                                                                           | < –68 dBc        |
|                                   | f = receive frequency                                                                                             |                  |
|                                   | max. 0.21 g (RMS)                                                                                                 |                  |
| Vibrational environmental stimuli | < –60 dBc + 20 log ( $f_{in}$ /GHz) (nom.)                                                                        |                  |

<sup>8</sup> Mixer level = signal level – RF attenuation + preamplifier gain.

<sup>9</sup>  $f_{in} - 2 \times 8412$  MHz is the image frequency of the first IF for f > 50 GHz.

## Level measurement uncertainty

|                                                     |                                                                                                                 |                                 |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|---------------------------------|
| Absolute level uncertainty at 64 MHz                | RBW = 10 kHz, level –10 dBm, reference level –10 dBm, RF attenuation = 10 dB                                    |                                 |
|                                                     | +20 °C to +30 °C                                                                                                | < 0.2 dB ( $\sigma = 0.07$ dB)  |
|                                                     | 0 °C to +50 °C                                                                                                  | < 0.35 dB ( $\sigma = 0.12$ dB) |
| Frequency response, referenced to 64 MHz            | RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, RF preamplifier = off, electronic attenuator off, +20 °C to +30 °C |                                 |
|                                                     | 9 kHz $\leq f < 10$ MHz                                                                                         | < 0.5 dB ( $\sigma = 0.17$ dB)  |
|                                                     | 10 MHz $\leq f < 3.6$ GHz                                                                                       | < 0.3 dB ( $\sigma = 0.10$ dB)  |
|                                                     | 3.6 GHz $\leq f \leq 7.5$ GHz                                                                                   | < 0.5 dB ( $\sigma = 0.17$ dB)  |
|                                                     | 7.5 GHz $< f \leq 13.6$ GHz, span < 1 GHz                                                                       | < 1.5 dB ( $\sigma = 0.5$ dB)   |
|                                                     | 13.6 GHz $< f \leq 30$ GHz, span < 1 GHz                                                                        | < 2.0 dB ( $\sigma = 0.66$ dB)  |
|                                                     | 30 GHz $< f \leq 43.5$ GHz, span < 1 GHz                                                                        | < 2.5 dB ( $\sigma = 0.83$ dB)  |
|                                                     | 43.5 GHz $< f \leq 50$ GHz, span < 1 GHz                                                                        | < 3.5 dB ( $\sigma = 1.16$ dB)  |
|                                                     | 50 GHz $< f \leq 54$ GHz <sup>1</sup> , span < 1 GHz                                                            | < 3.5 dB (nom.)                 |
|                                                     | any setting of RF attenuation, RF preamplifier = off, 0 °C to +50 °C                                            |                                 |
|                                                     | 9 kHz $\leq f < 3.6$ GHz                                                                                        | < 1.0 dB ( $\sigma = 0.33$ dB)  |
|                                                     | 3.6 GHz $\leq f \leq 7.5$ GHz                                                                                   | < 1.5 dB ( $\sigma = 0.5$ dB)   |
|                                                     | 7.5 GHz $< f \leq 13.6$ GHz                                                                                     | < 2.5 dB ( $\sigma = 0.83$ dB)  |
|                                                     | 13.6 GHz $< f \leq 30$ GHz                                                                                      | < 3.0 dB ( $\sigma = 1.0$ dB)   |
|                                                     | 30 GHz $< f \leq 43.5$ GHz                                                                                      | < 3.5 dB ( $\sigma = 1.17$ dB)  |
|                                                     | 43.5 GHz $< f \leq 50$ GHz                                                                                      | < 4 dB (nom.)                   |
|                                                     | RF attenuation $\leq 10$ dB, RF preamplifier = on <sup>7</sup> , 0 °C to +50 °C                                 |                                 |
|                                                     | 10 MHz $\leq f < 3.6$ GHz                                                                                       | < 1.0 dB ( $\sigma = 0.33$ dB)  |
|                                                     | 3.6 GHz $\leq f \leq 7.5$ GHz                                                                                   | < 1.5 dB ( $\sigma = 0.5$ dB)   |
|                                                     | 7.5 GHz $< f \leq 13.6$ GHz                                                                                     | < 3.0 dB ( $\sigma = 1.0$ dB)   |
|                                                     | 13.6 GHz $< f \leq 30$ GHz                                                                                      | < 3.5 dB ( $\sigma = 1.17$ dB)  |
|                                                     | 30 GHz $< f \leq 43.5$ GHz                                                                                      | < 4.0 dB ( $\sigma = 1.17$ dB)  |
|                                                     | 43.5 GHz $< f \leq 50$ GHz                                                                                      | < 4.5 dB (nom.)                 |
|                                                     | DC coupling, RF preamplifier = off, 0 °C to +50 °C                                                              |                                 |
|                                                     | 10 Hz $\leq f < 20$ Hz <sup>10</sup>                                                                            | < 1.5 dB (nom.)                 |
|                                                     | 20 Hz $\leq f < 9$ kHz                                                                                          | < 1.0 dB ( $\sigma = 0.33$ dB)  |
| Attenuator switching uncertainty                    | f = 64 MHz, 0 dB to 70 dB, referenced to RF attenuation = 10 dB                                                 | < 0.2 dB ( $\sigma = 0.07$ dB)  |
| Uncertainty of reference level setting              |                                                                                                                 | 0 dB <sup>11</sup>              |
| Bandwidth switching uncertainty at center frequency | referenced to RBW = 10 kHz                                                                                      | < 0.1 dB ( $\sigma = 0.04$ dB)  |

### Nonlinearity of displayed level

|                           |                                              |                                 |
|---------------------------|----------------------------------------------|---------------------------------|
| Logarithmic level display | S/N > 16 dB, 0 dB $\geq$ level $\geq$ –70 dB | < 0.1 dB ( $\sigma = 0.033$ dB) |
|                           | S/N > 16 dB, –70 dB > level $\geq$ –80 dB    | < 0.2 dB ( $\sigma = 0.067$ dB) |
| Linear level display      | S/N > 16 dB, 0 dB to –70 dB                  | 5 % of reference level          |

### Total measurement uncertainty

|  |                                                                                                                                                                                                                                  |         |
|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
|  | signal level 0 dB to –70 dB below reference level, S/N > 20 dB, sweep time auto, sweep type = sweep, RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, RF preamplifier = off, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C |         |
|  | 9 kHz $\leq f < 10$ MHz                                                                                                                                                                                                          | 0.39 dB |
|  | 10 MHz $\leq f < 3.6$ GHz                                                                                                                                                                                                        | 0.29 dB |
|  | 3.6 GHz $\leq f \leq 7.5$ GHz                                                                                                                                                                                                    | 0.39 dB |
|  | 7.5 GHz $< f \leq 13.6$ GHz                                                                                                                                                                                                      | 1.00 dB |
|  | 13.6 GHz $< f \leq 30$ GHz                                                                                                                                                                                                       | 1.32 dB |
|  | 30 GHz $< f \leq 43.5$ GHz                                                                                                                                                                                                       | 1.65 dB |
|  | 43.5 GHz $< f \leq 50$ GHz/54 GHz <sup>1</sup>                                                                                                                                                                                   | 1.97 dB |

<sup>10</sup> With R&S®FSV3-B710 option: 3 Hz  $\leq f < 20$  Hz.

<sup>11</sup> The setting of the reference level affects only the graphical representation of the measurement result on the display, not the measurement itself. Therefore, the reference level setting causes no additional uncertainty in measurement results.

## Trigger functions

|                                        |                                                           |                                                                  |
|----------------------------------------|-----------------------------------------------------------|------------------------------------------------------------------|
| <b>Trigger</b>                         |                                                           |                                                                  |
| Trigger source                         | spectrum analysis                                         | free run, video, external, IF power, RF power, periodic time     |
|                                        | I/Q analysis or modulation analysis                       | free run, external, IF power, RF power, periodic time, I/Q power |
| Trigger offset                         | spectrum analysis                                         |                                                                  |
|                                        | span $\geq 10$ Hz                                         | 0 s to 30 s                                                      |
|                                        | span = 0 Hz                                               | (–sweep time) to 30 s                                            |
|                                        | I/Q analysis or modulation analysis                       | –16 s to 16 s, limited by maximum number of pretrigger samples   |
| Trigger resolution                     | spectrum analysis, trigger source external or IF power    |                                                                  |
|                                        | span $\geq 10$ Hz                                         | 7.81 ns (nom.)                                                   |
|                                        | span = 0 Hz, trigger offset $\geq 0$                      | 7.81 ns (nom.)                                                   |
|                                        | span = 0 Hz, trigger offset $< 0$                         | sweep time / number of sweep points                              |
|                                        | I/Q analysis or modulation analysis: see section I/Q data |                                                                  |
| Maximum deviation of trigger offset    |                                                           | 3.91 ns (nom.)                                                   |
| <b>RF power trigger</b>                |                                                           |                                                                  |
| Sensitivity                            | minimum signal power                                      | –40 dBm + RF attenuation – RF preamplifier gain (nom.)           |
|                                        | maximum signal power                                      | 0 dBm + RF attenuation – RF preamplifier gain (nom.)             |
| RF power trigger frequency range       | $500 \text{ MHz} \leq f \leq 7.5 \text{ GHz}$             | $f_{\text{center}} \pm 250 \text{ MHz}$ (nom.) <sup>12</sup>     |
|                                        | $f > 7.5 \text{ GHz}$                                     | $f_{\text{center}} \pm 250 \text{ MHz}$ (nom.)                   |
| <b>IF power trigger</b>                |                                                           |                                                                  |
| Sensitivity                            | minimum signal power                                      | –60 dBm + RF attenuation – RF preamplifier gain (nom.)           |
|                                        | maximum signal power                                      | 0 dBm + RF attenuation – RF preamplifier gain (nom.)             |
| IF power trigger bandwidth             | spectrum analysis                                         |                                                                  |
|                                        | RBW $> 1$ kHz                                             | 40 MHz (nom.)                                                    |
|                                        | RBW $\leq 1$ kHz                                          | 6 MHz (nom.)                                                     |
|                                        | I/Q analysis or modulation analysis: see section I/Q data |                                                                  |
| <b>Gated sweep (FFT or sweep mode)</b> |                                                           |                                                                  |
| Gate source                            |                                                           | external, RF power, IF power, video                              |
| Gate delay                             |                                                           | 7.81 ns to 30 s (nom.)                                           |
| Gate length                            |                                                           | 7.81 ns to 30 s (nom.)                                           |
| Maximum deviation of gate length       |                                                           | 7.81 ns (nom.)                                                   |

<sup>12</sup> For R&S®FSVA3004, R&S®FSVA3007, R&S®FSVA3013 with serial number < 102000, or R&S®FSVA3030, R&S®FSVA3044 with serial number < 101000: –100 MHz to +150 MHz.

## I/Q data

|                                               |                                            |                                        |
|-----------------------------------------------|--------------------------------------------|----------------------------------------|
| Record length                                 |                                            | max. 800 Msample I and Q <sup>13</sup> |
| Maximum number of pretrigger samples          |                                            | 200 Msample I and Q <sup>13</sup>      |
| Word length of I/Q samples                    |                                            | 32 bit for I and 32 bit for Q          |
| I/Q file export                               | supported formats                          | *.iq.tar, *.aid, *.iqw, *.csv, *.mat   |
| Sampling rate                                 | standard                                   | 100 Hz to 128 MHz                      |
|                                               | with R&S®FSV3-B40 option                   | 100 Hz to 128 MHz                      |
|                                               | with R&S®FSV3-B200, R&S®FSV3-B400 options  | 100 Hz to 512 MHz                      |
|                                               | with R&S®FSV3-B601, R&S®FSV3-B1001 options | 100 Hz to 2048 MHz                     |
| Maximum signal analysis bandwidth (equalized) | standard                                   | 28 MHz <sup>14</sup>                   |
|                                               | with R&S®FSV3-B40 option                   | 40 MHz <sup>14</sup>                   |
|                                               | with R&S®FSV3-B200 option                  | 200 MHz <sup>14</sup>                  |
|                                               | with R&S®FSV3-B400 option                  | 400 MHz <sup>14</sup>                  |
|                                               | with R&S®FSV3-B601 option                  | 600 MHz <sup>14</sup>                  |
|                                               | with R&S®FSV3-B1001 option                 | 1000 MHz <sup>14</sup>                 |

|                                                        |                                                                                                          |                                             |
|--------------------------------------------------------|----------------------------------------------------------------------------------------------------------|---------------------------------------------|
| <b>Signal analysis bandwidth ≤ 40 MHz<sup>14</sup></b> |                                                                                                          |                                             |
| Amplitude flatness                                     | (1.25 × signal analysis bandwidth)<br>$\leq f_{\text{center}} \leq 7.5 \text{ GHz}$                      | ±0.3 dB (nom.)                              |
|                                                        | $f_{\text{center}} > 7.5 \text{ GHz}$ , YIG preselector off                                              | ±0.5 dB (nom.)                              |
| Deviation from linear phase                            | (1.25 × signal analysis bandwidth)<br>$\leq f_{\text{center}} \leq 7.5 \text{ GHz}$                      | ±1° (nom.)                                  |
|                                                        | $f_{\text{center}} > 7.5 \text{ GHz}$ , YIG preselector off                                              | ±2° (nom.)                                  |
| Nonlinearity of displayed level                        |                                                                                                          | see section Nonlinearity of displayed level |
| Level measurement uncertainty at center frequency      |                                                                                                          | see section Total measurement uncertainty   |
| Displayed average noise level at center frequency      |                                                                                                          | see section Displayed average noise level   |
| ADC related third order intermodulation distortion     | $f_{\text{center}} \geq 100 \text{ MHz}$ ,<br>two –30 dBm tones at input mixer within analysis bandwidth | –80 dBc (nom.)                              |
| Residual spurious response                             | RF attenuation = 0 dB, $f_{\text{center}} \geq 100 \text{ MHz}$                                          | –90 dBm (nom.)                              |
| Other spurious responses                               |                                                                                                          | see section Spurious responses              |
| IF power trigger bandwidth                             |                                                                                                          | 40 MHz (nom.)                               |
| Trigger resolution                                     | trigger source: external                                                                                 | 3.91 ns (nom.)                              |
|                                                        | trigger source: IF power                                                                                 | 7.81 ns (nom.)                              |

<sup>13</sup> For signal analysis bandwidth > 400 MHz the maximum record length is between 50 % and 100 % of the given figures.

<sup>14</sup> For  $f > 7.5 \text{ GHz}$ , R&S®FSV3-B11 option is required and YIG preselector = off must be set.



| <b>Signal analysis bandwidth 40 MHz to 200 MHz</b> <sup>14, 15, 16</sup> |                                                                                                                                                                         |                                                                          |
|--------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| Amplitude flatness                                                       | RF attenuation $\geq 10$ dB, RF preamplifier = off, YIG preselector off for $f > 7.5$ GHz                                                                               |                                                                          |
|                                                                          | $150 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$                                                                                                                | $\pm 0.5 \text{ dB (nom.)}$ <sup>17</sup>                                |
|                                                                          | $4 \text{ GHz} \leq f_{\text{center}} \leq 7.5 \text{ GHz}$                                                                                                             | $\pm 0.7 \text{ dB (nom.)}$ <sup>17</sup>                                |
|                                                                          | $7.5 \text{ GHz} < f_{\text{center}} \leq 26.5 \text{ GHz}$                                                                                                             | $\pm 1.0 \text{ dB (nom.)}$ <sup>17</sup>                                |
|                                                                          | $26.5 \text{ GHz} < f_{\text{center}} \leq 46 \text{ GHz}$                                                                                                              | $\pm 2.0 \text{ dB (nom.)}$ <sup>17</sup>                                |
|                                                                          | $46 \text{ GHz} < f_{\text{center}} \leq 54 \text{ GHz}$ <sup>1</sup>                                                                                                   | $\pm 2.2 \text{ dB (nom.)}$ <sup>17</sup>                                |
| Deviation from linear phase                                              | RF attenuation $\geq 10$ dB, RF preamplifier = off, YIG preselector off for $f > 7.5$ GHz                                                                               |                                                                          |
|                                                                          | $150 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$                                                                                                                | $\pm 2^\circ \text{ (nom.)}$ <sup>18</sup>                               |
|                                                                          | $4 \text{ GHz} \leq f_{\text{center}} \leq 7.5 \text{ GHz}$                                                                                                             | $\pm 2.5^\circ \text{ (nom.)}$ <sup>18</sup>                             |
|                                                                          | $7.5 \text{ GHz} < f_{\text{center}} \leq 26.5 \text{ GHz}$                                                                                                             | $\pm 3^\circ \text{ (nom.)}$ <sup>18</sup>                               |
|                                                                          | $26.5 \text{ GHz} < f_{\text{center}} \leq 46 \text{ GHz}$                                                                                                              | $\pm 4^\circ \text{ (nom.)}$ <sup>18</sup>                               |
|                                                                          | $46 \text{ GHz} < f_{\text{center}} \leq 54 \text{ GHz}$ <sup>1</sup>                                                                                                   | $\pm 7^\circ \text{ (nom.)}$ <sup>18</sup>                               |
| Nonlinearity of displayed level                                          | 0 dB to $-70$ dB                                                                                                                                                        | $< 0.15 \text{ dB (nom.)}$                                               |
| Level measurement uncertainty at center frequency                        |                                                                                                                                                                         | add 0.2 dB (nom.) to the values in section Total measurement uncertainty |
| Displayed average noise level at center frequency                        |                                                                                                                                                                         | add 5 dB (nom.) to the values in section Displayed average noise level   |
| ADC related third order intermodulation distortion                       | $f_{\text{center}} \geq 150 \text{ MHz}$ ,<br>two $-25 \text{ dBm}$ tones at input mixer<br>within analysis bandwidth                                                   | $-75 \text{ dBc (nom.)}$                                                 |
| Residual spurious response                                               | RF attenuation = 0 dB, $f_{\text{center}} \geq 150 \text{ MHz}$                                                                                                         | $-90 \text{ dBm (nom.)}$                                                 |
| ADC related spurious response                                            | single tone within analysis bandwidth,<br>mixer level = $-10 \text{ dBm}$ <sup>8</sup> ,<br>reference level = signal level,<br>$f_{\text{center}} \geq 150 \text{ MHz}$ | $-75 \text{ dBc (nom.)}$                                                 |
| Other spurious responses                                                 |                                                                                                                                                                         | see section Spurious responses                                           |
| IF power trigger bandwidth                                               |                                                                                                                                                                         | 200 MHz (nom.)                                                           |
| Trigger resolution                                                       | trigger source: external                                                                                                                                                | 3.91 ns (nom.)                                                           |
|                                                                          | trigger source: IF power                                                                                                                                                | 0.997 ns (nom.)                                                          |

| <b>Signal analysis bandwidth 200 MHz to 400 MHz</b> <sup>14, 16, 19</sup> |                                                                                                                       |                                                                          |
|---------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| Amplitude flatness                                                        | RF attenuation $\geq 10$ dB, RF preamplifier = off, YIG preselector off for $f > 7.5$ GHz                             |                                                                          |
|                                                                           | $300 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$                                                              | $\pm 0.7 \text{ dB (nom.)}$ <sup>17</sup>                                |
|                                                                           | $4 \text{ GHz} \leq f_{\text{center}} \leq 7.5 \text{ GHz}$                                                           | $\pm 1.2 \text{ dB (nom.)}$ <sup>17</sup>                                |
|                                                                           | $7.5 \text{ GHz} < f_{\text{center}} \leq 22 \text{ GHz}$                                                             | $\pm 1.6 \text{ dB (nom.)}$ <sup>17</sup>                                |
|                                                                           | $22 \text{ GHz} < f_{\text{center}} \leq 46 \text{ GHz}$                                                              | $\pm 2.0 \text{ dB (nom.)}$ <sup>17</sup>                                |
|                                                                           | $46 \text{ GHz} < f_{\text{center}} \leq 54 \text{ GHz}$ <sup>1</sup>                                                 | $\pm 2.3 \text{ dB (nom.)}$ <sup>17</sup>                                |
| Deviation from linear phase                                               | RF attenuation $\geq 10$ dB, RF preamplifier = off, YIG preselector off for $f > 7.5$ GHz                             |                                                                          |
|                                                                           | $300 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$                                                              | $\pm 4^\circ \text{ (nom.)}$ <sup>18</sup>                               |
|                                                                           | $4 \text{ GHz} \leq f_{\text{center}} \leq 7.5 \text{ GHz}$                                                           | $\pm 6^\circ \text{ (nom.)}$ <sup>18</sup>                               |
|                                                                           | $7.5 \text{ GHz} < f_{\text{center}} \leq 22 \text{ GHz}$                                                             | $\pm 4^\circ \text{ (nom.)}$ <sup>18</sup>                               |
|                                                                           | $22 \text{ GHz} < f_{\text{center}} \leq 46 \text{ GHz}$                                                              | $\pm 5^\circ \text{ (nom.)}$ <sup>18</sup>                               |
|                                                                           | $46 \text{ GHz} < f_{\text{center}} \leq 54 \text{ GHz}$ <sup>1</sup>                                                 | $\pm 8^\circ \text{ (nom.)}$ <sup>18</sup>                               |
| Nonlinearity of displayed level                                           | 0 dB to $-70$ dB                                                                                                      | $< 0.15 \text{ dB (nom.)}$                                               |
| Level measurement uncertainty at center frequency                         |                                                                                                                       | add 0.2 dB (nom.) to the values in section Total measurement uncertainty |
| Displayed average noise level at center frequency                         |                                                                                                                       | add 5 dB (nom.) to the values in section Displayed average noise level   |
| ADC related third order intermodulation distortion                        | $f_{\text{center}} \geq 300 \text{ MHz}$ ,<br>two $-25 \text{ dBm}$ tones at input mixer<br>within analysis bandwidth | $-75 \text{ dBc (nom.)}$                                                 |
| Residual spurious response                                                | RF attenuation = 0 dB, $f_{\text{center}} \geq 300 \text{ MHz}$                                                       | $-90 \text{ dBm (nom.)}$                                                 |

<sup>15</sup> The specifications in this section apply for the R&S®FSV3-B200, R&S®FSV3-B400, R&S®FSV3-B601 and R&S®FSV3-B1001 options in the temperature range from  $+20^\circ\text{C}$  to  $+30^\circ\text{C}$ .

<sup>16</sup> To obtain the set analysis bandwidth,  $(f_{\text{center}} + \frac{1}{2} \text{ analysis bandwidth}) \leq f_{\text{max}}$  must be met;  $f_{\text{max}}$ : maximum frequency of the instrument.

<sup>17</sup> With R&S®FSV3-B24 option installed, add 0.2 dB to the specifications.

<sup>18</sup> With R&S®FSV3-B24 option installed, add  $1^\circ$  to the specifications.

<sup>19</sup> The specifications in this section apply for the R&S®FSV3-B400, R&S®FSV3-B601 and R&S®FSV3-B1001 options in the temperature range from  $+20^\circ\text{C}$  to  $+30^\circ\text{C}$ .

|                               |                                                                                                                 |                                |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------|--------------------------------|
| ADC related spurious response | single tone within analysis bandwidth,<br>mixer level = $-10 \text{ dBm}^8$ ,<br>reference level = signal level |                                |
|                               | $300 \text{ MHz} \leq f_{\text{center}} \leq 7.5 \text{ GHz}$                                                   |                                |
|                               | analysis bandwidth $\leq 300 \text{ MHz}$                                                                       | $-72 \text{ dBc (nom.)}$       |
|                               | analysis bandwidth $> 300 \text{ MHz}$                                                                          | $-70 \text{ dBc (nom.)}$       |
|                               | $f_{\text{center}} > 7.5 \text{ GHz}$                                                                           | $-72 \text{ dBc (nom.)}$       |
| Other spurious responses      |                                                                                                                 | see section Spurious responses |
| IF power trigger bandwidth    |                                                                                                                 | 400 MHz (nom.)                 |
| Trigger resolution            | trigger source: external                                                                                        | 3.91 ns (nom.)                 |
|                               | trigger source: IF power                                                                                        | 0.997 ns (nom.)                |

| Signal analysis bandwidth 400 MHz to 1000 MHz with R&S®FSV3-B601 or R&S®FSV3-B1001 option <sup>14, 16, 20</sup> |                                                                                                                 |                                                                                                   |
|-----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| Amplitude flatness                                                                                              | RF attenuation $\geq 10 \text{ dB}$ , RF preamplifier = off, YIG preselector = off for $f > 7.5 \text{ GHz}$    |                                                                                                   |
|                                                                                                                 | $600 \text{ MHz} \leq f_{\text{center}} \leq 22 \text{ GHz}$                                                    | $\pm 1.8 \text{ dB (nom.)}^{17}$                                                                  |
|                                                                                                                 | $22 \text{ GHz} < f_{\text{center}} \leq 46 \text{ GHz}$                                                        | $\pm 2.2 \text{ dB (nom.)}^{17}$                                                                  |
|                                                                                                                 | $46 \text{ GHz} < f_{\text{center}} \leq 54 \text{ GHz}^1$                                                      | $\pm 2.5 \text{ dB (nom.)}^{17}$                                                                  |
| Deviation from linear phase                                                                                     | RF attenuation $\geq 10 \text{ dB}$ , RF preamplifier = off, YIG preselector = off for $f > 7.5 \text{ GHz}$    |                                                                                                   |
|                                                                                                                 | $600 \text{ MHz} \leq f_{\text{center}} \leq 22 \text{ GHz}$                                                    | $\pm 7^\circ \text{ (nom.)}^{18}$                                                                 |
|                                                                                                                 | $22 \text{ GHz} < f_{\text{center}} \leq 46 \text{ GHz}$                                                        | $\pm 8^\circ \text{ (nom.)}^{18}$                                                                 |
|                                                                                                                 | $46 \text{ GHz} < f_{\text{center}} \leq 54 \text{ GHz}^1$                                                      | $\pm 10^\circ \text{ (nom.)}^{18}$                                                                |
| Nonlinearity of displayed level                                                                                 | 0 dB to $-70 \text{ dB}$                                                                                        | 0.2 dB (nom.)                                                                                     |
| Level measurement uncertainty at center frequency                                                               |                                                                                                                 | add 0.2 dB (nom.) to the values in section Total measurement uncertainty                          |
| Displayed average noise level at center frequency                                                               |                                                                                                                 | add 5 dB (nom.) to the values in section Displayed average noise level                            |
| ADC related third order intermodulation distortion                                                              | two $-25 \text{ dBm}$ tones at input mixer within analysis bandwidth                                            | $-75 \text{ dBc (nom.)}$                                                                          |
| Residual spurious response                                                                                      | RF attenuation = 0 dB                                                                                           | $f_{\text{center}} \leq 7.5 \text{ GHz}$ :<br>$-80 \text{ dBm (nom.)}$ , $-90 \text{ dBm (typ.)}$ |
|                                                                                                                 |                                                                                                                 | $f_{\text{center}} > 7.5 \text{ GHz}$ : $-90 \text{ dBm (nom.)}$                                  |
| ADC related spurious response                                                                                   | single tone within analysis bandwidth,<br>mixer level = $-10 \text{ dBm}^8$ ,<br>reference level = signal level | $-72 \text{ dBc (nom.)}$                                                                          |
| Other spurious responses                                                                                        | signal within $f_{\text{center}} \pm 500 \text{ MHz}$                                                           | see section Spurious responses                                                                    |
| IF power trigger bandwidth                                                                                      |                                                                                                                 | 1000 MHz (nom.)                                                                                   |
| Trigger resolution                                                                                              | trigger source: external                                                                                        | 3.91 ns (nom.)                                                                                    |
|                                                                                                                 | trigger source: IF power                                                                                        |                                                                                                   |
|                                                                                                                 | analysis bandwidth $\leq 800 \text{ MHz}$                                                                       | 0.977 ns (nom.)                                                                                   |
|                                                                                                                 | analysis bandwidth $> 800 \text{ MHz}$                                                                          | 0.488 ns (nom.)                                                                                   |

<sup>20</sup> The specifications in this section apply for the R&S®FSV3-B601 and R&S®FSV3-B1001 options in the temperature range from  $+20^\circ \text{C}$  to  $+30^\circ \text{C}$ .

## Inputs and outputs

|                                           |                                            |                                            |
|-------------------------------------------|--------------------------------------------|--------------------------------------------|
| <b>RF input</b>                           |                                            |                                            |
| Impedance                                 |                                            | 50 $\Omega$                                |
| Connector                                 | R&S®FSVA3004, R&S®FSVA3007, R&S®FSVA3013   | type N, female                             |
|                                           | R&S®FSVA3030                               | APC 3.5 mm male (compatible with SMA)      |
|                                           | R&S®FSVA3044                               | 2.92 mm male (compatible with SMA)         |
|                                           | R&S®FSVA3050                               | 1.85 mm male                               |
| VSWR of R&S®FSVA3004, R&S®FSVA3007        | RF attenuation $\geq 10$ dB                |                                            |
|                                           | 10 MHz $\leq f < 1$ GHz                    | $< 1.2$ , typ. 1.09 <sup>21</sup>          |
|                                           | 1 GHz $\leq f < 3.6$ GHz                   | $< 1.5$ , typ. 1.19 <sup>21</sup>          |
|                                           | 3.6 GHz $\leq f \leq 7.5$ GHz              | $< 2.0$ , typ. 1.42 <sup>21</sup>          |
|                                           | 5 dB $\leq$ RF attenuation $\leq 9$ dB     |                                            |
|                                           | 10 MHz $\leq f < 3.6$ GHz                  | $< 1.5$ , typ. 1.31 <sup>21</sup>          |
|                                           | 3.6 GHz $\leq f \leq 7.5$ GHz              | $< 2.0$ , typ. 1.51 <sup>21</sup>          |
|                                           | RF attenuation $\leq 4$ dB, DC coupled     |                                            |
|                                           | 10 MHz $\leq f < 7.5$ GHz                  | typ. 1.87 <sup>21</sup>                    |
|                                           | RF attenuation $\geq 10$ dB                |                                            |
| VSWR of R&S®FSVA3013, R&S®FSVA3030        | 10 MHz $\leq f < 3.5$ GHz, DC coupled      | $< 1.2$ , typ. 1.12 <sup>21</sup>          |
|                                           | 10 MHz $\leq f < 3.5$ GHz, AC coupled      | $< 1.3$ , typ. 1.15 <sup>21</sup>          |
|                                           | 3.5 GHz $\leq f \leq 18$ GHz               | $< 1.6$ , typ. 1.22 <sup>21</sup>          |
|                                           | 18 GHz $< f \leq 26.5$ GHz                 | $< 2.0$ , typ. 1.37 <sup>21</sup>          |
|                                           | 26.5 GHz $< f \leq 30$ GHz                 | $< 2.5$ , typ. 1.70 <sup>21</sup>          |
|                                           | 5 dB $\leq$ RF attenuation $\leq 9$ dB     |                                            |
|                                           | 10 MHz $\leq f < 3.5$ GHz                  | $< 1.5$ , typ. 1.24 <sup>21</sup>          |
|                                           | 3.5 GHz $\leq f \leq 18$ GHz               | $< 1.8$ , typ. 1.39 <sup>21</sup>          |
|                                           | 18 GHz $< f \leq 26.5$ GHz                 | $< 2.2$ , typ. 1.43 <sup>21</sup>          |
|                                           | 26.5 GHz $< f \leq 30$ GHz                 | $< 2.5$ , typ. 1.80 <sup>21</sup>          |
|                                           | RF attenuation $\leq 4$ dB, DC coupled     |                                            |
|                                           | 10 MHz $\leq f \leq 7.5$ GHz               | typ. 2.0 <sup>21</sup>                     |
|                                           | 7.5 GHz $< f \leq 26.5$ GHz                | typ. 2.5 <sup>21</sup>                     |
|                                           | 26.5 GHz $< f \leq 30$ GHz                 | typ. 3.0 <sup>21</sup>                     |
| VSWR of R&S®FSVA3044, R&S®FSVA3050        | RF attenuation $\geq 5$ dB                 |                                            |
|                                           | 10 MHz $\leq f \leq 3.5$ GHz               | $< 1.5$ , typ. 1.3 <sup>21</sup>           |
|                                           | 3.5 GHz $\leq f \leq 18$ GHz               | $< 2.0$ , typ. 1.8 <sup>21</sup>           |
|                                           | 18 GHz $< f \leq 26.5$ GHz                 | $< 2.2$ , typ. 2.0 <sup>21</sup>           |
|                                           | 26.5 GHz $< f \leq 40$ GHz                 | $< 2.5$ , typ. 2.2 <sup>21</sup>           |
|                                           | 40 GHz $< f \leq 50$ GHz                   | $< 2.5$ (nom.)                             |
|                                           | RF attenuation $\leq 4$ dB, DC coupled     |                                            |
|                                           | 10 MHz $\leq f \leq 7.5$ GHz               | typ. 2.0 <sup>21</sup>                     |
|                                           | 7.5 GHz $< f \leq 26.5$ GHz                | typ. 2.5 <sup>21</sup>                     |
|                                           | 26.5 GHz $< f \leq 40$ GHz                 | typ. 3.0 <sup>21</sup>                     |
| Setting range of RF attenuator            |                                            | 0 dB to 75 dB, in 1 dB steps <sup>22</sup> |
| Setting range of electronic RF attenuator | with R&S®FSV3-B25 option, $f \leq 7.5$ GHz | 0 dB to 25 dB, in 1 dB steps               |

### Probe power supply

|                 |  |                                                     |
|-----------------|--|-----------------------------------------------------|
| Supply voltages |  | +15 V DC, -12.6 V DC and ground, max. 150 mA (nom.) |
|-----------------|--|-----------------------------------------------------|

### Noise source control and power sensor

|                                     |                           |                                                                                         |
|-------------------------------------|---------------------------|-----------------------------------------------------------------------------------------|
| Connector                           |                           | 7-pin LEMOSA female, for R&S®FS-SNSxx smart noise sources and R&S®NRP-Zxx power sensors |
|                                     | with R&S®FSV3-B28V option | BNC female, for noise source control additionally                                       |
| Noise source control output voltage |                           | 0 V/28 V, switchable, max. 100 mA (nom.)                                                |

<sup>21</sup> Typical VSWR performance: performance expected to be met in 95 % of the cases with a confidence level of 95 %, temperature range from +20 °C to +30 °C, input set to "DC coupling". These values are not warranted and are subject to modification if a significant change in the statistical behavior of production instruments is observed.

<sup>22</sup> Mechanical RF attenuator with 5 dB steps and electronic attenuator with 1 dB steps. The electronic attenuator is located in the signal path behind the mechanical attenuator and the RF preamplifier (R&S®FSV3-B24 option) on the RF for  $f \leq 7.5$  GHz, on the IF for  $f > 7.5$  GHz.

|                      |                                             |                                                                    |
|----------------------|---------------------------------------------|--------------------------------------------------------------------|
| <b>USB interface</b> | front panel                                 | 3 ports, type A plug, version 2.0                                  |
|                      | rear panel                                  | 2 ports, type A plug, version 3.1<br>(1 × 10 Gbit/s, 1 × 5 Gbit/s) |
|                      | output current                              | 0.5 A (nom.), version 2.0;<br>0.9 A (nom.), version 3.1            |
|                      | maximum sum of output current via USB ports | 2 A (nom.)                                                         |

|                          |  |                                                   |
|--------------------------|--|---------------------------------------------------|
| <b>Reference input 1</b> |  |                                                   |
| Connector                |  | BNC female                                        |
| Impedance                |  | 50 Ω                                              |
| Input frequency range    |  | 1 MHz ≤ f <sub>in</sub> ≤ 100 MHz, in 1 ppm steps |
| Required level           |  | > 0 dBm, < 15 dBm into 50 Ω                       |

|                          |                           |                                                          |
|--------------------------|---------------------------|----------------------------------------------------------|
| <b>Reference input 2</b> |                           |                                                          |
| Connector                |                           | SMA                                                      |
| Impedance                |                           | 50 Ω                                                     |
| Input frequencies        | with R&S®FSV3-K703 option | 10 MHz, 100 MHz, 128 MHz, 640 MHz,<br>1000 MHz, 1280 MHz |
| Required level           |                           | > 3 dBm, < 13 dBm into 50 Ω                              |

|                           |                    |                                      |
|---------------------------|--------------------|--------------------------------------|
| <b>Reference output 1</b> |                    |                                      |
| Connector                 |                    | BNC female                           |
| Impedance                 |                    | 50 Ω                                 |
| Output frequency          | internal reference | 10 MHz                               |
|                           | external reference | same as reference input 1 or input 2 |
| Level                     |                    | > 0 dBm (nom.)                       |

|                           |                           |               |
|---------------------------|---------------------------|---------------|
| <b>Reference output 2</b> |                           |               |
| Connector                 |                           | SMA female    |
| Impedance                 |                           | 50 Ω          |
| Output frequency          | with R&S®FSV3-K703 option | 640 MHz       |
| Level                     |                           | 10 dBm (nom.) |

|                                    |                         |                                |
|------------------------------------|-------------------------|--------------------------------|
| <b>External trigger/gate input</b> |                         |                                |
| Number of ports                    |                         | 2 × input/output, selectable   |
|                                    | with R&S®FSV3-B5 option | 1 × output additionally        |
| Connector                          |                         | BNC female                     |
| Trigger input voltage              |                         | 0.5 V to 3.5 V (nom.)          |
| Trigger output voltage             |                         | TTL-compatible, 0 V/5 V (nom.) |
| Input impedance                    |                         | 10 kΩ (nom.)                   |

|                             |                         |                                                                                   |
|-----------------------------|-------------------------|-----------------------------------------------------------------------------------|
| <b>IEC/IEEE bus control</b> |                         |                                                                                   |
| Command set                 |                         | interface in line with IEC 625-2<br>(IEEE 488.2)                                  |
| Connector                   | with R&S®FSV3-B5 option | SCPI 1997.0                                                                       |
| Interface functions         |                         | 24-pin Amphenol female (GPIB)<br>SH1, AH1, T6, L4, SR1, RL1, PP1, DC1,<br>DT1, C0 |

|                      |                         |                       |
|----------------------|-------------------------|-----------------------|
| <b>LAN interface</b> | standard                | 10/100/1000BASE-T     |
|                      | with R&S®FSV3-B6 option | 10GBASE-T in addition |
| Connector            |                         | RJ-45                 |

|                         |  |                                |
|-------------------------|--|--------------------------------|
| <b>External monitor</b> |  |                                |
| Connectors              |  | HDMI 2.0, DisplayPort Rev. 1.3 |

## General data

|                                         |                                          |                                                                                                                                                      |
|-----------------------------------------|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Display</b>                          |                                          | LCD TFT color display (10.1")                                                                                                                        |
| Resolution                              |                                          | 1280 × 800 pixel (WXGA resolution)                                                                                                                   |
| Pixel failure rate                      |                                          | $< 1 \times 10^{-5}$                                                                                                                                 |
| <b>Data storage</b>                     |                                          |                                                                                                                                                      |
| Internal                                |                                          | solid-state drive $\geq 120$ Gbyte (nom.)                                                                                                            |
|                                         | with R&S®FSV3-B20 option                 | solid-state drive $\geq 50$ Gbyte (nom.)                                                                                                             |
| External                                |                                          | support of USB 2.0 and USB 3.0 compatible memory devices                                                                                             |
| <b>Environmental conditions</b>         |                                          |                                                                                                                                                      |
| Temperature                             | operating temperature range              | +0 °C to +50 °C                                                                                                                                      |
|                                         | storage temperature range                | −40 °C to +70 °C                                                                                                                                     |
| Climatic loading                        |                                          | +40 °C at 90 % rel. humidity, without condensation, in line with EN 60068-2-30                                                                       |
| Maximum operating altitude              | above sea level                          | 4600 m (approx. 15100 ft)                                                                                                                            |
| <b>Mechanical resistance</b>            |                                          |                                                                                                                                                      |
| Vibration                               | sinusoidal                               | 5 Hz to 55 Hz,<br>0.15 mm constant amplitude,<br>(1.8 g at 55 Hz);<br>55 Hz to 150 Hz,<br>acceleration: 0.5 g constant;<br>in line with EN 60068-2-6 |
|                                         | random                                   | 8 Hz to 500 Hz, acceleration: 1.2 g (RMS),<br>in line with EN 60068-2-64                                                                             |
| Shock                                   |                                          | 40 g shock spectrum, in line with MIL-STD-810E, method no. 516.4, procedure I, MIL-PRF-28800F, class 3                                               |
| <b>EMC</b>                              |                                          | in line with EMC Directive 2014/30/EU including:<br>• IEC/EN 61326-1 <sup>23</sup><br>• CISPR 11/EN 55011 <sup>24</sup>                              |
| <b>EU legislation</b>                   | for details, see user documentation      | EU: in line with Data Act - Regulation (EU) 2023/2854                                                                                                |
| <b>Recommended calibration interval</b> |                                          | 2 years                                                                                                                                              |
| <b>Power supply</b>                     |                                          |                                                                                                                                                      |
| AC supply                               |                                          | 100 V to 240 V, max. 3.5 A;<br>50 Hz to 60 Hz, 400 Hz,<br>protection class I, in line with VDE 411                                                   |
| Safety                                  |                                          | in line with EN 61010-1, IEC 61010-1, UL 61010-1, CAN/CSA-C22.2 no. 61010-1                                                                          |
| Test marks                              |                                          | CE, VDE, cCSA <sub>US</sub> , KC                                                                                                                     |
| <b>Power consumption</b>                |                                          |                                                                                                                                                      |
| Operating                               | R&S®FSVA3004, R&S®FSVA3007               | 120 W (nom.),<br>max. 250 W with all options                                                                                                         |
|                                         | R&S®FSVA3013, R&S®FSVA3030, R&S®FSVA3044 | 170 W (nom.),<br>max. 300 W with all options                                                                                                         |
|                                         | R&S®FSVA3050                             | 200 W (nom.),<br>max. 330 W with all options                                                                                                         |
| Non-operating                           | standby (all models)                     |                                                                                                                                                      |
|                                         | without R&S®FSV3-B4 option               | 5 W (nom.)                                                                                                                                           |
|                                         | with R&S®FSV3-B4 option                  | 8 W (nom.)                                                                                                                                           |
|                                         | power off (all models)                   | 0 W (nom.)                                                                                                                                           |

<sup>23</sup> Immunity test requirement for industrial environment (EN 61326 table 2).

<sup>24</sup> Emission limits for class A equipment apply.

| Dimensions and weight             |                            |                                                             |
|-----------------------------------|----------------------------|-------------------------------------------------------------|
| Dimensions (nom.)                 | W × H × D                  | 462 mm × 197 mm × 417 mm<br>(18.15 in × 7.76 in × 16.42 in) |
| Net weight without options (nom.) | R&S®FSVA3004, R&S®FSVA3007 | 12.2 kg (26.9 lb)                                           |
|                                   | R&S®FSVA3013               | 13.6 kg (30 lb)                                             |
|                                   | R&S®FSVA3030               | 13.8 kg (30.44 lb)                                          |
|                                   | R&S®FSVA3044               | 14.6 kg (32.2 lb)                                           |
|                                   | R&S®FSVA3050               | 15.6 kg (34.4 lb)                                           |

## Options

### R&S®FSV3-B3 audio demodulator

| Demodulation                      |  |                            |
|-----------------------------------|--|----------------------------|
| AF demodulation types             |  | AM and FM                  |
| Audio output                      |  | loudspeaker and phone jack |
| Marker stop time in spectrum mode |  | 100 ms to 60 s             |

| AF output            |  |                         |
|----------------------|--|-------------------------|
| Connector            |  | 3.5 mm mini jack        |
| Output impedance     |  | 32 Ω                    |
| Open-circuit voltage |  | up to 1.5 V, adjustable |

### R&S®FSV3-B5 and R&S®FSV3-B5E additional interfaces

| IF output                           |                                                              |                                                     |
|-------------------------------------|--------------------------------------------------------------|-----------------------------------------------------|
| Connector                           |                                                              | BNC female, 50 Ω                                    |
| Bandwidth                           |                                                              | equal to bandwidth setting                          |
| IF frequency                        |                                                              | (50 kHz + ½ RBW) to<br>(53 MHz – ½ RBW), selectable |
| Output level (gain versus RF input) | RF attenuation = 0 dB,<br>RF preamplifier = off, span = 0 Hz | 0 dB (nom.)                                         |

| Video output   |                                                                                              |                            |
|----------------|----------------------------------------------------------------------------------------------|----------------------------|
| Connector      |                                                                                              | BNC female, 50 Ω           |
| Bandwidth      |                                                                                              | equal to bandwidth setting |
| Output scaling | logarithmic display scale                                                                    | logarithmic                |
|                | linear display scale                                                                         | linear                     |
| Output level   | center frequency > 10 MHz, span = 0 Hz,<br>signal at reference level and center<br>frequency | 1 V at 50 Ω load (nom.)    |
| Trigger out    |                                                                                              |                            |
| Connector      |                                                                                              | BNC female                 |
| Output         |                                                                                              | TTL-compatible, 0 V/5 V    |

| AUX port  |  |                                                      |
|-----------|--|------------------------------------------------------|
| Connector |  | 9-pin D-Sub male                                     |
| Output    |  | TTL-compatible, 0 V/5 V (nom.),<br>max. 15 mA (nom.) |
| Input     |  | TTL-compatible, max. 5 V (nom.)                      |

| AUX control (for external generator control) |  |                    |
|----------------------------------------------|--|--------------------|
| AUX control                                  |  | 9-pin D-Sub female |

| GPIB interface (not available for R&S®FSV3-B5E) |  |                        |
|-------------------------------------------------|--|------------------------|
| IEC/IEEE bus control                            |  | 24-pin Amphenol female |

## R&S®FSV3-B10 external generator control

|                                     |                             |                                                                                                                                                                                                      |
|-------------------------------------|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Supported signal generators         |                             | R&S®SGS100A, R&S®SGT100A, R&S®SMA100A, R&S®SMA100B, R&S®SMB100A, R&S®SMB100B, R&S®SMBV100A, R&S®SMBV100B, R&S®SMC100A, R&S®SMCV100B, R&S®SMF100A, R&S®SMJ100A, R&S®SMM100A, R&S®SMU200A, R&S®SMW200A |
| Synchronization handshake interface | standard                    | LAN                                                                                                                                                                                                  |
|                                     | with R&S®FSV3-B5/B5E option | LAN, TTL                                                                                                                                                                                             |

## R&S®FSV3-B21 LO/IF connections for external mixers (not available for R&S®FSVA3004, R&S®FSVA3007, R&S®FSVA3013)

|                          |                  |                           |
|--------------------------|------------------|---------------------------|
| <b>LO signal</b>         |                  |                           |
| Frequency range          |                  | 8.05 GHz to 16.4 GHz      |
| Output level             |                  | +13 dBm to +17 dBm (nom.) |
| Accuracy of set LO level | +20 °C to +30 °C | ±1.5 dB                   |
|                          | +5 °C to +40 °C  | ±3 dB                     |

|                                   |                                                                                                                             |                |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------|----------------|
| <b>IF input</b>                   |                                                                                                                             |                |
| Supported mixer types             |                                                                                                                             | 3-port mixer   |
| IF frequency                      | set signal analysis bandwidth                                                                                               |                |
|                                   | ≤ 40 MHz                                                                                                                    | 732 MHz        |
|                                   | > 40 MHz to 400 MHz                                                                                                         | 768 MHz        |
|                                   | > 400 MHz                                                                                                                   | 1536 MHz       |
| Full-scale level                  | compression < 1 dB                                                                                                          |                |
|                                   | IF input, front panel                                                                                                       | –20 dBm (nom.) |
| Level uncertainty at IF frequency | IF input level = reference level = –25 dBm, RBW = 30 kHz, mixer conversion loss set to 0 dB IF input connector, front panel |                |
|                                   | +20 °C to +30 °C                                                                                                            | < 1 dB         |
|                                   | +5 °C to +40 °C                                                                                                             | < 3 dB         |

|                           |  |                  |
|---------------------------|--|------------------|
| <b>Inputs and outputs</b> |  |                  |
| LO output/IF input        |  | SMA female, 50 Ω |
| IF input                  |  | SMA female, 50 Ω |

## R&S®FSV3-B24 RF preamplifier

|                  |                                        |                    |
|------------------|----------------------------------------|--------------------|
| <b>Frequency</b> |                                        |                    |
| Frequency range  | R&S®FSVA3004                           | 10 MHz to 4 GHz    |
|                  | R&S®FSVA3007                           | 10 MHz to 7.5 GHz  |
|                  | R&S®FSVA3013                           | 10 MHz to 13.6 GHz |
|                  | R&S®FSVA3030                           | 10 MHz to 30 GHz   |
|                  | R&S®FSVA3044                           | 10 MHz to 43.5 GHz |
|                  | R&S®FSVA3050                           | 10 MHz to 50 GHz   |
|                  | R&S®FSVA3050 with R&S®FSV3-B54G option | 10 MHz to 54 GHz   |

|                      |                                                                                    |                                 |
|----------------------|------------------------------------------------------------------------------------|---------------------------------|
| <b>Setting range</b> |                                                                                    |                                 |
| RF preamplifier gain | R&S®FSVA3004, R&S®FSVA3007, R&S®FSVA3013, R&S®FSVA3030, R&S®FSVA3044, R&S®FSVA3050 | 15 dB/30 dB (nom.) (selectable) |

|                               |  |                             |
|-------------------------------|--|-----------------------------|
| <b>Other specifications</b>   |  |                             |
| Level measurement uncertainty |  | see base unit specification |
| Displayed average noise level |  |                             |
| Intermodulation               |  |                             |
| Measurement uncertainty       |  |                             |

## R&S®FSV3-B25 electronic attenuator

|                               |  |                              |
|-------------------------------|--|------------------------------|
| Frequency range               |  | 10 Hz to 7.5 GHz             |
| Setting range                 |  | 0 dB to 25 dB, in 1 dB steps |
| Level measurement uncertainty |  | see base unit specification  |
| Displayed average noise level |  | see base unit specification  |

### Intermodulation

|                                   |                                                                                       |                             |
|-----------------------------------|---------------------------------------------------------------------------------------|-----------------------------|
| Third order intercept point (TOI) | electronic attenuator off or<br>electronic attenuator on and<br>RF attenuation = 0 dB | see base unit specification |
|                                   | electronic attenuator on, RF attenuation = 30 dB                                      |                             |
|                                   | 10 MHz to 7.5 GHz                                                                     |                             |
|                                   |                                                                                       | 40 dBm (nom.)               |

## R&S®FSV3-B271 analog baseband inputs

### Frequency

|                             |                |                     |
|-----------------------------|----------------|---------------------|
| Frequency range (equalized) | I only, Q only | DC to 200 MHz       |
|                             | I + jQ         | –200 MHz to 200 MHz |

### Spectral purity

|             |                  |                        |
|-------------|------------------|------------------------|
| Phase noise | offset 1 kHz     | –127 dBc (1 Hz) (nom.) |
|             | offset 10 kHz    | –131 dBc (1 Hz) (nom.) |
|             | offset ≥ 100 kHz | –137 dBc (1 Hz) (nom.) |

### Inputs

|                                  |                           |                                                                                                                             |
|----------------------------------|---------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Connectors                       | I and Q                   | BNC female, 50 Ω (nom.);<br>the I and Q inputs additionally support<br>Rohde & Schwarz oscilloscope probes<br>(see page 34) |
|                                  | T and $\bar{Q}$           | BNC female, 50 Ω (nom.)                                                                                                     |
| Maximum safe input voltage       | any input, sum of DC + AC | ±3 V                                                                                                                        |
| Input voltage range (full scale) | peak voltage              | ±2 V, ±1 V, ±0.5 V, ±0.25 V                                                                                                 |
| Maximum common mode input range  |                           | –2 V to 2 V                                                                                                                 |
| Input impedance                  | single-ended              | 50 Ω (nom.)                                                                                                                 |
|                                  | differential              | 100 Ω (nom.)                                                                                                                |
|                                  | common mode at DC         | 150 Ω (nom.)                                                                                                                |
| Input return loss                | 0 Hz to 80 MHz            | –28 dB (nom.)                                                                                                               |
|                                  | 80 MHz to 200 MHz         | –24 dB (nom.)                                                                                                               |

### Amplitude

|                               |                                                                           |                |
|-------------------------------|---------------------------------------------------------------------------|----------------|
| Absolute amplitude accuracy   | $f_{\text{input}} = 1 \text{ MHz}$ ,<br>input voltage = full scale – 6 dB | ±0.25 dB       |
| Amplitude linearity           | 0 dB to –80 dB relative to full scale                                     | ±0.1 dB (nom.) |
| Frequency response            |                                                                           |                |
| Amplitude                     | relative to 1 MHz                                                         |                |
|                               | 0 Hz to 80 MHz                                                            | ±0.15 dB       |
|                               | 80 MHz to 160 MHz                                                         | ±0.25 dB       |
|                               | 160 MHz to 200 MHz                                                        | ±0.35 dB       |
| Deviation from linear phase   | 0 Hz to 80 MHz                                                            | ±1° (nom.)     |
|                               | 80 MHz to 160 MHz                                                         | ±1.5° (nom.)   |
|                               | 160 MHz to 200 MHz                                                        | ±2° (nom.)     |
| Channel match (I/Q imbalance) |                                                                           |                |
| Amplitude match accuracy      | 0 Hz to 160 MHz                                                           | ±0.10 dB (2σ)  |
|                               | 160 MHz to 200 MHz                                                        | ±0.15 dB (2σ)  |
| Phase match accuracy          | 0 Hz to 80 MHz                                                            | ±0.4° (nom.)   |
|                               | 80 MHz to 200 MHz                                                         | ±1.0° (nom.)   |



|                                        |                                                           |                                                          |
|----------------------------------------|-----------------------------------------------------------|----------------------------------------------------------|
| <b>Dynamic range</b>                   |                                                           |                                                          |
| Crosstalk                              | 0 Hz to 200 MHz                                           | –80 dB (nom.)                                            |
| Signal-to-noise ratio                  | any input range, relative to full scale                   | 142 dBc (1 Hz) (nom.)                                    |
| Displayed average noise level (RMS)    | 5 MHz to 200 MHz                                          |                                                          |
|                                        | range                                                     |                                                          |
|                                        | ±2 V peak                                                 | –128 dBm (1 Hz) (89 nV ( $\sqrt{1 \text{ Hz}}$ )) (nom.) |
|                                        | ±1 V peak                                                 | –134 dBm (1 Hz) (45 nV ( $\sqrt{1 \text{ Hz}}$ )) (nom.) |
|                                        | ±0.5 V peak                                               | –140 dBm (1 Hz) (23 nV ( $\sqrt{1 \text{ Hz}}$ )) (nom.) |
|                                        | ±0.25 V peak                                              | –146 dBm (1 Hz) (12 nV ( $\sqrt{1 \text{ Hz}}$ )) (nom.) |
| Residual DC (I/Q offset)               | relative to full scale, 50 $\Omega$ termination           | –54 dB (nom.)                                            |
| Residual response                      | range $\pm 0.25$ V peak                                   | –80 dBm (nom.), –90 dBm (typ.)                           |
| Spurious response                      | with full scale input signal                              |                                                          |
|                                        | 0 Hz to 200 MHz                                           | –70 dBc (nom.)                                           |
| Third order intermodulation distortion | two CW signals, voltage = full scale – 6 dB (each signal) |                                                          |
|                                        | 0 Hz to 80 MHz                                            | –80 dBc (nom.)                                           |
|                                        | 80 MHz to 200 MHz, differential                           | –80 dBc (nom.)                                           |
|                                        | 80 MHz to 200 MHz, single-ended                           | –74 dBc (nom.)                                           |

## R&S®FSV3-K980 health and utilization monitoring service (HUMS)

|            |                                                                 |                                                                                                       |
|------------|-----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Interfaces | protocols and interfaces supported for data readout and display | SNMP (v1, v2c, v3)                                                                                    |
|            |                                                                 | REST (JSON)                                                                                           |
|            |                                                                 | SCPI                                                                                                  |
|            |                                                                 | device web                                                                                            |
| Services   | information provided                                            | device information<br>(model, serial number, BIOS, date, time, system, HUMS and software information) |
|            |                                                                 | user-defined information tags<br>(e.g. for asset management)                                          |
|            |                                                                 | equipment information<br>(hardware, options, software, licenses)                                      |
|            |                                                                 | system operating status                                                                               |
|            |                                                                 | instrument security information                                                                       |
|            |                                                                 | service related information (due dates etc.)                                                          |
|            |                                                                 | mass storage related information                                                                      |
|            |                                                                 | instrument utilization data                                                                           |
|            |                                                                 | device history (event log)                                                                            |

## Ordering information

| Designation                                                                                                                                                                                                                                                                    | Type         | Order No.    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------|
| Signal and spectrum analyzer, 10 Hz to 4 GHz                                                                                                                                                                                                                                   | R&S®FSVA3004 | 1330.5000.05 |
| Signal and spectrum analyzer, 10 Hz to 7.5 GHz                                                                                                                                                                                                                                 | R&S®FSVA3007 | 1330.5000.08 |
| Signal and spectrum analyzer, 10 Hz to 13.6 GHz                                                                                                                                                                                                                                | R&S®FSVA3013 | 1330.5000.14 |
| Signal and spectrum analyzer, 10 Hz to 30 GHz                                                                                                                                                                                                                                  | R&S®FSVA3030 | 1330.5000.31 |
| Signal and spectrum analyzer, 10 Hz to 44 GHz                                                                                                                                                                                                                                  | R&S®FSVA3044 | 1330.5000.44 |
| Signal and spectrum analyzer, 10 Hz to 50 GHz                                                                                                                                                                                                                                  | R&S®FSVA3050 | 1330.5000.51 |
| <b>Accessories supplied</b>                                                                                                                                                                                                                                                    |              |              |
| <ul style="list-style-type: none"> <li>Power cable, quick start guide</li> <li>R&amp;S®FSVA3030: adapter 3.5 mm (APC3.5-compatible) female/female</li> <li>R&amp;S®FSVA3044: adapter 2.92 mm female/female</li> <li>R&amp;S®FSVA3050: adapter 1.85 mm female/female</li> </ul> |              |              |

## Options

### Hardware <sup>25</sup>

| Designation                       | Type         | Order No.    | Remark                                                                                                                                                                                                                      |
|-----------------------------------|--------------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Side carry handles                | R&S®FSV3-B1  | 1330.5700.02 | user-retrofittable                                                                                                                                                                                                          |
| Audio demodulator                 | R&S®FSV3-B3  | 1330.3765.02 |                                                                                                                                                                                                                             |
| OCXO frequency reference          | R&S®FSV3-B4  | 1330.3794.02 |                                                                                                                                                                                                                             |
| Additional interfaces             | R&S®FSV3-B5  | 1330.3820.02 | GPIB, IF out, video out (2 × BNC), trigger out, AUX port, AUX control                                                                                                                                                       |
| Additional interfaces             | R&S®FSV3-B5E | 1330.3820.03 | IF out, video out (2 × BNC), trigger out, AUX port, AUX control                                                                                                                                                             |
| 10 Gbit/s LAN interface           | R&S®FSV3-B6  | 1330.3913.02 | for fast remote control and fast I/Q data transfer                                                                                                                                                                          |
| Resolution bandwidth up to 40 MHz | R&S®FSV3-B8E | 1346.4337.02 | the signal analysis bandwidth is defined by the R&S®FSV3-B40/-B200/-B400/-B601/-B1001 options, not by the R&S®FSV3-B8E option; user-retrofittable; R&S®FSV3-B11 option is recommended in addition for frequencies > 7.5 GHz |
| External generator control        | R&S®FSV3-B10 | 1330.3859.02 | LAN based, user-retrofittable (license key), R&S®FSV3-B5 is recommended for high sweep speed                                                                                                                                |
| YIG preselector bypass            | R&S®FSV3-B11 | 1330.3865.02 | required for signal analysis at center frequencies > 7.5 GHz with R&S®FSV3-B40/-B200/-B400/-B601/-B1001 options; for R&S®FSVA3013, R&S®FSVA3030, R&S®FSVA3044, R&S®FSVA3050; user-retrofittable (license key)               |

<sup>25</sup> The hardware options can be retrofitted in Rohde & Schwarz service centers unless otherwise noted.

| Designation                                        | Type           | Order No.    | Remark                                                                                                                                                                        |
|----------------------------------------------------|----------------|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 40 MHz analysis bandwidth                          | R&S®FSV3-B40   | 1330.4103.02 | user-retrofittable (license key) <sup>26</sup>                                                                                                                                |
| 200 MHz analysis bandwidth                         | R&S®FSV3-B200  | 1330.4132.02 | R&S®FSV3-B11 option is recommended in addition for signal analysis at frequencies > 7.5 GHz                                                                                   |
| 400 MHz analysis bandwidth                         | R&S®FSV3-B400  | 1330.7154.02 |                                                                                                                                                                               |
| 600 MHz analysis bandwidth                         | R&S®FSV3-B601  | 1346.5762.02 | for R&S®FSVA3004, R&S®FSVA3007                                                                                                                                                |
|                                                    |                | 1346.5762.12 | for R&S®FSVA3013, R&S®FSVA3030, R&S®FSVA3044, R&S®FSVA3050 <sup>26</sup>                                                                                                      |
| 1 GHz analysis bandwidth                           | R&S®FSV3-B1001 | 1346.5779.02 | for R&S®FSVA3004, R&S®FSVA3007                                                                                                                                                |
|                                                    |                | 1346.5779.12 | for R&S®FSVA3013, R&S®FSVA3030, R&S®FSVA3044, R&S®FSVA3050 <sup>26</sup>                                                                                                      |
| Spare solid-state drive                            | R&S®FSV3-B18   | 1330.4003.21 | includes Windows IoT Enterprise LTSC 2021 license; R&S®FSV3-B20 option required; user-retrofittable                                                                           |
| Removable hard drive                               | R&S®FSV3-B20   | 1330.3971.02 | at front panel                                                                                                                                                                |
| LO/IF connections, for external mixers             | R&S®FSV3-B21   | 1330.4010.02 | includes two cables (length: 1 m) for the IF and LO ports; for R&S®FSVA3030, R&S®FSVA3044, R&S®FSVA3050                                                                       |
| RF preamplifier, for R&S®FSVA3004 and R&S®FSVA3007 | R&S®FSV3-B24   | 1330.4049.07 | retrofittable <sup>27</sup>                                                                                                                                                   |
| RF preamplifier, for R&S®FSVA3013                  | R&S®FSV3-B24   | 1330.4049.13 | retrofittable <sup>27</sup>                                                                                                                                                   |
| RF preamplifier, for R&S®FSVA3030                  | R&S®FSV3-B24   | 1330.4049.30 | retrofittable <sup>27</sup>                                                                                                                                                   |
| RF preamplifier, for R&S®FSVA3044                  | R&S®FSV3-B24   | 1330.4049.44 | retrofittable <sup>27</sup>                                                                                                                                                   |
| RF preamplifier, for R&S®FSVA3050                  | R&S®FSV3-B24   | 1330.4049.49 | retrofittable <sup>27</sup>                                                                                                                                                   |
| RF preamplifier, for R&S®FSVA3050                  | R&S®FSV3-B24   | 1330.4049.50 | export license required <sup>27</sup>                                                                                                                                         |
| Electronic attenuator, 1 dB steps                  | R&S®FSV3-B25   | 1330.4078.02 | user-retrofittable (license key)                                                                                                                                              |
| Noise source control via BNC                       | R&S®FSV3-B28V  | 1330.6664.02 |                                                                                                                                                                               |
| Frequency extension 54 GHz                         | R&S®FSV3-B54G  | 1346.6369.02 | R&S®FSV3-B11 required, only for R&S®FSVA3050                                                                                                                                  |
| Enhanced computing power                           | R&S®FSV3-B114  | 1330.4910.04 | mandatory                                                                                                                                                                     |
| Analog baseband inputs, 2 × 200 MHz                | R&S®FSV3-B271  | 1330.4190.02 | R&S®FSV3-B200/-B400/-B601 or -B1001 option required; supports I/Q analyzer mode and R&S®FSV3-K91, R&S®FSV3-K96, R&S®FSV3-K144, R&S®FSV3-K145 options                          |
| Analog baseband inputs, 2 × 200 MHz                | R&S®FSV3-B271  | 1330.4190.03 | not available in combination with R&S®FSV3-B200/-B400/-B601 or -B1001 option; supports I/Q analyzer mode and R&S®FSV3-K91, R&S®FSV3-K96, R&S®FSV3-K144, R&S®FSV3-K145 options |

<sup>26</sup> R&S®FSV3-B11 option is recommended in addition for signal analysis at frequencies > 7.5 GHz.

<sup>27</sup> For retrofitting, please contact your local Rohde & Schwarz sales office.

| Designation                                      | Type          | Order No.    | Remark                                                                                                  |
|--------------------------------------------------|---------------|--------------|---------------------------------------------------------------------------------------------------------|
| 1 GHz reference                                  | R&S®FSV3-K703 | 1330.7502.02 | user-retrofitable (license key)                                                                         |
| Enhanced performance,<br>for R&S®FSVA3004        | R&S®FSV3-B710 | 1346.4950.05 | minimum frequency: 2 Hz,<br>enhanced phase noise and<br>sensitivity specifications;<br>not retrofitable |
| Enhanced performance,<br>for R&S®FSVA3007        | R&S®FSV3-B710 | 1346.4950.08 |                                                                                                         |
| Enhanced performance<br>for R&S®FSVA3013         | R&S®FSV3-B710 | 1346.4950.14 |                                                                                                         |
| Enhanced performance,<br>for R&S®FSVA3030        | R&S®FSV3-B710 | 1346.4950.31 |                                                                                                         |
| Enhanced performance,<br>for R&S®FSVA3044        | R&S®FSV3-B710 | 1346.4950.44 |                                                                                                         |
| Enhanced performance,<br>for R&S®FSVA3050        | R&S®FSV3-B710 | 1346.4950.51 |                                                                                                         |
| Floating license smart card,<br>with USB adapter | R&S®FSV3-FL   | 1345.1957.02 |                                                                                                         |

## Firmware <sup>28</sup>

| Designation                                                                               | Type          | Order No.    | Remark                                                                                                         |
|-------------------------------------------------------------------------------------------|---------------|--------------|----------------------------------------------------------------------------------------------------------------|
| Pulse measurements                                                                        | R&S®FSV3-K6   | 1346.3330.02 |                                                                                                                |
| AM/FM/PM modulation analysis                                                              | R&S®FSV3-K7   | 1330.5022.02 |                                                                                                                |
| Bluetooth® BR/EDR/LE<br>measurements <sup>29</sup>                                        | R&S®FSV3-K8   | 1346.5679.02 |                                                                                                                |
| Bluetooth® 6.0 channel sounding <sup>29</sup>                                             | R&S®FSV3-K8E  | 1346.4389.02 |                                                                                                                |
| Power sensor support                                                                      | R&S®FSV3-K9   | 1346.3676.02 |                                                                                                                |
| GSM/EDGE/EDGE evolution/<br>VAMOS measurements <sup>29</sup>                              | R&S®FSV3-K10  | 1330.5039.02 |                                                                                                                |
| Amplifier measurements                                                                    | R&S®FSV3-K18  | 1346.3347.02 |                                                                                                                |
| Direct DPD measurements                                                                   | R&S®FSV3-K18D | 1346.3353.02 | R&S®FSV3-K18 option required                                                                                   |
| Frequency response and group<br>delay measurements                                        | R&S®FSV3-K18F | 1346.4408.02 | R&S®FSV3-K18 option required                                                                                   |
| Memory-polynomial DPD<br>(digital predistortion)                                          | R&S®FSV3-K18M | 1345.1486.02 | R&S®FSV3-K18 and<br>R&S®FSV3-K18D options<br>required                                                          |
| Noise figure measurements <sup>29</sup>                                                   | R&S®FSV3-K30  | 1330.5045.02 | for legacy noise sources<br>R&S®FSV3-B28V option is<br>required                                                |
| Phase noise measurements <sup>29</sup>                                                    | R&S®FSV3-K40  | 1330.5051.02 |                                                                                                                |
| EMI measurements                                                                          | R&S®FSV3-K54  | 1330.5068.02 |                                                                                                                |
| CISPR calibration,<br>for R&S®FSV3-K54                                                    | R&S®FSV3-K54C | 1346.3624.02 | R&S®FSV3-K54 option required;<br>retrofit requires instrument<br>calibration by the<br>Rohde & Schwarz service |
| Transient measurements                                                                    | R&S®FSV3-K60  | 1346.4350.02 |                                                                                                                |
| Transient chirp measurements                                                              | R&S®FSV3-K60C | 1346.4366.02 | R&S®FSV3-K60 option required                                                                                   |
| Transient hop measurements                                                                | R&S®FSV3-K60H | 1346.4372.02 | R&S®FSV3-K60 option required                                                                                   |
| Transient phase noise<br>measurements                                                     | R&S®FSV3-K60P | 1346.6298.02 | R&S®FSV3-K60 and<br>(R&S®FSV3-K60C or<br>R&S®FSV3-K60H) options<br>required                                    |
| Vector signal analysis <sup>29</sup>                                                      | R&S®FSV3-K70  | 1330.5074.02 |                                                                                                                |
| Multi-modulation analysis <sup>29</sup>                                                   | R&S®FSV3-K70M | 1346.3376.02 | R&S®FSV3-K70 option required                                                                                   |
| BER PRBS measurements <sup>29</sup>                                                       | R&S®FSV3-K70P | 1346.3382.02 | R&S®FSV3-K70 option required                                                                                   |
| 3GPP FDD (WCDMA) base station<br>measurements<br>(incl. HSDPA and HSDPA+) <sup>29</sup>   | R&S®FSV3-K72  | 1330.5080.02 |                                                                                                                |
| 3GPP FDD (WCDMA) mobile station<br>measurements<br>(incl. HSUPA and HSUPA+) <sup>29</sup> | R&S®FSV3-K73  | 1330.5097.02 |                                                                                                                |

<sup>28</sup> For measurements with analysis bandwidths > 28 MHz an appropriate bandwidth option is required.

<sup>29</sup> Also available as floating license. Order number is xxxx.xxxx.51 instead of xxxx.xxxx.02 and R&S®FSV3-FL hardware option is required.

| Designation                                                               | Type           | Order No.    | Remark                                                                                                                         |
|---------------------------------------------------------------------------|----------------|--------------|--------------------------------------------------------------------------------------------------------------------------------|
| WLAN 802.11a/b/g measurements <sup>29</sup>                               | R&S®FSV3-K91   | 1330.5100.02 |                                                                                                                                |
| WLAN 802.11n measurements <sup>29</sup>                                   | R&S®FSV3-K91N  | 1330.5139.02 | R&S®FSV3-K91 option required                                                                                                   |
| WLAN 802.11ac measurements <sup>29</sup>                                  | R&S®FSV3-K91AC | 1330.5116.02 |                                                                                                                                |
| WLAN 802.11ax measurements <sup>29</sup>                                  | R&S®FSV3-K91AX | 1346.3399.02 |                                                                                                                                |
| WLAN 802.11p measurements <sup>29</sup>                                   | R&S®FSV3-K91P  | 1330.5122.02 |                                                                                                                                |
| WLAN 802.11be measurements <sup>29</sup>                                  | R&S®FSV3-K91BE | 1346.4966.02 |                                                                                                                                |
| WLAN 802.11bn measurements <sup>29</sup>                                  | R&S®FSV3-K91BN | 3740.3306.02 |                                                                                                                                |
| OFDM signal analysis                                                      | R&S®FSV3-K96   | 1346.6469.02 |                                                                                                                                |
| EUTRA/LTE FDD base station measurements <sup>29</sup>                     | R&S®FSV3-K100  | 1330.5145.02 |                                                                                                                                |
| EUTRA/LTE FDD UE measurements <sup>29</sup>                               | R&S®FSV3-K101  | 1330.5151.02 |                                                                                                                                |
| EUTRA/LTE base station MIMO measurements <sup>29</sup>                    | R&S®FSV3-K102  | 1330.5168.02 | R&S®FSV3-K100 or R&S®FSV3-K104 option required                                                                                 |
| EUTRA/LTE-Advanced uplink measurements <sup>29</sup>                      | R&S®FSV3-K103  | 1330.7231.02 | R&S®FSV3-K101 or R&S®FSV3-K105 option required                                                                                 |
| EUTRA/LTE TDD base station measurements <sup>29</sup>                     | R&S®FSV3-K104  | 1330.5174.02 |                                                                                                                                |
| EUTRA/LTE TDD uplink measurements <sup>29</sup>                           | R&S®FSV3-K105  | 1330.5180.02 |                                                                                                                                |
| EUTRA/LTE NB-IoT downlink measurements <sup>29</sup>                      | R&S®FSV3-K106  | 1346.3418.02 |                                                                                                                                |
| 5G NR Rel. 15 downlink measurements <sup>29</sup>                         | R&S®FSV3-K144  | 1330.7219.02 |                                                                                                                                |
| 5G NR Rel. 15 uplink measurements <sup>29</sup>                           | R&S®FSV3-K145  | 1330.7225.02 |                                                                                                                                |
| 5G NR combined ACLR/SEM/EVM measurements <sup>29</sup>                    | R&S®FSV3-K147  | 1346.4250.02 | R&S®FSV3-K144 option required                                                                                                  |
| 5G NR combined multicarrier ACLR/SEM/EVM measurements <sup>29</sup>       | R&S®FSV3-K147C | 1346.6498.02 | R&S®FSV3-K147 option required                                                                                                  |
| 5G NR Rel. 16 extension for uplink/downlink measurements <sup>29</sup>    | R&S®FSV3-K148  | 1346.4914.02 | R&S®FSV3-K144 or R&S®FSV3-K145 option required                                                                                 |
| 5G NR Rel. 17/18 extension for uplink/downlink measurements <sup>29</sup> | R&S®FSV3-K171  | 1346.5362.02 | R&S®FSV3-K144 option or R&S®FSV3-K145 and R&S®FSV3-K148 options required                                                       |
| O-RAN measurements <sup>29</sup>                                          | R&S®FSV3-K175  | 1346.6452.02 |                                                                                                                                |
| Beyond 5G measurements <sup>29</sup>                                      | R&S®FSV3-K184  | 1346.6500.02 | R&S®FSV3-K144 or R&S®FSV3-K145 option required                                                                                 |
| 200 MHz real-time spectrum measurements <sup>29</sup>                     | R&S®FSV3-K200R | 1346.6552.02 | R&S®FSV3-B114 option model .03 or higher required; the maximum real-time bandwidth (span) is limited by the analysis bandwidth |
| User defined frequency correction by SnP file <sup>29</sup>               | R&S®FSV3-K544  | 1346.3630.02 | corrects frequency response (amplitude and phase) of measurement setup                                                         |
| External frontend control                                                 | R&S®FSV3-K553  | 1346.4889.02 |                                                                                                                                |
| I/Q noise cancellation                                                    | R&S®FSV3-K575  | 1346.6769.02 | supports I/Q analyzer mode and R&S®FSV3-K91, R&S®FSV3-K144, R&S®FSV3-K145 options                                              |
| Health and utilization monitoring service (HUMS)                          | R&S®FSV3-K980  | 1346.4943.02 |                                                                                                                                |
| Local VSE enabler                                                         | R&S®FSV3-VSE   | 1345.2247.02 |                                                                                                                                |

**PC software**

| Designation                                  | Type        | Order No.    |
|----------------------------------------------|-------------|--------------|
| R&S®VSE basic edition <sup>30, 31, 32</sup>  | R&S®VSE     | 1345.1011.06 |
| R&S®VSE enterprise edition <sup>32, 33</sup> | R&S®VSE     | 1345.1105.06 |
| <b>License dongles</b>                       |             |              |
| License dongle                               | R&S®FSPC    | 1310.0002.03 |
| Floating license dongle                      | R&S®FSPC-FL | 1310.0002.04 |
| <b>Service option</b>                        |             |              |
| R&S®VSE software maintenance                 | R&S®VSE-SWM | 1320.7622.81 |

For further information on the R&S®VSE vector signal explorer software, see specifications (PD 3607.1371.22) and product brochure (PD 3607.1371.12).

**Instrument security**

| Designation                                    | Type         | Order No.    | Remark                                                                         |
|------------------------------------------------|--------------|--------------|--------------------------------------------------------------------------------|
| USB mass memory write protection               | R&S®FSV3-B33 | 1330.4861.02 | preinstallation ex-factory, for later retrofit see instrument security manuals |
| Security write protection of solid-state drive | R&S®FSV3-K33 | 1346.3360.02 |                                                                                |

---

<sup>30</sup> R&S®FSPC required.

<sup>31</sup> Not available for R&S®FSPC-FL.

<sup>32</sup> To obtain the floating license of the product, R&S®FSPC-FL is needed and order number xxxx.xxxx.51 must be used instead of xxxx.xxxx.06.

<sup>33</sup> R&S®FSPC or R&S®FSPC-FL required.

## Upgrades

| Designation                                                 | Type           | Order No.    | Remark                                                                                                                             |
|-------------------------------------------------------------|----------------|--------------|------------------------------------------------------------------------------------------------------------------------------------|
| 200 MHz to 400 MHz analysis bandwidth upgrade               | R&S®FSV3-U400  | 1330.7183.02 | R&S®FSV3-B200 option required, user-retrofittable (license key), recalibration by the Rohde & Schwarz service is recommended       |
| 600 MHz to 1 GHz analysis bandwidth upgrade                 | R&S®FSV3-U1006 | 1346.5027.02 | R&S®FSV3-B600/-B601 option required, user-retrofittable (license key), recalibration by the Rohde & Schwarz service is recommended |
| R&S®FSV3-B601 upgrade                                       | R&S®FSV3-U601  | 1346.6675.02 | for R&S®FSVA3004 and R&S®FSVA3007                                                                                                  |
|                                                             |                | 1346.6675.12 | R&S®FSV3-B11 recommended; for R&S®FSVA3013, R&S®FSVA3030, R&S®FSVA3044, R&S®FSVA3050                                               |
| R&S®FSV3-B1001 upgrade                                      | R&S®FSV3-U1001 | 1346.6681.02 | for R&S®FSVA3004 and R&S®FSVA3007                                                                                                  |
|                                                             |                | 1346.6681.12 | R&S®FSV3-B11 recommended; for R&S®FSVA3013, R&S®FSVA3030, R&S®FSVA3044, R&S®FSVA3050                                               |
| R&S®FSV3-B600 to B601 upgrade                               | R&S®FSV3-U601  | 1346.6675.13 | for R&S®FSVA3013, R&S®FSVA3030, R&S®FSVA3044, R&S®FSVA3050 (installed R&S®FSV3-B600 option required)                               |
| R&S®FSV3-B1000 to B1001 upgrade                             | R&S®FSV3-U1001 | 1346.6681.13 | for R&S®FSVA3013, R&S®FSVA3030, R&S®FSVA3044, R&S®FSVA3050 (installed R&S®FSV3-B1000 option required)                              |
| LO/IF connections for external mixers upgrade <sup>34</sup> | R&S®FSV3-U21   | 1356.3291.xy |                                                                                                                                    |
| RF preamplifier 7.5 GHz upgrade <sup>34</sup>               | R&S®FSV3-U24C  | 1346.6581.07 |                                                                                                                                    |
| RF preamplifier 13.6 GHz upgrade <sup>34</sup>              | R&S®FSV3-U24C  | 1346.6581.13 |                                                                                                                                    |
| RF preamplifier 30 GHz upgrade <sup>34</sup>                | R&S®FSV3-U24C  | 1346.6581.30 |                                                                                                                                    |
| RF preamplifier 44 GHz upgrade <sup>34</sup>                | R&S®FSV3-U24C  | 1346.6581.44 |                                                                                                                                    |
| RF preamplifier 50 GHz upgrade <sup>34</sup>                | R&S®FSV3-U24C  | 1346.6581.49 |                                                                                                                                    |
| RF preamplifier 50 GHz upgrade <sup>34</sup>                | R&S®FSV3-U24C  | 1346.6581.50 | export license required                                                                                                            |
| RF preamplifier 13.6 GHz upgrade <sup>34</sup>              | R&S®FSV3-U24N  | 1346.6575.13 |                                                                                                                                    |
| RF preamplifier 30 GHz upgrade <sup>34</sup>                | R&S®FSV3-U24N  | 1346.6575.30 |                                                                                                                                    |
| RF preamplifier 44 GHz upgrade <sup>34</sup>                | R&S®FSV3-U24N  | 1346.6575.44 |                                                                                                                                    |
| RF preamplifier 50 GHz upgrade <sup>34</sup>                | R&S®FSV3-U24N  | 1346.6575.49 |                                                                                                                                    |
| RF preamplifier 50 GHz upgrade <sup>34</sup>                | R&S®FSV3-U24N  | 1346.6575.50 | export license required                                                                                                            |
| Upgrade to Windows IoT Enterprise LTSC 2021 <sup>34</sup>   | R&S®FSV3-U10   | 1346.6698.21 |                                                                                                                                    |

<sup>34</sup> For retrofitting, contact your local Rohde & Schwarz sales office.

## Recommended extras

| Designation                                                                                                                                                                                                                                    | Type                            | Order No.                                                                                                          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|--------------------------------------------------------------------------------------------------------------------|
| Headphones                                                                                                                                                                                                                                     |                                 | 0708.9010.00                                                                                                       |
| IEC/IEEE bus cable, length: 1 m                                                                                                                                                                                                                | R&S®PCK                         | 0292.2013.10                                                                                                       |
| IEC/IEEE bus cable, length: 2 m                                                                                                                                                                                                                | R&S®PCK                         | 0292.2013.20                                                                                                       |
| 19" rack adapter, 4 HU, 1/1, dark blue                                                                                                                                                                                                         | R&S®ZZA-KN4B                    | 1703.1346.00                                                                                                       |
| <b>Noise sources</b>                                                                                                                                                                                                                           |                                 |                                                                                                                    |
| Smart noise sources, for noise figure and gain measurements up to 110 GHz (R&S®FSV3-K30 required)                                                                                                                                              | R&S®FS-SNS18/26/40/55/67/90/110 | 1338.8008.18,<br>1338.8008.26,<br>1338.8008.40,<br>1338.8008.55,<br>1338.8008.67,<br>1338.8008.90,<br>1338.8008.11 |
| <b>Matching pads, 50/75 Ω</b>                                                                                                                                                                                                                  |                                 |                                                                                                                    |
| L section, matching at both ends                                                                                                                                                                                                               | R&S®RAM                         | 0358.5414.02                                                                                                       |
| Series resistor, 25 Ω, matching at one end<br>(taken into account in instrument function RF INPUT 75 Ω)                                                                                                                                        | R&S®RAZ                         | 0358.5714.02                                                                                                       |
| <b>High-power attenuators</b>                                                                                                                                                                                                                  |                                 |                                                                                                                    |
| 1000 W, 40 dB, 400 (1000) MHz                                                                                                                                                                                                                  | R&S®RBS1000                     | 0207.4010.55                                                                                                       |
| 100 W, 3/6/10/20/30 dB, 2 GHz                                                                                                                                                                                                                  | R&S®RBU100                      | 1073.8495.03,<br>1073.8495.06,<br>1073.8495.10,<br>1073.8495.20,<br>1073.8495.30                                   |
| 50 W, 3/6/10/20/30 dB, 2 GHz                                                                                                                                                                                                                   | R&S®RBU50                       | 1073.8695.03,<br>1073.8695.06,<br>1073.8695.10,<br>1073.8695.20,<br>1073.8695.30                                   |
| 50 W, 20 dB, 6 GHz                                                                                                                                                                                                                             | R&S®RDL50                       | 1035.1700.52                                                                                                       |
| <b>RF adapters and cables</b>                                                                                                                                                                                                                  |                                 |                                                                                                                    |
| Coaxial adapter, 1.85 mm (f) to 1.85 mm (f)                                                                                                                                                                                                    |                                 | 3588.9654.00                                                                                                       |
| Coaxial adapter, 1.85 mm (f) to 2.92 mm (f)                                                                                                                                                                                                    |                                 | 3628.4728.02                                                                                                       |
| Coaxial adapter, 2.92 mm (f) to 2.92 mm (f)                                                                                                                                                                                                    |                                 | 3588.8664.00                                                                                                       |
| Coaxial adapter, 3.5 mm (f) to 3.5 mm (f), APC3.5-compatible                                                                                                                                                                                   |                                 | 3689.9442.00                                                                                                       |
| Coaxial adapter, 3.5 mm (m) to 3.5 mm (m), APC3.5-compatible                                                                                                                                                                                   |                                 | 3587.7770.00                                                                                                       |
| Coaxial adapter, type N (f) to 3.5 mm (m), APC3.5-compatible                                                                                                                                                                                   |                                 | 3587.7806.00                                                                                                       |
| Coaxial adapter, type N (f) to 3.5 mm (f), APC3.5-compatible                                                                                                                                                                                   |                                 | 3587.7829.00                                                                                                       |
| Coaxial cable, SMA (m) to SMA (m), length: 1 m                                                                                                                                                                                                 |                                 | 3586.9970.00                                                                                                       |
| <b>Connectors and cables</b>                                                                                                                                                                                                                   |                                 |                                                                                                                    |
| Probe power connector, 3-pin                                                                                                                                                                                                                   |                                 | 1065.9480.00                                                                                                       |
| Type N adapter, for R&S®RT-Zxx oscilloscope probes<br>(for R&S®FSVA3004/3007/3013)                                                                                                                                                             | R&S®RT-ZA9                      | 1417.0909.02                                                                                                       |
| Type 3.5mm (f) adapter, for R&S®RT-Zxx oscilloscope probes<br>(for R&S®FSVA3030 and R&S®FSVA3044).<br>Not suitable for R&S®FSVA3050.<br>Hint: access to "Trigger 1 in/out" and "Noise source control and power sensor" ports might be limited. | R&S®RT-ZA51                     | 1803.5365.02                                                                                                       |
| Cable, for connecting high speed digital baseband interfaces of Rohde & Schwarz instruments                                                                                                                                                    | R&S®DIGIQ-HS                    | 3641.2948.03                                                                                                       |
| D-Sub BNC cable, 9 pole                                                                                                                                                                                                                        |                                 | 1103.9735.00                                                                                                       |
| D-Sub cable, 2 × 9 pole                                                                                                                                                                                                                        |                                 | 1103.9729.00                                                                                                       |
| <b>DC block</b>                                                                                                                                                                                                                                |                                 |                                                                                                                    |
| DC block, 10 kHz to 18 GHz (type N)                                                                                                                                                                                                            | R&S®FSE-Z4                      | 1084.7443.03                                                                                                       |
| <b>External harmonic mixers (for R&amp;S®FSVA3030, R&amp;S®FSVA3044 and R&amp;S®FSVA3050 with R&amp;S®FSV3-B21 option)</b>                                                                                                                     |                                 |                                                                                                                    |
| Harmonic mixer, 40 GHz to 60 GHz                                                                                                                                                                                                               | RPG FS-Z60 <sup>35</sup>        | 1048.0171.02                                                                                                       |
| Harmonic mixer, 50 GHz to 75 GHz                                                                                                                                                                                                               | RPG FS-Z75 <sup>35</sup>        | 3638.2240.02                                                                                                       |
| Harmonic mixer, 60 GHz to 90 GHz                                                                                                                                                                                                               | RPG FS-Z90 <sup>35</sup>        | 3638.2270.02                                                                                                       |
| Harmonic mixer, 75 GHz to 110 GHz                                                                                                                                                                                                              | RPG FS-Z110 <sup>35</sup>       | 3638.2292.02                                                                                                       |
| Harmonic mixer, 90 GHz to 140 GHz                                                                                                                                                                                                              | RPG FS-Z140 <sup>35</sup>       | 3622.0708.02                                                                                                       |
| Harmonic mixer, 110 GHz to 170 GHz                                                                                                                                                                                                             | RPG FS-Z170 <sup>35</sup>       | 3622.0714.02                                                                                                       |
| Harmonic mixer, 140 GHz to 220 GHz                                                                                                                                                                                                             | RPG FS-Z220 <sup>35</sup>       | 3593.3250.02                                                                                                       |
| Harmonic mixer, 220 GHz to 325 GHz                                                                                                                                                                                                             | RPG FS-Z325 <sup>35</sup>       | 3593.3267.02                                                                                                       |

<sup>35</sup> RPG is the abbreviation of Radiometer Physics GmbH, a Rohde & Schwarz company.



| Designation                                                                                           | Type       | Order No.    |
|-------------------------------------------------------------------------------------------------------|------------|--------------|
| <b>Waveguide to coaxial adapters</b>                                                                  |            |              |
| Waveguide to coaxial adapter, WR10 to 1 mm (f)                                                        | WCA110     | 3626.1067.02 |
| Waveguide to coaxial adapter, WR10 to 1 mm (m)                                                        | WCA110     | 3626.1067.03 |
| Waveguide to coaxial adapter, WR12 to 1 mm (m)                                                        | WCA90      | 3626.1050.03 |
| Waveguide to coaxial adapter, WR15 to 1 mm (f)                                                        | WCA75      | 3626.1044.02 |
| Waveguide to coaxial adapter, WR15 to 1 mm (m)                                                        | WCA75      | 3626.1044.03 |
| Waveguide to coaxial adapter, WR12 to 1 mm (f)                                                        | WCA90      | 3626.1050.02 |
| <b>Horn antennas</b>                                                                                  |            |              |
| Horn antenna, 26 GHz to 40 GHz                                                                        | FH-SG-40   | 3629.2393.02 |
| Horn antenna, 50 GHz to 75 GHz                                                                        | FH-SG-75   | 3629.2458.02 |
| Horn antenna, 60 GHz to 90 GHz                                                                        | FH-SG-90   | 3629.2464.02 |
| Horn antenna, 110 GHz to 170 GHz                                                                      | FH-SG-170  | 3629.2493.02 |
| <b>Tools</b>                                                                                          |            |              |
| Torque wrench, for type N connectors,<br>1.5 Nm coupling torque (for R&S®FSVA3004/3007/3013)          | R&S®ZN-ZTW | 1328.8534.71 |
| Torque wrench, for 3.5/2.92/2.4/1.85 mm connectors,<br>0.9 Nm coupling torque (for R&S®FSVA3030/3044) | R&S®ZN-ZTW | 1328.8534.35 |

## Power sensors supported by the R&S®FSV3-K9 option <sup>36</sup>

| Designation                                      | Type          | Order No.    |
|--------------------------------------------------|---------------|--------------|
| <b>Universal power sensors</b>                   |               |              |
| 10 MHz to 8 GHz, 100 mW, two-path                | R&S®NRP-Z211  | 1417.0409.02 |
| 10 MHz to 8 GHz, 200 mW <sup>37</sup>            | R&S®NRP-Z11   | 1138.3004.02 |
| 10 MHz to 18 GHz, 100 mW, two-path <sup>37</sup> | R&S®NRP-Z221  | 1417.0309.02 |
| 10 MHz to 18 GHz, 200 mW <sup>37</sup>           | R&S®NRP-Z21   | 1137.6000.02 |
| 10 MHz to 18 GHz, 2 W <sup>37</sup>              | R&S®NRP-Z22   | 1137.7506.02 |
| 10 MHz to 18 GHz, 15 W <sup>37</sup>             | R&S®NRP-Z23   | 1137.8002.02 |
| 10 MHz to 18 GHz, 30 W <sup>37</sup>             | R&S®NRP-Z24   | 1137.8502.02 |
| <b>Power sensor modules with power splitter</b>  |               |              |
| DC to 18 GHz, 500 mW                             | R&S®NRP-Z27   | 1169.4102.02 |
| DC to 26.5 GHz, 500 mW                           | R&S®NRP-Z37   | 1169.3206.02 |
| <b>Thermal power sensors <sup>38</sup></b>       |               |              |
| 0 Hz to 18 GHz, 100 mW                           | R&S®NRP18T    | 1424.6115.02 |
| 0 Hz to 18 GHz, 100 mW, LAN version              | R&S®NRP18TN   | 1424.6121.02 |
| 0 Hz to 33 GHz, 100 mW                           | R&S®NRP33T    | 1424.6138.02 |
| 0 Hz to 33 GHz, 100 mW, LAN version              | R&S®NRP33TN   | 1424.6144.02 |
| 0 Hz to 40 GHz, 100 mW                           | R&S®NRP40T    | 1424.6150.02 |
| 0 Hz to 40 GHz, 100 mW, LAN version              | R&S®NRP40TN   | 1424.6167.02 |
| 0 Hz to 50 GHz, 100 mW                           | R&S®NRP50T    | 1424.6173.02 |
| 0 Hz to 50 GHz, 100 mW, LAN version              | R&S®NRP50TN   | 1424.6180.02 |
| 0 Hz to 67 GHz, 100 mW                           | R&S®NRP67T    | 1424.6196.02 |
| 0 Hz to 67 GHz, 100 mW, LAN version              | R&S®NRP67TN   | 1424.6209.02 |
| 0 Hz to 90 GHz, 100 mW                           | R&S®NRP90T    | 1424.6473.02 |
| 0 Hz to 90 GHz, 100 mW, LAN version              | R&S®NRP90TN   | 1424.6480.02 |
| 0 Hz to 110 GHz, 100 mW                          | R&S®NRP110T   | 1424.6215.02 |
| <b>Thermal waveguide power sensors</b>           |               |              |
| 50 GHz to 75 GHz, 100 mW                         | R&S®NRP75TWG  | 1700.2529.02 |
| 60 GHz to 90 GHz, 100 mW                         | R&S®NRP90TWG  | 1700.2312.02 |
| 75 GHz to 110 GHz, 100 mW                        | R&S®NRP110TWG | 1173.8709.02 |
| <b>Average power sensors <sup>38</sup></b>       |               |              |
| 8 kHz to 6 GHz, 200 mW                           | R&S®NRP6A     | 1424.6796.02 |
| 8 kHz to 6 GHz, 200 mW, LAN version              | R&S®NRP6AN    | 1424.6809.02 |
| 9 kHz to 6 GHz, 200 mW <sup>37</sup>             | R&S®NRP-Z91   | 1168.8004.02 |
| 8 kHz to 18 GHz, 200 mW                          | R&S®NRP18A    | 1424.6815.02 |
| 8 kHz to 18 GHz, 200 mW, LAN version             | R&S®NRP18AN   | 1424.6821.02 |

<sup>36</sup> For average power measurement only.

<sup>37</sup> Product discontinued.

<sup>38</sup> In addition to RF power measurements the R&S®NRP-Z8x, R&S®NRPxxT/TN, R&S®NRPxxA/AN and R&S®NRPxxS/SN power sensors can be used as wideband RF power trigger sources.

| Designation                                                     | Type          | Order No.    |
|-----------------------------------------------------------------|---------------|--------------|
| <b>Three path diode power sensors</b> <sup>38</sup>             |               |              |
| 100 pW to 200 mW, 10 MHz to 8 GHz                               | R&S®NRP8S     | 1419.0006.02 |
| 100 pW to 200 mW, 10 MHz to 8 GHz, LAN version                  | R&S®NRP8SN    | 1419.0012.02 |
| 100 pW to 200 mW, 10 MHz to 18 GHz                              | R&S®NRP18S    | 1419.0029.02 |
| 100 pW to 200 mW, 10 MHz to 18 GHz, LAN version                 | R&S®NRP18SN   | 1419.0035.02 |
| 1 nW to 2 W, 10 MHz to 18 GHz                                   | R&S®NRP18S-10 | 1424.6721.02 |
| 10 nW to 15 W, 10 MHz to 18 GHz                                 | R&S®NRP18S-20 | 1424.6738.02 |
| 30 nW to 30 W, 10 MHz to 18 GHz                                 | R&S®NRP18S-25 | 1424.6744.02 |
| 100 pW to 200 mW, 10 MHz to 33 GHz                              | R&S®NRP33S    | 1419.0064.02 |
| 100 pW to 200 mW, 10 MHz to 33 GHz, LAN version                 | R&S®NRP33SN   | 1419.0070.02 |
| 100 pW to 200 mW, 10 MHz to 33 GHz, LAN version, TVAC-compliant | R&S®NRP33SN-V | 1419.0129.02 |
| 100 pW to 100 mW, 50 MHz to 40 GHz                              | R&S®NRP40S    | 1419.0041.02 |
| 100 pW to 100 mW, 50 MHz to 40 GHz, LAN version                 | R&S®NRP40SN   | 1419.0058.02 |
| 100 pW to 100 mW, 50 MHz to 50 GHz                              | R&S®NRP50S    | 1419.0087.02 |
| 100 pW to 100 mW, 50 MHz to 50 GHz, LAN version                 | R&S®NRP50SN   | 1419.0093.02 |
| 100 pW to 100 mW, 50 MHz to 67 GHz                              | R&S®NRP67S    | 1424.6396.02 |
| 100 pW to 100 mW, 50 MHz to 67 GHz, LAN version                 | R&S®NRP67SN   | 1424.6409.02 |
| 100 pW to 200 mW, 50 MHz to 67 GHz, LAN version, TVAC-compliant | R&S®NRP67SN-V | 1424.6415.02 |
| 100 pW to 100 mW, 50 MHz to 90 GHz                              | R&S®NRP90S    | 1424.6421.02 |
| 100 pW to 100 mW, 50 MHz to 90 GHz, LAN version                 | R&S®NRP90SN   | 1424.6421.03 |
| <b>Wideband power sensors</b> <sup>38</sup>                     |               |              |
| 50 MHz to 40 GHz, 100 mW (2.92 mm) <sup>37</sup>                | R&S®NRP-Z41   | 1171.8801.02 |
| 50 MHz to 18 GHz, 100 mW                                        | R&S®NRP-Z81   | 1137.9009.02 |
| 50 MHz to 40 GHz, 100 mW (2.92 mm)                              | R&S®NRP-Z85   | 1411.7501.02 |
| 50 MHz to 40 GHz, 100 mW (2.40 mm)                              | R&S®NRP-Z86   | 1417.0109.40 |
| 50 MHz to 44 GHz, 100 mW (2.40 mm)                              | R&S®NRP-Z86   | 1417.0109.44 |

## Probes supported by R&S®FSV3-B271 option

| Designation                                                                                                                                                                    | Type         | Order No.    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------|
| 1.0 GHz, active, 1 MΩ, 0.8 pF                                                                                                                                                  | R&S®RT-ZS10E | 1418.7007.02 |
| 1.0 GHz, active, 1 MΩ, 0.8 pF, micro button                                                                                                                                    | R&S®RT-ZS10  | 1410.4080.02 |
| 1.5 GHz, active, 1 MΩ, 0.8 pF, micro button                                                                                                                                    | R&S®RT-ZS20  | 1410.3502.02 |
| 3.0 GHz, active, 1 MΩ, 0.8 pF, micro button                                                                                                                                    | R&S®RT-ZS30  | 1410.4309.02 |
| 6.0 GHz, active, 1 MΩ, 0.3 pF, micro button                                                                                                                                    | R&S®RT-ZS60  | 1418.7307.02 |
| 1.0 GHz, active, differential, 1 MΩ, 0.6 pF, micro button                                                                                                                      | R&S®RT-ZD10  | 1410.4715.02 |
| 1.5 GHz, active, differential, 1 MΩ, 0.6 pF, micro button                                                                                                                      | R&S®RT-ZD20  | 1410.4409.02 |
| 3.0 GHz, active, differential, 1 MΩ, 0.6 pF, micro button                                                                                                                      | R&S®RT-ZD30  | 1410.4609.02 |
| 4.5 GHz, active, differential, 1 MΩ, 0.4 pF, micro button                                                                                                                      | R&S®RT-ZD40  | 1410.5205.02 |
| 1.5 GHz modular probe amplifier, multimode for differential, single-ended and common mode, 1.2 m cable, 400 kΩ differential, 200 kΩ single ended, R&S®ProbeMeter, micro button | R&S®RT-ZM15  | 1800.4700.02 |
| 3 GHz modular probe amplifier, multimode for differential, single-ended and common mode, 1.2 m cable, 400 kΩ differential, 200 kΩ single ended, R&S®ProbeMeter, micro button   | R&S®RT-ZM30  | 1419.3005.02 |
| 6 GHz modular probe amplifier, multimode for differential, single-ended and common mode, 1.2 m cable, 400 kΩ differential, 200 kΩ single ended, R&S®ProbeMeter, micro button   | R&S®RT-ZM60  | 1419.3105.02 |
| 9 GHz modular probe amplifier, multimode for differential, single-ended and common mode, 1.2 m cable, 400 kΩ differential, 200 kΩ single-ended, R&S®ProbeMeter, micro button   | R&S®RT-ZM90  | 1419.3205.02 |
| 13 GHz modular probe amplifier, multimode for differential, single-ended and common mode, 1.2 m cable, 400 kΩ differential, 200 kΩ single-ended, R&S®ProbeMeter, micro button  | R&S®RT-ZM130 | 1800.4500.02 |
| 16 GHz modular probe amplifier, multimode for differential, single-ended and common mode, 1.2 m cable, 400 kΩ differential, 200 kΩ single-ended, R&S®ProbeMeter, micro button  | R&S®RT-ZM160 | 1800.4600.02 |

| <b>Extras for modular probes</b>                                                                                     |              |              |
|----------------------------------------------------------------------------------------------------------------------|--------------|--------------|
| Tip cable, solder in, extended temperature, length: 15 cm, multimode compatible                                      | R&S®RT-ZMA11 | 1419.4318.02 |
| Tip cable, square pin, for 1.27 mm pin header, length: 15 cm, multimode compatible                                   | R&S®RT-ZMA12 | 1419.4324.02 |
| Tip cable, quick connect, for solder in resistor connection, length: 15 cm, multimode compatible                     | R&S®RT-ZMA15 | 1419.4224.02 |
| Browser module, variable span from 0.5 mm to 8 mm, spring-loaded, incl. spring loaded resistor tips (2 pairs)        | R&S®RT-ZMA30 | 1419.4353.02 |
| SMA module, 2.92 mm/3.5 mm/SMA, differential, 100 Ω, DC termination, multimode compatible; incl. lead 11 cm (4.3 in) | R&S®RT-ZMA40 | 1419.4201.02 |
| Extended temperature kit, 1 m matched cable pair, multimode compatible, incl. R&S®RT-ZMA11                           | R&S®RT-ZMA50 | 1419.4218.02 |

## External frontends supported by R&S®FSV3-K553 option

| <b>Designation</b>                      | <b>Type</b> | <b>Order No.</b> |
|-----------------------------------------|-------------|------------------|
| External frontend from 24 GHz to 44 GHz | R&S®FE44S   | 1338.7001.02     |
| External frontend from 36 GHz to 50 GHz | R&S®FE50DTR | 1347.4099.02     |

## Warranty and service

| <b>Warranty</b>                                                |                                |                       |
|----------------------------------------------------------------|--------------------------------|-----------------------|
| Base unit                                                      |                                | 1 year                |
| All other items                                                |                                | 1 year                |
| <b>Service options</b>                                         |                                |                       |
|                                                                | <b>Service plans</b>           | <b>On demand</b>      |
| Calibration                                                    | up to five years <sup>39</sup> | pay per calibration   |
| Warranty and repair                                            | up to five years <sup>39</sup> | standard price repair |
| Contact your Rohde & Schwarz sales office for further details. |                                |                       |

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and other countries.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Rohde & Schwarz is under license.

<sup>39</sup> For extended periods, contact your Rohde & Schwarz sales office.

**Service at Rohde & Schwarz**  
**You're in great hands**

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

The dataTec logo features the word "data" in a white, lowercase, sans-serif font and "Tec" in a white, italicized, sans-serif font, both set against a solid red rectangular background.

Mess- und Prüftechnik. Die Experten.

**Ihr Ansprechpartner /**  
**Your Partner:**

**dataTec AG**

E-Mail: [info@datatec.eu](mailto:info@datatec.eu)

>>> [www.datatec.eu](http://www.datatec.eu)

**Rohde & Schwarz**

The Rohde & Schwarz technology group is among the trailblazers when it comes to paving the way for a safer and connected world with its leading solutions in test & measurement, technology systems and networks & cybersecurity. Founded more than 90 years ago, the group is a reliable partner for industry and government customers around the globe. The independent company is headquartered in Munich, Germany and has an extensive sales and service network with locations in more than 70 countries.

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

**Sustainable product design**

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management  
**ISO 9001**

Certified Environmental Management  
**ISO 14001**

**More certificates of Rohde & Schwarz**



**Rohde & Schwarz training**

[www.training.rohde-schwarz.com](http://www.training.rohde-schwarz.com)

**Rohde & Schwarz customer support**

[www.rohde-schwarz.com/support](http://www.rohde-schwarz.com/support)

