

CNT-102

Multi-channel Frequency Analyzer

DATA SHEET

pendulum

dataTec

Mess- und Prüftechnik. Die Experten.


Ihr Ansprechpartner /
Your Partner:

dataTec AG

E-Mail: info@datatec.eu

>>> www.datatec.eu

- Two channel 400 MHz Frequency Analyzer - plus optional RF-channel up to 24 GHz
- NEW measurement modes:
2 parallel counters in one box
- Gap-free zero-dead-time frequency/period/TIE measurements
- Very-high resolution:
Time: 14 ps
Freq.: 12-13 digits/s
- Very high meas. speed:
1M meas./s to internal memory
- Fast bus speed;
170k meas/s in block mode
- Graphic touch screen display for settings and display of values, statistics (numeric and distribution graph), trend & modulation domain
- The instrument can be controlled locally via touch screen or mouse, or remotely (from anywhere in the world) - via web interface or VNC
- Intelligent and easy-to-use
- Affordable

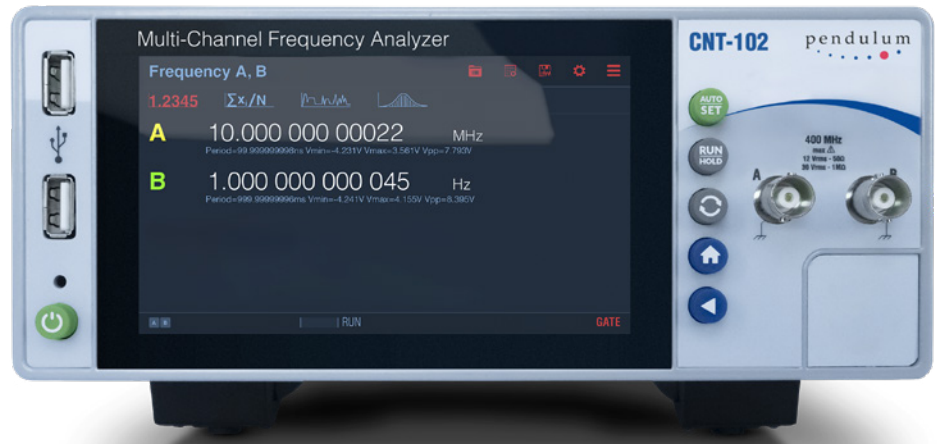

The Pendulum CNT-102 is a **new** affordable model in the CNT-100 family for super-performance **multi-channel** frequency and time-interval analysis in a bench-top unit. You can track parallel frequency, phase or time simultaneously on 2 input channels on the large graphic screen. These instruments feature gap-free measurements, and have 14 ps time resolution, up to 13 digits/s frequency resolution, and a measuring speed of 1M results/s.

CNT-102 outperforms any competing Timer/Counter/Analyzer on the market.

For even higher performance, please check our CNT-104S, a 4-input Multi-channel Frequency Analyzer with 7ps resolution and a speed of up to 20MSa/s.

Highest Performance for R&D and metrology

- The very-high single-shot resolution gives better insights in the design under test, faster results in phase comparisons between clocks, more accurate calibration, and allows capture of very small time/phase changes. Track and compare two signals in parallel with 14 ps resolution/timestamp, with 1 μ s between samples in each channel.
- Gap-free, zero-dead-time counting provides back-to-back measurements without losing any cycle, even for very long measurements.
- The CNT-102 is also a high-performance Modulation Domain Analyzer (MDA). Thanks to the high measurement speed of up to one million samples/s, on 2 parallel input signals, very fast frequency or phase/time changes can be captured in real time.
- CNT-102 has a unique parallel and independent 2-channel design, plus an optional RF input. Both 400 MHz channels perform parallel, independent, and gap-free time-stamping of the input signals. This allows for new measurements that earlier required many instruments, like phase comparison of 2 atomic clocks to a common reference, without the need for a switch. Or comparing frequency or any pulse parameter simultaneously in two different test points, without moving any test cable or probe.

Save money in production test

- The 2-channel design enables 2 simultaneous frequency measurements in parallel. **One CNT-102 can replace two existing frequency counters** in a test system at a lower cost/counter.
- Using the option 22/05 rackmount adapter, you will have 4 parallel frequency counters in a 19", 2U high rack space.
- Choose between Ethernet, WLAN*, or USB** as a communication interface to a PC/Laptop/Tablet, or to the test system controller.
- High bus speed reduces test time in ATE test systems. Perform fast block measurements up to 170k meas/s. Test time is reduced compared to existing solutions, and time is money.

* Requires an external USB Wi-Fi dongle

** Later availability via free SW upgrade

Easy-to-understand Graphical Presentation

One of the great features of the CNT-102 is the graphic display with its menu oriented settings. The non-expert can easily make correct settings, thanks to the guided instruction on most setting pages.

Valuable signal information, given in multi-parameter displays, removes the need for other instruments like DVM's and Scopes for quick signal verification.

Measured values are presented as both numerics and graphics. The graphical presentation of results (distribution, trends etc.) gives a better understanding of the nature of jitter. It also provides you with a much better view of changes vs time, from slow drift to fast modulation. The same data set can be viewed in Numerical, Statistics, Distribution and Time-line views. It is very easy to capture and toggle between views of the same data set.



Compare 2 signals simultaneously on screen, with statistics parameters below. 2 instruments in one!

Modulation Domain Analysis

The CNT-102 features built-in modulation domain analysis, displaying frequency changes vs. time, on one or two input channels.

Thanks to the high resolution, and the high measurement speed of down to 1 μ s between individual samples in each channel, you can follow and verify for example:

- FM, FSK, BPSK, PWM, PPM and other time, phase or frequency modulation schemes
- Frequency sweep
- Frequency transients
- Frequency settling in oscillators, VCOs and PLLs
- Synthesizer switching
- Frequency instability, incl. jitter
- Frequency hopping agile communication



View fast FM, or any time/phase/frequency modulation, on screen, on one or two channels. Here we see FM modulation with both sine and square wave shape

Full flexibility for remote control

The CNT-102 comes as standard with a Gbit Ethernet interface for remote control and data transfer.

Using a Wi-Fi dongle in the front panel USB port, enables you to connect CNT-102 to your local wireless network.

A USB 2.0 data communication interface is also available.

You can access and control the instrument from your lab bench, or from anywhere in the world, using the integrated web interface function.

Very flexible configuration

The CNT-102 can be configured as you like it to fit performance demands and/or budget.

- Add an optional extra channel C for RF frequency measurements. Choose either a 3 GHz, or 10 GHz, basic HW (the 10 GHz channel is SW key upgradable to 15, 20, or 24 GHz)
- Choose between 3 timebase oscillator options; the standard TCXO and 2x OCXO
- Add an optional 0.5 Hz to 100 MHz pulse generator (SW license key)
- Add optional TIE measurement function (SW license key)

Outstanding ease-of-use

The big color touch screen with its intuitive menus lets you make your settings via a simple finger touch. Alternatively you can connect a wireless mouse to the front USB host port, and make your settings via mouse clicks on screen instead. Or you can use the web-server interface to control CNT-102 from a large PC-screen.

The intelligent AUTO SET will help you to make best settings for each measurement function.

You do not even need to be close to your instrument. The web server functionality lets you connect to the CNT-102 over Ethernet, view the front panel, and control the measurements and read results via a few mouse clicks.

When adjusting a frequency source to given limits, the graphic display gives fast and accurate visual calibration guidance.

You can pan and zoom in graphs to view individual samples with cursor read-outs.

Any measured signal can be smoothed, to reveal underlying trends in the presence of excessive noise.

The NEW CNT-102 Multi-channel Frequency Analyzer outperforms every existing benchtop frequency counter/analyzer on the market, except "big brother" CNT-104S, independent of measurement task.

The high-performance CNT-102 is the optimal tool you need for affordable time & frequency measurement, analysis, and calibration.

Measuring Functions

Display modes

Values/Statistics: Numeric display of Measurement values or Statistics parameters with large digits. Values mode also display auxiliary parameter values.

Time-line/Distribution: All measurements are displayed graphically. Multi-channel graphs are color-coded. Statistics values are displayed beneath the graphs.

Resolution Measure up to 2 input signals in parallel with 14 ps resolution per timestamp (Period single, Time Interval, Pulse width, Rise/Fall time, Slew Rate, TIE), or 12 digits/s (frequency, period average).

Smart Frequency/Period avg. calculation mode Statistics resolution enhancement algorithm (*smart mode*) gives up to one extra result digit depending on input signal and measurement setting.

Frequency A, B

Mode: *Parallel measurements* on 1 or 2 inputs.

Back-to-back, with or without smart calculation

Range: 0.001 Hz to 400 MHz

Aux. Parameter: Vmax, Vmin, Vp-p

Frequency C (option)

Mode: Back-to-back, with or without smart calculation

Range: See input C

Aux. Parameter: Period C

Frequency Ratio (A,B, or C) / (A,B, or C)

Mode: *Parallel measurements* on 2 inputs plus division.

Range: (4×10^{-14}) to 2.4×10^{13}

Input Frequency: See input A, B and C

Aux Parameters: Freq 1, Freq 2

Period A, B, C average

Mode: *Parallel measurements* on 1 or 2 inputs.

Back-to-back, with or without smart calculation

Range: See the inverse of Frequency specifications

Aux. Parameter:

- Ch. A, B: Vmax, Vmin, Vp-p
- Ch. C: Frequency C

TIE A, B, C (Option 151)

TIE = Time Interval Error, calculated as: *Accumulated period - Expected ("ideal") accumulated period*

Mode: *Parallel measurements* on 1 or 2 inputs. Back-to-back.

Freq range: See Frequency specifications

Aux. Parameter: Ref Frequency

Period A, B single

Mode: *Parallel measurements* on 1 or 2 inputs

Range: 2.5 ns to 1000 sec.

Aux. Parameter (A, B): Vmax, Vmin, Vp-p

Time Interval A, B (single or continuous)

Mode: *Parallel timestamping* of trigger events on 2 channels on continuous or single-shot signals.

Start and stop channel(s): any of A, B

Note: each input can produce 1 or 2 trigger events with individual trigger level and slope

Accumulated Time Interval: **ON** or **OFF** (adding or subtracting one start channel period to the Time Interval, when required)

Range: -1000s to +1000s

Repetition rate: up to 300 MHz or single-shot events

Min. Pulse width: 1.5 ns

Positive and Negative Pulse Width A, B

Mode: *Parallel measurements* on 1 or 2 inputs

Range: 1.5 ns to 1000 sec.

Repetition rate: up to 300 MHz or single-shot events

Rise/Fall Time, and Slew Rate A, B

Mode 1: *Parallel measurements* on 1 or 2 inputs of Rise OR Fall time, or

Mode 2: *Single* input measurement of Rise AND Fall time on the same pulse, or

Mode 3: *Parallel measurements* on 1 or 2 inputs of Pos OR Neg Slew Rate (80% of Vp-p) / (Rise or Fall Time)

Range: 1.5 ns to 1000 sec.

Min pulse width (between 10% and 90% trigger points): 1.5 ns

Aux. Parameters: Slew rate or Rise/Fall, Vmax, Vmin

Positive and Negative Duty Cycle A, B

Mode: *Single* input measurement

Range: 0.000001 to 0.999999

Repetition rate: up to 300 MHz

Min pulse width: 1.5 ns

Aux. parameters: Period, Pulse width

Phase A Relative B, B Relative A

Mode: Intended for phase shift or delay measurements of two signals with identical frequency

Accumulated Phase: **OFF** or **ON** (adding or subtracting 360° to the Phase, when required)

Range: -180° to +180° (Acc. Phase is OFF)

Resolution: 0.00003° to 100 kHz, decreasing to 0.03° >100 MHz. (10k sample statistics averaging)

Freq. Range: up to 300 MHz

Aux. Parameters: Freq (A), Va/Vb (in dB)

Totalize A, B

Inputs: 1 or 2 inputs (A, B)

Mode: Tot A, B; A+B A-B: A/B

Range: 1 to 10^{15} counts

Freq range: up to 400 MHz

Start control: Manual, start arming

Stop control: Manual, stop arming, timed

Vmax, Vmin, Vp-p A, B

Range: -5 V to +5 V, -50V to +50V

Freq. Range: DC, 1 Hz to 200 MHz

Coupling: Sine (AC>100Hz or DC), Square (DC only)

Resolution: 1 mV (5V range), 10 mV (50V range)

Uncertainty (5V range):

- DC, 1Hz to 1kHz: <1% +15 mV
- 1kHz to 20 MHz sine: 3% +15 mV (typ.)
- 20 to 100 MHz sine: 10% +15 mV (typ.)
- 100 to 200 MHz sine: 30% +15 mV (typ.)

(For square waves add 10% to Vmax./min & 20% to Vp-p)

(For 50V range, add 2% + 150 mV)

Aux parameters: Vmin, Vmax, Vp-p

Input Specifications

Inputs A, B

Frequency Range:

- DC-Coupled: DC to 400 MHz
- AC-Coupled: 10 Hz to 400 MHz

Impedance: 1M Ω // 40 pF or 50 Ω (VSWR $\leq$ 2:1 typ.)

Trigger Slope: Positive or negative

Channel-channel skew: 100 ps rms (after calibration)

Sensitivity (typical):

- DC-400 MHz: <70 mVrms (PreAmp=OFF)
- DC-100 MHz: 15 mVrms (PreAmp=ON)
- 100-200 MHz: 25 mVrms (PreAmp=ON)
- 200-350 MHz: 35 mVrms (PreAmp=ON)
- 350-400 MHz: 50 mVrms (PreAmp=ON)

Hysteresis window: approx. 20 mV (PreAmp=OFF)

Attenuation: x1, x10

Dynamic Range (x1):

PreAmp = OFF: 0.2 to 10 Vp-p within $\pm$ 5V window

PreAmp = ON: 0.01 to 2 Vp-p within $\pm$ 1V window

Trigger Level: Read-out in menu

- Resolution: 1mV
- Uncertainty (x1): $\pm$ (15 mV + 1% of trigger level)

Trigger Level modes: Manual, Relative (to Vp-p), Auto
Auto Trigger Level is set to:

- 50% point of input signal's Vp-p, combined with a wide hysteresis between the 40% and 60% points, for frequency, period average, TIE
- 10% and 90% points, for Rise/Fall Time, Slew rate, combined with minimum hysteresis
- 50% point with minimum hysteresis for all other functions
- Min. voltage 200 mVp-p

Analog LP Filter: Nominal 10 or 100kHz selectable

Max Voltage Without Damage:

- 1M Ω : 350 V (DC + AC pk) to 440 Hz, falling to 12 Vrms at 1MHz.
- 50 Ω : 12 Vrms

Connector: BNC

Input C (Option 10)

Operating Input Power Range opt. 10:

- 100 to 300 MHz: -21 dBm to +35 dBm
- 0.3 to 2.5 GHz: -27 dBm to +35 dBm
- 2.5 to 2.7 GHz: -21 dBm to +35 dBm
- 2.7 to 3.0 GHz: -15 dBm to +35 dBm

Prescaler Factor: 16


Impedance: 50 Ω nominal, VSWR <2.5:1 typ.

Max Power without Damage: +35 dBm

Connector: Type N Female

Input C (Option 110)

Freq. Range: 0.4 to 24 GHz; As standard SW limited by 10 GHz. Upgradable by SW license to 15, 20 or 24 GHz

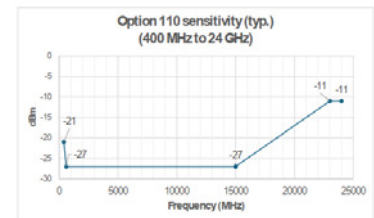

Max Operating Input Power Level: +20 dBm

Prescaler Factor: 64

Impedance: 50 Ω nominal, VSWR <2.0:1 typ.

AM tolerance: > 90% within sensitivity range

Max Power Without Damage: +27 dBm

Connector: 2.92 mm, SMA compatible Female

Rear Panel Inputs and Outputs

Reference Input

Frequency: 1, 5, or 10 MHz; 0.1 to 5Vrms sine

Impedance: 50 Ω (nom.)

Reference Output

Source: External input if used, otherwise internal

Frequency: External ref freq., or 10 MHz (internal)

Output impedance: 50 Ω

Amplitude: 1Vrms sine into 50 Ω (nom.)

Arming Input

Arming of all measuring functions

- Impedance: Approx. 1k Ω
- Freq. Range: DC to 160 MHz
- Trigger level: approx. 1.5V fixed
- Trigger slope: Pos. or neg. selectable

Programmable Pulse Output (Option 132)

Pulse mode: Pulse generator, Gate open, Alarm

Period range: 10ns-2s in 2ns steps

Pos. Pulse width range: 4ns-2s in 2ns steps

Min negative pulse width: 6ns

Rise time: 2.5 ns (nom.)

Output impedance: 50 Ω (nom.)

Output level: Low <0.4V; High: 4.5-5.25V (open output); 2.0-2.5V (50 ohm load)

Auxiliary Functions

Trigger Hold-Off

Time Delay Range: 20 ns to 2 s in 10 ns steps

External Start and Stop Arming

Modes:

- Start Arming
- Stop Arming
- Ext. Gate (combined Start and Stop Arming)

Arming channels: A, B, or rear panel ARM

Arming delay to first trigger ready: <5 ns (typ.)

Start/Stop Time Delay Range: 20 ns to 2 sec.

Statistics

Functions: Maximum, Minimum, Mean, Δ max-min, Standard Deviation and Allan Deviation

Display: Numeric or frequency distribution graph

Sample Size: 2 to 16×10^6 samples

Max. sample rate:

- up to 140 kSa/s calculated
- up to 1 MSa/s captured

Limit alarm

Graphical indication of limits with Pass/Fail message on front panel,

Limit Qualifier: OFF or Capture values above, below, inside or outside limits

Sample Interval (Gate time)

The Sample Interval sets the measuring time (gate) in Frequency/Period modes, the timing gate in Totalized timed measurements, and the time between measurements/samples in all other modes

Range: OFF or 1 μ s to 1000 sec.

Mathematics

Functions: OFF, (K*X-L)/M, (K/X-L)/M, X/M-1

X is current reading, and K (Scale factor), L (Nulling value) and M (Reference value) are constants

Other Functions

Timebase Reference: Internal, External or Auto-selected

Restart: Aborts current measurement and starts a new

Run/Hold: Switch between RUN (continuous measurements) and HOLD (Freezes result, until a new measurement is initiated via Restart)

Save and Recall Settings and Measurements

Instrument Set-ups can be saved/recalled. & user protected.

Measurement results (RAM) can be saved in connected PC, in internal non-volatile memory, and on USB stick.

Max. Measurement Speed and Storage size (RAM): 1 MSa/s (1 or 2 inputs): 32M samples

Time Base Options

Option model	STD	30	40
Time base type:	TCXO	OCXO	OCXO
Uncertainty due to:			
-Aging per 24h	n/a	< 5×10^{-10} (1)	< 3×10^{-10} (1)
per month	< 2×10^{-7} (typ.)	< 1×10^{-8}	< 3×10^{-9}
per year	< 1×10^{-6}	< 5×10^{-8}	< 1.5×10^{-8}
-Temperature variations: 0°C to 50°C	< 5×10^{-7}	< 5×10^{-9}	< 2.5×10^{-9}
20°C to 26°C (typ. values)	not specified	< 1×10^{-9}	< 4×10^{-10}
Short-term stability: $\tau = 1$ s	< 1×10^{-9} (typ.)	< 1×10^{-11}	< 1×10^{-12}
(Allan Deviation) $\tau = 10$ s		< 1×10^{-11}	< 1×10^{-12}
Power-on stability:			
Deviation vs. final value,	< 1×10^{-6}	< 1×10^{-8}	< 5×10^{-9}
after a warm-up time of:	5 min	10 min	10 min
Typical total uncertainty for 24h average, at operating temperature 20°C to 26°C, at 2 σ (95%) confidence interval:			
-1 year after calibration	< 1.2×10^{-6}	< 6×10^{-8}	< 1.8×10^{-8}
-2 years after calibration	< 2.4×10^{-6}	< 1.2×10^{-7}	< 3.5×10^{-8}

Display

Display: Graphic screen for menu control, numerical read-out, status information, plus distribution, trend and time-line graphs

Resolution: 1280x720 pixels

Type: Color Touch 5" TFT LCD display with backlight

Front panel accessible tools: Graph smoothing, pan and zoom, cursor read-out

Remote interfaces

Remote operation

Programmable Functions: All front panel accessible functions

Max. measurement rate (depending on measurement settings):

Block mode: up to 170k readings/s

Individual results: up to 425 readings/s

To Internal Memory: up to 1M readings/s

Data Output format: ASCII, IEEE double precision floating point, or packed

USB interface

USB version: 2.0

Connectors:

Rear panel: 1x Type B; (Device) used for remote communication and data transfer both ways

Protocol: USBTMC-USB488

Front panel: 2x Type A; (Host) 5V (nom.) max. 0.5A. Used for FW updates, mouse/keyboard connection, external result storage, WiFi dongle.

LAN & WLAN interface

Speed: 10/100/1000 Mbps

Capabilities:

- Web server
- SCPI over HiSLIP protocol, compatibility with VISA

Supported WiFi USB-dongles:

TP-Link TL-WN321G, TP-LINK Archer T4U v.2, TP-LINK Archer T4U v.3

Calibration of Timebase Oscillator

Mode: Closed case, electronic calibration, menu controlled. Calibration menu is password protected.

Ref. Cal. Frequencies: 1, 5, 10, 1.544 or 2.048 MHz

General Specifications

Environmental Data

Class: MIL-PRF-28800F, Class 3

Installation category: II

Operating Temp:

0°C to +50°C / 5 to 75% RH, bench-top,
0°C to +40°C / 5 to 75% RH, rack-mount

Storage Temp: -40°C to +71°C

Max altitude: 4600 meters

Vibration: Random and sinusoidal according to MIL-PRF-28800F, Class 3

Shock: Half-sine 30G per MIL-PRF-28800F; Bench handling

Transit drop test: According to MIL-PRF-28800F

Safety: EN 61010-1:2011, pollution degree 2, installation/over voltage category II, measurement category I, CE, indoor use only
CSA C22.2 No 61010-1-12

EMC: EN 61326-1:2013-06, increased test levels according to EN 61000-6-2:2008, Group 1, Class B, CE

Power Requirements

Max. Version: 100 to 240 V_{AC}, 50 to 60 Hz (nom.);
115V, 400 Hz $\pm$ 10% <70 W

Dimensions and Weight

Width x Height x Depth: 210 x 90 x 395 mm
(8.25 x 3.6 x 15.6 in)

Weight: Net 3 kg (6.6 lb)

Ordering Information

Basic model

CNT-102: 2-channel 400 MHz Frequency Analyzer, 14 ps resolution, std. TCXO timebase 1 ppm/year

Input C Frequency Options

Option 10: 3 GHz Input C (HW)

Option 110: 10 GHz Input C (HW)

Option 110/15: upgrade from 10 to 15 GHz (SW)

Option 110/20: upgrade from 15 to 20 GHz (SW)

Option 110/24: upgrade from 20 to 24 GHz (SW)

Timebase Oscillator Options (HW)

Option 30: Very High Stability, OCXO 50 ppb/year

Option 40: Ultra High Stability, OCXO 15 ppb/year

Rear Panel Input Options (HW)

Option 11A: Rear panel A,B inputs (replace front inputs)

Option 11C: Rear panel C input (replace front input)

Other options (SW license enabled)

Option 132: Programmable pulse output

Option 151: TIE measurement function

Included with Instrument:

- 2 year product warranty¹
- Line cord (dependent on destination country)
- Link to User documentation (PDF)
- Certificate of Calibration
- Important information document

¹: Warranty period is extended to 3 years, at no cost, by registering the product within 1 year from delivery

Optional Accessories

- Option 22/90:** Rack-Mount Kit- 1 unit
- Option 22/05:** Rack-Mount Kit -2 units
- Option 27:** Carrying Case - soft
- Option 27H:** Heavy-duty Hard Transport Case
- Option 90/03:** Calibration Certificate with Protocol; Standard TCXO oscillator
- Option 90/06:** Calibration Certificate with Protocol; Oven oscillator
- Option 95/05:** Extended warranty 2 extra years
- OM-100:** User's Manual English (printed)²
- PM-100:** Programmer's Manual English (printed)²
- GS-100-EN:** Getting Started English (printed)²

²: Always available as download from the Pendulum website

¹After 1 month of continuous operation