

# CNT-102

## Multi-channel Frequency Analyzer

DATA SHEET

pendulum

dataTec

Ihr Ansprechpartner /  
Your Partner:


dataTec AG

E-Mail: info@datatec.eu

>>> [www.datatec.eu](http://www.datatec.eu)

Mess- und Prüftechnik. Die Experten.

- Two channel 400 MHz Frequency Analyzer - plus optional RF-channel up to 24 GHz
- NEW measurement modes:  
2 parallel counters in one box
- Gap-free zero-dead-time frequency/period/TIE measurements
- Very high resolution:  
Time: 14 ps  
Freq.: 12-13 digits/s
- Very high meas. speed:  
1M meas./s to internal memory
- Fast bus speed;  
170k meas/s in block mode
- Graphic touch screen display for settings and display of values, statistics (numeric and distribution graph), trend & modulation domain
- The instrument can be controlled locally via touch screen or mouse, or remotely (from anywhere in the world) - via web interface or VNC
- Intelligent and easy-to-use
- Affordable

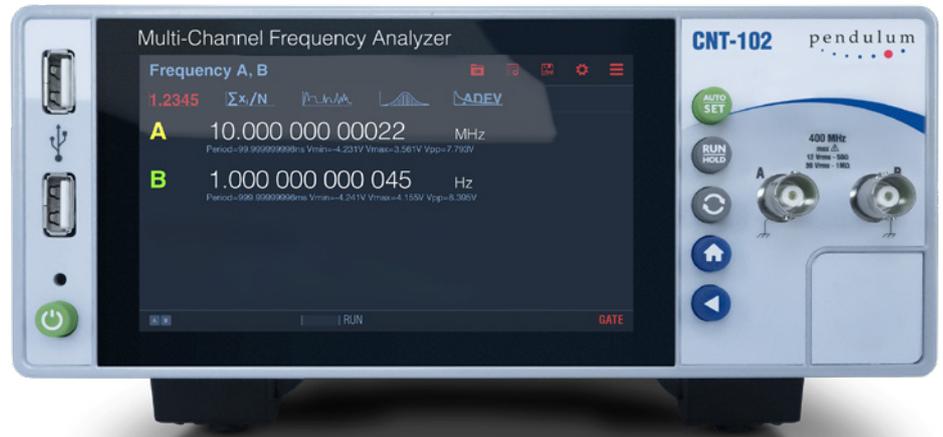

The Pendulum CNT-102 is a **new** affordable model in the CNT-100 family for super-performance **multi-channel** frequency and time-interval analysis in a bench-top unit. You can track parallel frequency, phase or time simultaneously on 2 input channels on the large graphic screen. These instruments feature gap-free measurements, and have 14 ps time resolution, up to 13 digits/s frequency resolution, and a measuring speed of 1M results/s.

CNT-102 outperforms any competing Timer/Counter/Analyzer on the market.

For even higher performance, please check our CNT-104S, a 4-input Multi-channel Frequency Analyzer with 7 ps resolution and a speed of up to 20 MSa/s, or CNT-104R which has Rubidium oscillator, optional GNSS receiver and other benefits on board.

### Highest Performance for R&D and metrology

- The very-high single-shot resolution gives better insights in the design under test, faster results in phase comparisons between clocks, more accurate calibration, and allows capture of very small time/phase changes. Track and compare two signals in parallel with 14 ps resolution/timestamp, with 1  $\mu$ s between samples in each channel.
- Gap-free, zero-dead-time counting provides back-to-back measurements without losing any cycle, even for very long measurements.
- The CNT-102 is also a high-performance Modulation Domain Analyzer (MDA). Thanks to the high measurement speed of up to one million samples/s, on 2 parallel input signals, very fast frequency or phase/time changes can be captured in real time.
- CNT-102 has a unique parallel and independent 2-channel design, plus an optional RF input. Both 400 MHz channels perform parallel, independent, and gap-free time-stamping of the input signals. This allows for new measurements that earlier required many instruments, like phase comparison of 2 atomic clocks to a common reference, without the need for a switch. Or comparing frequency or any pulse parameter simultaneously in two different test points, without moving any test cable or probe.

### Save money in production test

- The 2-channel design enables 2 simultaneous frequency, period, or pulse measurements in parallel. **One CNT-102 can replace two existing frequency counters** in a test system at a lower cost/counter.
- Using the option 22/05 rackmount adapter, you will have 4 parallel frequency counters in a 19", 2U high rack space.
- Choose between Ethernet, WLAN\*, USB\*\*, GPIB as a communication interface to a PC/Laptop/Tablet, or to the test system controller.
- High bus speed reduces test time in ATE test systems. Perform fast block measurements up to 170k meas/s. Test time is reduced compared to existing solutions, and time is money.

\* Requires an external USB Wi-Fi dongle

\*\* Later availability via free SW upgrade

## Easy-to-understand Graphical Presentation

One of the great features of the CNT-102 is the graphic display with its menu oriented settings. The non-expert can easily make correct settings, thanks to the guided instruction on most setting pages.

Valuable signal information, given in multi-parameter displays, removes the need for other instruments like DVM's and Scopes for quick signal verification.

Measured values are presented as both numerics and graphics. The graphical presentation of results (distribution, trends etc.) gives a better understanding of the nature of jitter. It also provides you with a much better view of changes vs time, from slow drift to fast modulation. The same data set can be viewed in Numerical, Statistics, Distribution, Time-line and ADEV views. It is very easy to capture and toggle between views of the same data set.



Compare 2 signals simultaneously on screen, with statistics parameters below. 2 instruments in one!

## Modulation Domain Analysis

The CNT-102 features built-in modulation domain analysis, displaying frequency changes vs. time, on one or two input channels.

Thanks to the high resolution, and the high measurement speed of down to 1 μs between individual samples in each channel, you can follow and verify for example:

- FM, FSK, BPSK, PWM, PPM and other time, phase or frequency modulation schemes
- Frequency sweep
- Frequency transients
- Frequency settling in oscillators, VCOs and PLLs
- Synthesizer switching
- Frequency instability, incl. jitter
- Frequency hopping agile communication



View fast FM, or any time/phase/frequency modulation, on screen, on one or two channels. Here we see FM modulation with both sine and square wave shape

## Full flexibility for remote control

The CNT-102 comes as standard with a Gbit Ethernet interface for remote control and data transfer.

Using a Wi-Fi dongle in the front panel USB port, enables you to connect CNT-102 to your local wireless network.

USB 2.0 and optional GPIB interfaces are also available.

You can access and control the instrument from your lab bench, or from anywhere in the world, using the integrated web interface function.

## Very flexible configuration

The CNT-102 can be configured as you like it to fit performance demands and/or budget.

- Add an optional extra channel C for RF frequency measurements. Choose either a 3 GHz, or 10 GHz, basic HW (the 10 GHz channel is SW key upgradable to 15, 20, or 24 GHz)
- Choose between 3 timebase oscillator options; the standard TCXO and 2x OCXO
- Add an optional 0.5 Hz to 100 MHz pulse generator (SW license key)
- Add optional TIE and Frequency Offset measurement functions, and graphic dynamic ADEV view of current inputs (SW license key)

## Outstanding ease-of-use

The big color touch screen with its intuitive menus lets you make your settings via a simple finger touch. Alternatively you can connect a wireless mouse to the front USB host port, and make your settings via mouse clicks on screen instead. Or you can use the web-server interface to control CNT-102 from a large PC-screen.

The intelligent AUTO SET will help you to make best settings for each measurement function.

You do not even need to be close to your instrument. The web server functionality lets you connect to the CNT-102 over Ethernet, view the front panel, and control the measurements and read results via a few mouse clicks.

When adjusting a frequency source to given limits, the graphic display gives fast and accurate visual calibration guidance.

You can pan and zoom in graphs to view individual samples with cursor read-outs.

Any measured signal can be smoothed, to reveal underlying trends in the presence of excessive noise.

The NEW CNT-102 Multi-channel Frequency Analyzer outperforms every existing benchtop frequency counter/analyzer on the market, except "big brothers" CNT-104S and CNT-104R, independent of measurement task.

**The high-performance CNT-102 is the optimal tool you need for affordable time & frequency measurement, analysis, and calibration.**

## Measuring Functions

### Display modes

**Values/Statistics:** Numeric display of Measurement

values or Statistics parameters with large digits. Values mode also display auxiliary parameter values.

**Time-line/Distribution:** All measurements are displayed graphically. Multi-channel graphs are color-coded. Statistics values are displayed beneath the graphs.

**ADEV Graph (Option 161):** Enables calculation of ADEV values for a range of intervals, displays results in graphical and textual form, with possibility to save them into a file.

**Resolution** Measure up to 2 input signals in parallel with 14 ps resolution per timestamp (Period single, Time Interval, Pulse width, Rise/Fall time, Slew Rate, TIE), or 12 digits/s (frequency, period average).

### Smart Frequency/Period avg. calculation mode

Statistics resolution enhancement algorithm (*smart mode*) gives up to one extra result digit depending on input signal and measurement setting.

### Frequency A, B

**Mode:** *Parallel measurements* on 1 or 2 inputs.

Back-to-back, with or without smart calculation

**Range:** 0.001 Hz to 400 MHz

**Aux. Parameter:** Vmax, Vmin, Vp-p

### Frequency C (option)

**Mode:** Back-to-back, with or without smart calculation

**Range:** See input C

**Aux. Parameter:** Period C

### Frequency Ratio (A,B, or C) / (A,B, or C)

**Mode:** *Parallel measurements* on 2 inputs plus division.

**Range:**  $4 \times 10^{-14}$  to  $2.4 \times 10^{13}$

**Input Frequency:** See input A, B and C

**Aux Parameters:** Freq 1, Freq 2

### Frequency Difference (A, B or C) - (A, B or C)

**Mode:** *Parallel measurements* on 2 inputs plus subtraction.

**Input Frequency:** See input A, B and C

**Aux Parameters:** Freq 1, Freq 2

### Frequency Offset A, B, C (Option 152)

**Mode:** Parallel measurements on 1 or 2 inputs, measures relative Frequency Offset from nominal frequency.

**Range:** see Frequency for inputs A, B, C

**Input Frequency:** see input A, B, C

### Period A, B, C average

**Mode:** *Parallel measurements* on 1 or 2 inputs.

Back-to-back, with or without smart calculation

**Range:** See the inverse of Frequency specifications

**Aux. Parameter:**

- Ch. A, B: Vmax, Vmin, Vp-p

- Ch. C: Frequency C

### TIE A, B, C (Option 151)

**TIE = Time Interval Error**, calculated as: Accumulated period - Expected ("ideal") accumulated period

**Mode:** *Parallel measurements* on 1 or 2 inputs. Back-to-back.

**Freq range:** See Frequency specifications

**Aux. Parameter:** Ref Frequency

### Period A, B single

**Mode:** *Parallel measurements* on 1 or 2 inputs

**Range:** 2.5 ns to 1000 s

**Aux. Parameter (A, B):** Vmax, Vmin, Vp-p

### Time Interval A, B (single or continuous)

**Mode:** *Parallel timestamping* of trigger events on 2 channels on continuous or single-shot signals.

**Start and stop channel(s):** any of A, B

**Note:** each input can produce 1 or 2 trigger events with individual trigger level and slope

**Accumulated Time Interval:** **ON** or **OFF** (adding or subtracting one start channel period to the Time Interval, when required)

**Range:** -1000 s to +1000 s

**Repetition rate:** up to 300 MHz or single-shot events

**Min. Pulse width:** 1.5 ns

### Positive and Negative Pulse Width A, B

**Mode:** *Parallel measurements* on 1 or 2 inputs

**Range:** 1.5 ns to 1000 s

**Repetition rate:** up to 300 MHz or single-shot events

### Rise/Fall Time, and Slew Rate A, B

**Mode 1:** *Parallel measurements* on 1 or 2 inputs of Rise OR Fall time, or

**Mode 2:** *Single* input measurement of Rise AND Fall time on the same pulse, or

**Mode 3:** *Parallel measurements* on 1 or 2 inputs of Pos OR Neg Slew Rate (80% of Vp-p) / (Rise or Fall Time)

**Range:** 1.5 ns to 1000 s

**Min pulse width** (between 10% and 90% trigger points): 1,5 ns

**Aux. Parameters:** Slew rate or Rise/Fall, Vmax, Vmin

### Positive and Negative Duty Cycle A, B

**Mode:** *Single* input measurement

**Range:** 0.000001 to 0.999999

**Repetition rate:** up to 300 MHz

**Min pulse width:** 1,5 ns

**Aux. parameters:** Period, Pulse width

### Phase A Relative B, B Relative A

**Mode:** Intended for phase shift or delay measurements of two signals with identical frequency

**Accumulated Phase:** **OFF** or **ON** (adding or subtracting 360° to the Phase, when required)

**Range:** -180° to +180° (Acc. Phase is OFF)

**Resolution:** 0.00003° to 100 kHz, decreasing to 0.03° > 100 MHz. (10k sample statistics averaging)

**Freq. Range:** up to 300 MHz

**Aux. Parameters:** Freq (A), Va/Vb (in dB)

### Totalize A, B

**Inputs:** 1 or 2 inputs (A, B)

**Mode:** Tot A, B; A+B A-B: A/B

**Range:** 1 to  $10^{15}$  counts

**Freq range:** up to 400 MHz

**Start control:** Manual, start arming

**Stop control:** Manual, stop arming, timed

### Vmin, Vmax, Vp-p, DC Offset A, B

**Range:** -5 V to +5 V, -50 V to +50 V

**Freq. Range:** DC, 1 Hz to 200 MHz

**Coupling:** Sine (AC > 100 Hz or DC), Square (DC only)

**Resolution:** 1 mV (5 V range), 10 mV (50 V range)

**Uncertainty (5V range):**

- DC, 1 Hz to 1 kHz: <1% +15 mV
- 1 kHz to 20 MHz sine: 3% +15 mV (typ.)
- 20 to 100 MHz sine: 10% +15 mV (typ.)
- 100 to 200 MHz sine: 30% +15 mV (typ.)

(For square waves add 10% to Vmax,/min & 20% to Vp-p)

(For 50 V range, add 2% + 150 mV)

**Aux parameters:** Vmin, Vmax, Vp-p

## Input Specifications

### Inputs A, B

**Frequency Range:**

- DC-Coupled: DC to 400 MHz
- AC-Coupled: 10 Hz to 400 MHz

**Impedance:** 1M $\Omega$  // 40 pF or 50  $\Omega$  (VSWR  $\leq$ 2:1 typ.)

**Trigger Slope:** Positive or negative

**Channel-channel skew:** 25 ps rms (after calibration)

**Sensitivity (typical):**

- DC-400 MHz: <70 mVrms (PreAmp=OFF)
- DC-100 MHz: 15 mVrms (PreAmp=ON)
- 100-200 MHz: 25 mVrms (PreAmp=ON)
- 200-350 MHz: 35 mVrms (PreAmp=ON)
- 350-400 MHz: 50 mVrms (PreAmp=ON)

**Hysteresis window:** approx. 20 mV (PreAmp=OFF)

**Attenuation:** x1, x10

**Dynamic Range (x1):**

PreAmp = OFF: 0.2 to 10 Vp-p within  $\pm$ 5 V window

PreAmp = ON: 0.04 to 2 V p-p within  $\pm$ 1 V window

**Trigger Level:** Read-out in menu

- Resolution: 1 mV
- Uncertainty (x1):  $\pm$ (15 mV + 1% of trigger level)

**Trigger Level modes:** Manual, Relative (to Vp-p), Auto

**Auto Trigger Level** is set to:

- 50% point of input signal's Vp-p, combined with a wide hysteresis between the 40% and 60% points, for frequency, period average, TIE
- 10% and 90% points, for Rise/Fall Time, Slew rate, combined with minimum hysteresis
- 50% point with minimum hysteresis for all other functions
- Min. voltage 200 mVp-p

**Analog LP Filter:** Nominal 10 or 100 kHz selectable

**Max Voltage Without Damage:**

- 1M  $\Omega$ : 350 V (DC + AC pk) to 440 Hz, falling to 12 Vrms at 1 MHz.
- 50  $\Omega$ : 12 Vrms

**Connector:** BNC

### Input C (Option 10)

**Operating Input Power Range opt. 10:**

- 100 to 300 MHz: -21 dBm to +35 dBm
- 0.3 to 2.5 GHz: -27 dBm to +35 dBm
- 2.5 to 2.7 GHz: -21 dBm to +35 dBm
- 2.7 to 3.0 GHz: -15 dBm to +35 dBm

**Prescaler Factor:** 16


**Impedance:** 50  $\Omega$  nominal, VSWR <2.5:1 typ.

**Max Power without Damage:** +35 dBm

**Connector:** Type N Female

## Input C (Option 110)

**Freq. Range:** 0.4 to 24 GHz; As standard SW limited by 10 GHz. Upgradable by SW license to 15, 20 or 24 GHz

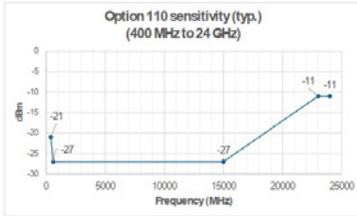

**Max Operating Input Power Level:** +20 dBm  
**Prescaler Factor:** 64  
**Impedance:** 50 Ω nominal, VSWR <2.0:1 typ.  
**AM tolerance:** > 90% within sensitivity range  
**Max Power Without Damage:** +27 dBm  
**Connector:** 2.92 mm, SMA compatible Female

## Rear Panel Inputs and Outputs

### Reference Input

**Frequency:** 1 MHz: 0.2 to 5 Vrms sine;  
 5 or 10 MHz: 0.1 to 5 Vrms sine  
**Impedance:** 50 Ω (nom.)

### Reference Output

**Source:** External input if used, otherwise internal  
**Frequency:** External ref freq., or 10 MHz (internal)  
**Output impedance:** 50 Ω  
**Amplitude:** 1Vrms sine into 50 Ω (nom.)

### Arming Input

Arming of all measuring functions

- Impedance: Approx. 1 kΩ
- Freq. Range: DC to 160 MHz
- Trigger level: approx. 1.5 V fixed
- Trigger slope: Pos. or neg. selectable

### Programmable Pulse Output (Option 132)

**Pulse mode:** Pulse generator, Gate open, Alarm  
**Period range:** 10 ns - 2 s in 2 ns steps  
**Pos. Pulse width range:** 4 ns-2 s in 2 ns steps  
**Min negative pulse width:** 6 ns  
**Rise time:** 2.5 ns (nom.)  
**Output impedance:** 50 Ω (nom.)  
**Output level:** Low <0.4 V; High: 4.5-5.25 V (open output); 2.0-2.5 V (50 Ω load)

## Time Base Options

Option model	STD	30	40
Time base type:	TCXO	OCXO	OCXO
Uncertainty due to:			
-Aging per 24h per month per year	n/a	<5x10 <sup>-10</sup> (1)	<3x10 <sup>-10</sup> (1)
-Temperature variations: 0°C to 50°C 20°C to 26°C (typ. values)	<2x10 <sup>-7</sup> (typ.) <1x10 <sup>-6</sup> <5x10 <sup>-7</sup> not specified	<1x10 <sup>-8</sup> <5x10 <sup>-8</sup> <5x10 <sup>-9</sup> <1x10 <sup>-9</sup>	<3x10 <sup>-9</sup> <1.5x10 <sup>-8</sup> <2.5x10 <sup>-9</sup> <4x10 <sup>-10</sup>
Short-term stability: τ =1s (Allan Deviation) τ =10s	<1x10 <sup>-9</sup> (typ.)	<1x10 <sup>-11</sup> <1x10 <sup>-11</sup>	<1x10 <sup>-12</sup> <1x10 <sup>-12</sup>
Power-on stability: Deviation vs. final value, after a warm-up time of:	<1x10 <sup>-6</sup> 5 min	<1x10 <sup>-8</sup> 10 min	<5x10 <sup>-9</sup> 10 min
Typical total uncertainty for 24h average, at operating temperature 20°C to 26°C, at 2σ (95%) confidence interval:			
-1 year after calibration	<1.2x10 <sup>-6</sup>	<6x10 <sup>-8</sup>	<1.8x10 <sup>-8</sup>
-2 years after calibration	<2.4x10 <sup>-6</sup>	<1.2x10 <sup>-7</sup>	<3.5x10 <sup>-8</sup>

<sup>1</sup>After 1 month of continuous operation

## Auxiliary Functions

### Trigger Hold-Off

**Time Delay Range:** 20 ns to 2 s in 10 ns steps

### External Start and Stop Arming

**Modes:**

- Start Arming
- Stop Arming
- Ext. Gate (combined Start and Stop Arming)

**Arming channels:** A, B, or rear panel ARM

**Arming delay to first trigger ready:** <5 ns

**Start/Stop Time Delay Range:** 20 ns to 2 sec.

### Statistics

**Functions:** Maximum, Minimum, Mean, Δmax-min, Standard Deviation and Allan Deviation

**Display:** Numeric or frequency distribution graph

**Sample Size:** 2 to 16x10<sup>6</sup> samples

**Max. sample rate:**

- up to 140 kSa/s calculated
- up to 1 MSa/s captured

### ADEV graph (Option 161)

Besides the "Statistics" block, ADEV values for different τ values can be calculated and displayed on a separate plot.

Supported measurement functions: Frequency, Period Average, Frequency Offset, Time Interval, Time Interval Single, TIE functions.

Support for down-converted signals with Math function K×X+L

**ADEV range:** 1 μs to >24 h, selectable via Sample Interval and Sample Count

**Floor @ 1 s:** 2x10<sup>-11</sup>

**Floor @ 1000 s:** 2.2x10<sup>-14</sup>

### Limit alarm

Graphical indication of limits with Pass/Fail message on front panel, SNMP notifications or Pulse Output.

**Limit Qualifier:** OFF or Capture values above, below, inside or outside limits

### Sample Interval (Gate time)

The Sample Interval sets the measuring time (gate) in Frequency/Period modes, the timing gate in Totalized timed measurements, and the time between measurements/samples in all other modes except Voltage mode (fixed interval) and Frequency Offset mode (preset gate time, depending on set required accuracy).

**Range:** OFF or 1 μs to 1000 s

## Mathematics

**Functions:** OFF, (K\*X-L)/M, (K/X-L)/M, X/M-1  
 X is current reading, and K (Scale factor), L (Nulling value) and M (Reference value) are constants

## Other Functions

**Timebase Reference:** Internal, External or Auto-selected

**Restart:** Aborts current measurement and starts a new

**Run/Hold:** Switch between RUN (continuous measurements) and HOLD (Freezes result, until a new measurement is initiated via Restart)

## Save and Recall Settings and Measurements

**Instrument Set-ups** can be saved/recalled & user protected.

**Measurement results (RAM)** can be saved in connected PC, in internal non-volatile memory, and on USB stick.

**Max. Measurement Speed and Storage size (RAM):**

1 MSa/s (1 or 2 inputs): 32M samples

## Display

**Display:** Graphic screen for menu control, numerical read-out, status information, plus distribution, trend and time-line graphs

**Resolution:** 1280x720 pixels

**Type:** Color Touch 5" TFT LCD display with backlight

**Front panel accessible tools:** Graph smoothing, pan and zoom, cursor read-out

## Remote interfaces

### Remote operation

**Programmable Functions:** All front panel accessible functions

**Data Output format:** ASCII, IEEE double precision floating point, or packed

### USB interface

**USB version:** 2.0

**Connectors:**

**Rear panel:** 1x Type B; (Device) used for remote communication and data transfer both ways

**Protocol:** RNDIS (Ethernet over USB)\*

**Front panel:** 2x Type A; (Host) 5 V (nom.) max. 0.5 A. Used for FW updates, mouse/keyboard connection, external result storage, WiFi dongle.

\* later availability

## LAN & WLAN interface

**Speed:** 10/100/1000 Mbps

**Max. measurement rate (depending on measurement settings):**

**Block mode:** up to 170k readings/s

**Individual results:** up to 425 readings/s

**Capabilities:**

- Web server
- SCPI over HiSLIP protocol, compatibility with VISA

**Supported WiFi USB-dongles:**

TP-Link TL-WN321G, TP-LINK Archer T4U v.2, TP-LINK Archer T4U v.3

## GPIB (Option 26)

**Compatibility:** IEEE 488.2-1987, SCPI 1999

**Interface Functions:** SH1, AH1, T6, L4, SR1, RL1, E2, DC1

**Max measurement speed:**

220 readings/s for individual measurements

7300 readings/s for block measurements

## Calibration of Timebase Oscillator

**Mode:** Closed case, electronic calibration, menu controlled. Calibration menu is password protected.

**Ref. Cal. Frequencies:** 1, 5, 10, 1.544 or 2.048 MHz

## General Specifications

### Environmental Data

**Class:** MIL-PRF-28800F, Class 3

**Installation category:** II

### Operating Temp:

0°C to +50°C / 5 to 75% RH, bench-top,

0°C to +40°C / 5 to 75% RH, rack-mount

**Storage Temp:** -40°C to +71°C

**Max altitude:** 4600 meters

**Vibration:** Random and sinusoidal according to MIL-PRF-28800F, Class 3

**Shock:** Half-sine 30G per MIL-PRF-28800F; Bench handling

**Transit drop test:** According to MIL-PRF-28800F

**Safety:** EN 61010-1:2011, pollution degree 2, installation/over voltage category II, measurement category I, CE, indoor use only  
CSA C22.2 No 61010-1-12

**EMC:** EN 61326-1:2013-06, increased test levels according to EN 61000-6-2:2008, Group 1, Class B, CE

### Power Requirements

**Max. Version:** 100 to 240 V<sub>AC</sub>, 50 to 60 Hz (nom.);  
115 V, 400 Hz ± 10% <70 W

### Dimensions and Weight

**Width x Height x Depth:** 210 x 90 x 395 mm  
(8.25 x 3.6 x 15.6 in)

**Weight:** Net 3 kg (6.6 lb)

## Ordering Information

### Basic model

**CNT-102:** 2-channel 400 MHz Frequency Analyzer, 14 ps resolution, std. TCXO timebase 1 ppm/year

### Input C Frequency Options

**Option 10:** 3 GHz Input C (HW)

**Option 110:** 10 GHz Input C (HW)

**Option 110/15:** upgrade from 10 to 15 GHz (SW)

**Option 110/20:** upgrade from 15 to 20 GHz (SW)

**Option 110/24:** upgrade from 20 to 24 GHz (SW)

### Timebase Oscillator Options (HW)

**Option 30:** Very High Stability, OCXO 50 ppb/year

**Option 40:** Ultra High Stability, OCXO 15 ppb/year

### Rear Panel Input Options (HW)

**Option 11A:** Rear panel A, B inputs (replace front inputs)

**Option 11C:** Rear panel C input (replace front input)

**Option 26:** GPIB Interface

**Option 31:** GPIB connector extender: used to enable simultaneous connection of GPIB and Ethernet cables

### Other options (SW license enabled)

**Option 132:** Programmable pulse output

**Option 151:** TIE measurement function

**Option 152:** Frequency Offset function

**Option 161:** ADEV graph presentation view mode

### Included with Instrument:

- 2 year product warranty<sup>1</sup>
- Line cord (*dependent on destination country*)
- Link to User documentation (PDF)
- Certificate of Calibration
- Important information document

<sup>1</sup>: Warranty period is extended to 3 years, at no cost, by registering the product within 1 year from delivery

## Optional Accessories

- **Option 22/90:** Rack-Mount Kit - 1 unit
- **Option 22/05:** Rack-Mount Kit - 2 units
- **Option 27:** Carrying Case - soft
- **Option 27H:** Heavy-duty Hard Transport Case
- **Option 90/03:** Calibration Certificate with Protocol; Standard TCXO oscillator
- **Option 90/06:** Calibration Certificate with Protocol; Oven oscillator
- **Option 90/06A:** ISO17025 Accredited Calibration Certificate with Protocol; Oven oscillator
- **Option 95/05:** Extended warranty 2 extra years
- **OM-100:** User's Manual English (printed)<sup>2</sup>
- **PM-100:** Programmer's Manual English (printed)<sup>2</sup>
- **GS-100-EN:** Getting Started English (printed)<sup>2</sup>

<sup>2</sup>: Always available as download from the Pendulum website

pendulum

dataTec

© Pendulum Instruments 2026

04.03.2026 CNT-102 rev.15

Specifications subject to change or improvements without notice. 4031 601 10211

Ihr Ansprechpartner /  
Your Partner:

dataTec AG

E-Mail: info@datatec.eu

>>> [www.datatec.eu](http://www.datatec.eu)

Mess- und Prüftechnik. Die Experten.