

Specifications

Sonoma Instrument® 317 Broadband Amplifier

Bandwidth	10 kHz - 2.5 GHz	- 3 dB at 1 GHz
Gain	38 ± 1.5 dB 80 V / V	non-inverting, 50 Ω load
Gain Flatness	± 0.75 dB	500 kHz - 2 GHz
Noise Figure	4.8 dB	10 MHz - 2 GHz
Equivalent Input Noise Voltage	0.78 nV / √ Hz	including 0.45 nV / √ Hz from a 50 Ω source
Output at 1dB Gain Compression	+15 dBm	3.5 Vp-p, 10 MHz - 2.5 GHz
Maximum Input for Linear Operation	approx. ± 22 mV	
Harmonic Distortion	- 45 dBc typ.	0 dBm out, 10 MHz - 1.25 GHz
Third Order Intercept Point	+ 28 dBm typ.	at 300 MHz
Impedance	50 Ω	a.c. coupled
Input Return Loss	14 dB typ. 8 dB typ.	10 MHz - 1.5 GHz 1.5 - 2.5 GHz
Output Return Loss	12 dB typ.	10 MHz - 2.5 GHz
Reverse Isolation	44 dB	10 MHz - 2.5 GHz
Rise Time	120 psec	typical
Group Delay Variation	± 30 psec	45 MHz - 2.5 GHz

Connectors: Type N

Input Damage Level:
 D.C. ± 1V
 R.F. - 22 dBm
 Pulse ± 25 mV

Temperature Range:
 Operating: 0 to + 55 °C
 Storage: - 25 to + 75 °C


Altitude: 15,240 ft / 5000 m

Power Requirements:
 100, 120, 220, or 240 V a.c.
 50 - 60 Hz, 20 VA

Size: 3.6 × 4.3 × 7.2" (H × W × D)
 91 × 109 × 183 mm

Net Weight: 3.3 lb / 1.5 kg

Frequency Response (Typical)

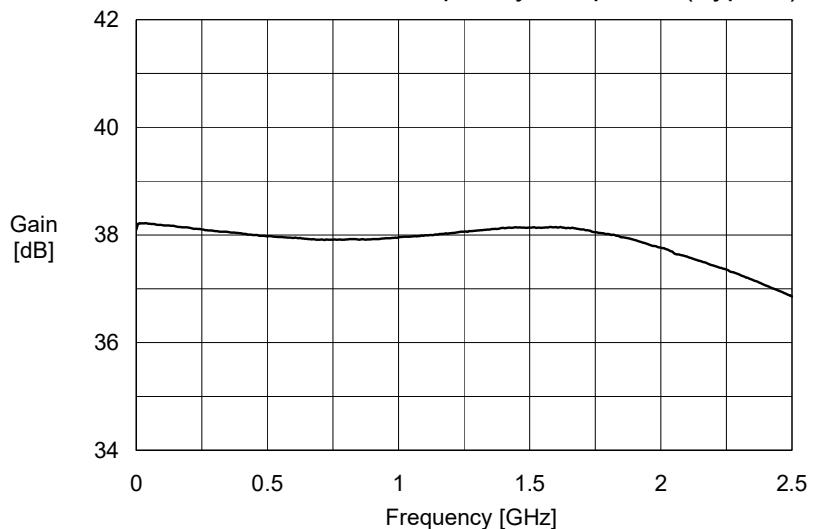

DATA SUBJECT TO CHANGE



**SONOMA
INSTRUMENT**



**Ihr Ansprechpartner /
Your Partner:**

dataTec AG
 E-Mail: info@datatec.eu
 >>> www.datatec.eu



SEPTEMBER 2010 ©
 Sonoma Instrument Co.

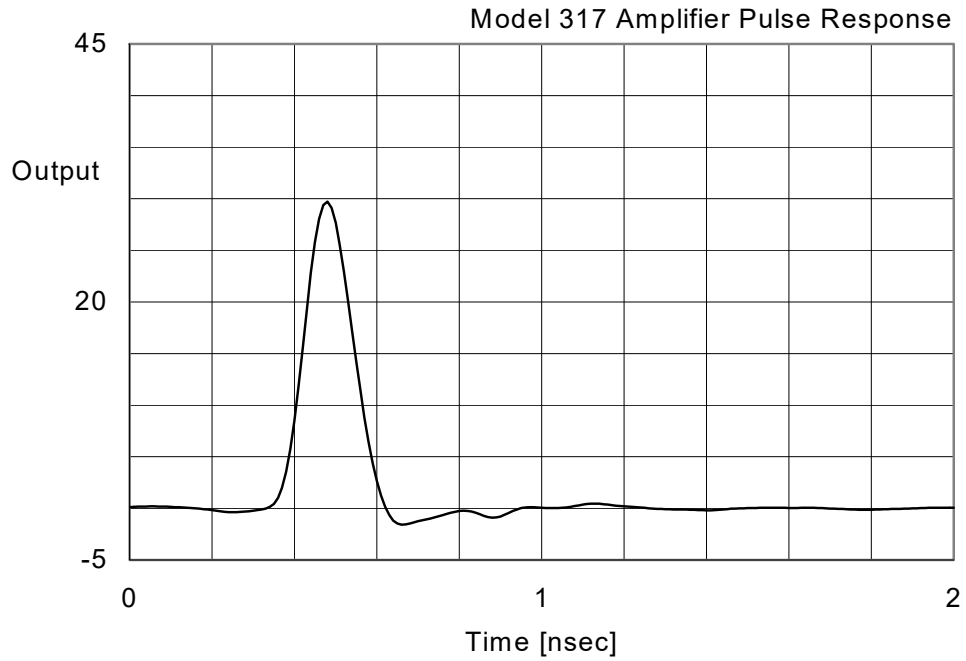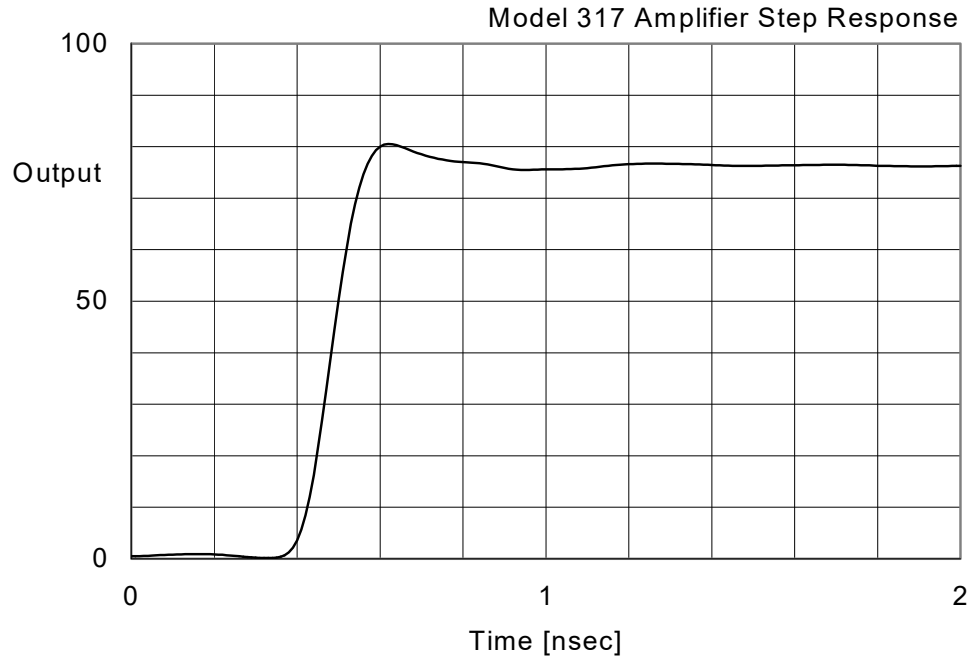

DATA SUBJECT TO CHANGE

Outline Drawing

inch [mm]

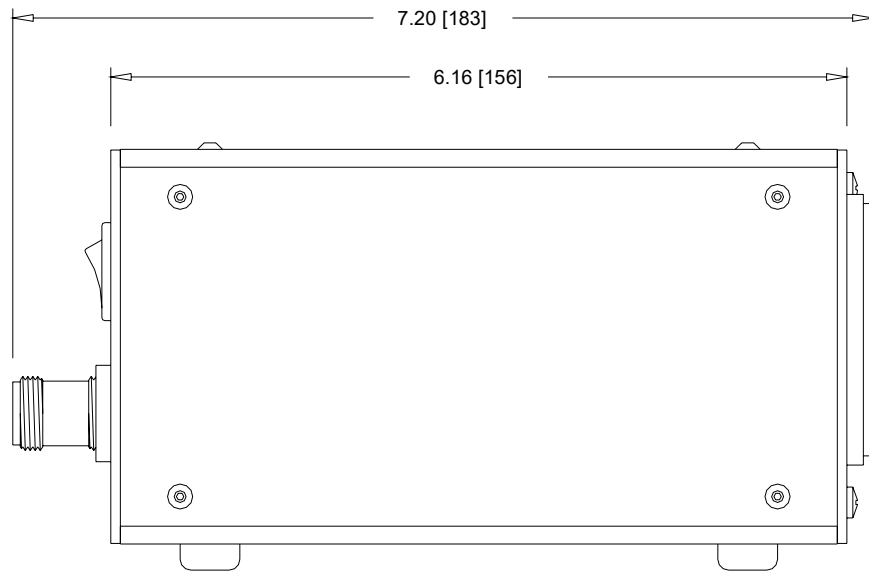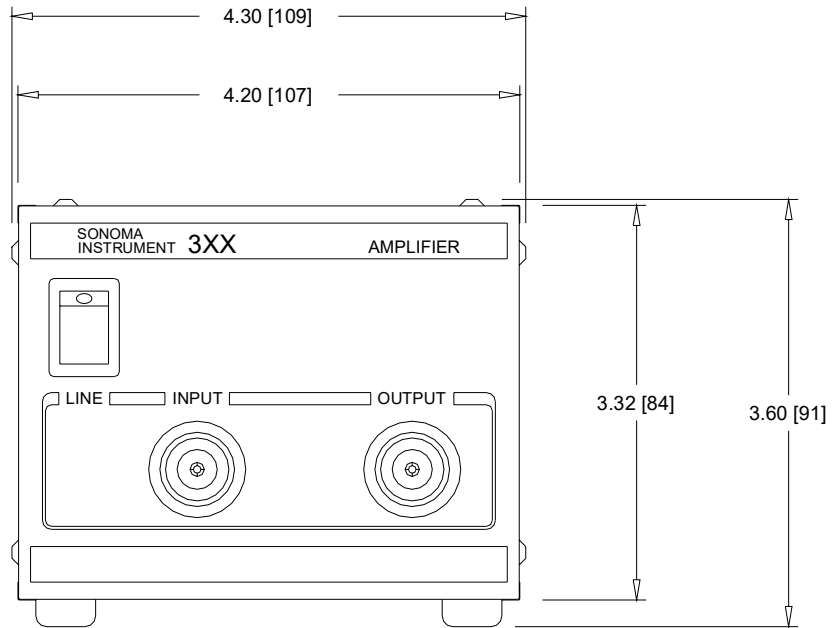

DATA SUBJECT TO CHANGE

SONOMA
INSTRUMENT

dataTec

Ihr Ansprechpartner /
Your Partner:

dataTec AG
E-Mail: info@datatec.eu
>>> www.datatec.eu

SEPTEMBER 2010 ©
Sonoma Instrument Co.