

**High-power technology**

## AC and DC Voltage sources GTS1K series

- *powers from 1kVA up to 300KVA*
- *single phase output*
- *output frequency DC – 2000Hz*
- *connectable in parallel up to 1MVA*
- *bandwidth >2500Hz*
- *synchronizable for poliphase systems*
- *Sequencer timer*
- *Multiscale systems*
- *output waveforms sinusoidal or arbitrary*
- *access to PID regulation parameters*
- *accuracy better than 0.3%*
- *harmonic distortion lower than 0.2%*
- *insulated output*
- *software for PC control*

### Typical applications

- Conversion DC, 50/60/400Hz
- Test appliances and equipments with injection of harmonics or special wave forms
- Trafo, coils, cores tests

### Description

**The voltage sources GTS series** are static constant voltage generators, the models cover the range from 1KVA up to 200KVA. Synchronizable for polyphase systems or parallelable up to 1000KVA.

The GTS sources deliver DC and AC voltages very stable in all load conditions with output frequencies from DC to 2000Hz, providing sinusoidal or arbitrary waveforms. They can have up to two voltage scales with manual or automatic switching to suit the load conditions without penalizing the output power. Equipped with a modern and simple user interface combined with a large LCD display they offer the possibility to make multiple applications. They are designed in 19" built-in or table rack (low powers), in wheeled cabinet (medium powers) or cabinet, there are also available models with electronic and power separated for mounting on board. Ideal for laboratory applications, they play an important role in the final product test. Programmable via serial RS485, RS232, optional USB, LAN or optic fiber. The analog input (BOOSTER) allows the use as power amplifier and 8 programmable digital I / O ensure a perfect integration with automatic test lines

### Applications

The GTS source series is very robust with low costs and it is equipped with a sequencer timer that provides the ability to set very simply voltage and delivery times with 1 mS resolution allowing the programming of ramps, dips, loops to create test programs according to standards or test procedures.

Following informations are provided:

voltage supplied

output current

elapsed time

active and reactive power

load impedance

these features allow the use in many fields such as: testing on various conditions of electrical equipment with clean power, with injection of harmonics or with particular waveforms



coil, transformers, laminated cores tests

polyphase systems with timing and voltage values that can be set on each phase


testing and calibration of measuring instruments

## Main features

Output features		Current measurement	
Output voltage	20 ÷ 850Vdc 28 ÷ 120Vdc	Range	+10% F.S.
Output power	1KVA ÷ 300KVA	Resolution	0.5%
Overload	120% standard Optional up to 300%	Accuracy	0.5%
Number of scales	1 ÷ 2	Voltage measurement	
Voltage resolution	0.3% F.S.	Range	+10% F.S.
Minimum settable voltage	0V	Resolution	0.2%
Accuracy	0.3%F.S.	Accuracy	0.3%
Line regulation	Typ 0.1% F.S.	Additional measures	PF, Impedance, Frequency
Load regulation	Typ 0.2% F.S.	Supply	
Linearity	0.1% F.S.	Line voltage	230V 1F $\pm 10\%$ / 400V 3F $\pm 10\%$
DC offset	0.3%	Frequency	45 ÷ 65Hz
Max output ripple HF	Typ 0.3%F.S.	Cosphi	Typ 0.85
Output frequency		Line protection	Automatic switch
Range	DC ÷ 2000Hz	Connections	Internal or external
Resolution	0.01Hz	Others	
Accuracy	0.15%	Dimensions	According to the model 19" rack or cabinet
Bandwidth	2500Hz	Weight	According to the model
Max THD at 50-60Hz	Typ 0.2%	Output connections	Front or back-side
Sequencer timer		Operating temperature	5 ÷ 40°C
Range	1mS ÷ $\infty$	Storage temperature	-5 ÷ 60°C
Resolution	1mS	Protection	IP20
Max step no.	30	Cooling	Forced air
Mode	Auto repeat, ramp, pause- resume, continuous or pulsed	Noise at 1mt	Typ 65dbA
Synchronism / Phase shift		Safety and EMC	CE (EMC and LVDT)
Synchronization	Auto / grid / external	Insulation	
Phase shift	0 ÷ 360°	Line / output / GND	2500Vrms
Resolution	1°	Output / GND	1500Vrms
Accuracy	$\pm 1^\circ$	Maximum output voltage applicable / GND	It depends on the output voltage
Start angle	0 ÷ 360°	Interfaces	
Resolution	1°	Communication	RS232 and 485 isolated Optional USB, LAN, Optic fiber
Accuracy	$\pm 1^\circ$	Digital inputs	4, 24V NPN programmable
		Digital outputs	4, 24V PNP programmable
		Booster for external	0 ÷ 20pk-pk (use as amplifier)
		Analog control	
		Other	Trig-in, Trig-out for synchronism

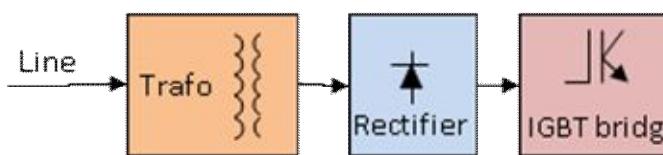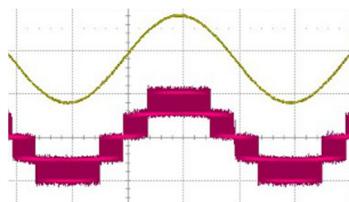

Principled and modulation schemes

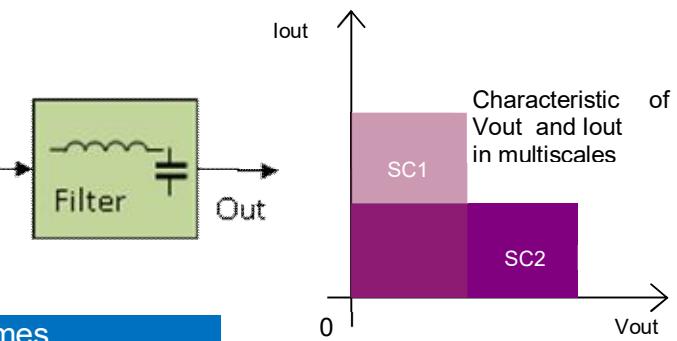



High-power technology

Available powers
1000VA
2500VA
5KVA
7.5KVA
10KVA
15KVA
20KVA
30KVA
50KVA
75KVA
100KVA
150KVA
200KVA
200KVA

Available standard voltages
20V
50V
100V
200V
300V
500V
850V
Double scale
50/100V
150/300V
250/500V
425/850V
Other voltages on request

## AC and DC Voltage sources GTS1K series

### Options / Finishings on request

/M-GI-SW	Software GVmanager with single phase arbitrary function
/M3-GI-SW	Software GVmanager with three phase arbitrary function
/Rack	Rack for built-in mounting (up to 5KVA)
/Rack-V	Rack for vertical built-in mounting (up to 5KVA)
/3-Rack	Cabinet with three phase sources
/LAN	LAN interface
/Rout	Output on the back side
/Fout	Output on the front side
/Sout	Access to particular output (to be specified)
/ATE	Without display
/Cons	Separate control unit (3 mt cable)
/USB	USB interface
/F-I/O	Connections I/O and serial on the front side
/R-I/O	Connections I/O and serial on the back side
/F-ms	Main switch on the front side
/R-ms	Main switch on the back side


### Available design

- Horizontal built-in Rack
- Vertical built-in Rack
- Table Rack
- Wheeled Cabinet
- Cabinet
- Electronics and power separated for mounting on board



## Screens

### Software GVmanager

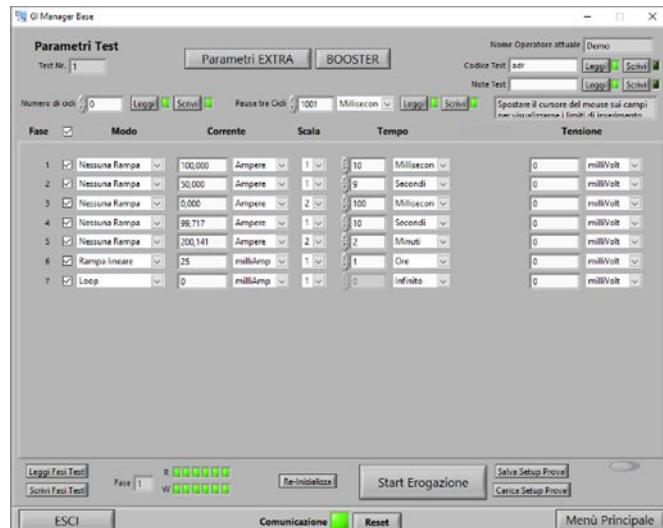

### Other Zenone Elettronica products

- Current Sources GI1K series
- Pulsed Current Sources GI1K xxx SI series
- Single-phase voltage sources GV1K series
- Single-phase voltage sources GTS1K series with bandwidth from DC up to 2.5KHz
- Frequency converters FVC1K three-phase series with high overload and output frequency up to 450Hz
- Fast Power Supplies AL3000 and AL3000R series with voltages from 10V to 1200V, currents up to 10KA and power ratings from 10KW to 1MW
- Fully bidirectional R Models

### ZENONE ELETTRONICA HISTORY

Founded in 1990 in Mirabella Eclano (AV) by a staff with high experience in the power electronics sector, Zenone Elettronica has quickly become a leader in the development and manufacture of power electronics with a high technological level, focusing on testing equipments for measurement laboratories and production lines

### ORDERS INFORMATIONS



Mess- und Prüftechnik. Die Experten.

Ihr Ansprechpartner /  
Your Partner:

**dataTec AG**

E-Mail: [info@datatec.eu](mailto:info@datatec.eu)

[>>> www.datatec.eu](http://www.datatec.eu)