

Ethernet Electrical Testing Software for 5/6 SeriesMSO

Option 5-CMENET/6-CMENET and 5-CMENETML/6-CMENETML Application Datasheet

Get more visibility into your Ethernet designs



**Ihr Ansprechpartner /
Your Partner:**

dataTec AG

E-Mail: info@datatec.eu

>>> www.datatec.eu

Get more visibility into your Ethernet designs with 1000BASE-T/100BASE-TX/10BASE-T PHY Measurement and Analysis on the 5 Series, 6 Series, and 6 Series B MSO. The combination of the oscilloscope, analysis software – Option 5-CMENET/6-CMENET, and a wide range of available analog probes enables you to perform detailed and accurate amplitude and timing measurements on your designs. The 12-bit analog-to-digital converters in the 5/6/6B Series MSO deliver precise measurement data.

Option 5-CMENET/6-CMENET is a standard specific application for Tektronix 5/6 Series and 6 Series B MSO oscilloscopes. This application includes compliance measurements that enable you to achieve new levels of debugging, efficiency, and accuracy. Option 5-CMENET/6-CMENET adds a long list of IEEE 802.3 and ANSI X3.263 specific measurements for different Ethernet standards to the standard jitter, timing, and signal quality measurements in the 5/6 Series MSO oscilloscopes.

Key features

- Comprehensive Ethernet PHY test coverage supporting multiple speeds.
- Highly optimized and intuitive user interface for quick test configuration and validation of electrical signals.
- Compliance and margin testing for accurate analysis and improved interoperability.
- Time-domain and frequency-domain measurements made with a single instrument.
- Jitter and timing measurements with and without filters.
- Amplitude and droop testing for transmitter performance.
- Detailed test reports with results, pass/fail info, test margin, and test specific waveform images.
- Configure test parameters and limits for debug and characterization.
- Configure multiple test runs and analyze the results.
- Preview the test mode waveform before running the tests.
- Additional *Peak Distortion Vs Phase Offset* and *Error Values Vs Symbol Number* plots for 1000BASE-T distortion tests.

Ethernet compliance testing has some unique measurement challenges:


- Generating the disturbing signals requires you to generate pattern data and noise to create real-world noise for some measurements.
- You must test amplitude, timing, return loss, and template measurements for the ethernet standards:
 - The 100BASE-TX standard outlines 12 tests per port plus CMRR and more
 - The 1000BASE-T standard calls for 80 tests per port plus BER, CMRR, and more
 - The 10BASE-T standard specifies 22 tests per port plus fault tolerance and CMRR

- Because of the large number of individual tests, compliance testing takes a lot of setup and measurement time, and makes repeatable measurement results difficult to achieve.

Automated Ethernet physical layer compliance testing

Automated TekExpress Ethernet electrical testing with option 5-CMENET/6-CMENET requires an oscilloscope with minimum bandwidth of 1 GHz. This application provides automated compliance testing for Ethernet verification.

Executing all of the measurements manually is extremely time-consuming. TekExpress Ethernet software provides you an automation framework, enabling you to execute all of the measurements with less user intervention, such as when you need to change the connections.

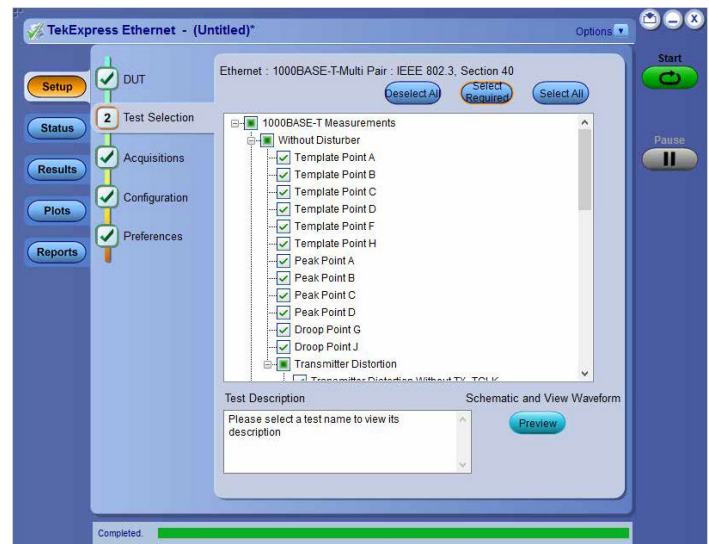


TekExpress Ethernet test selection panel

TekExpress Ethernet software allows you to choose complete or selective testing of any of the transmitter electrical specifications. Tests are configured by following a step-by-step process. The software sets up the oscilloscope and automates the testing, guiding you to accurate and repeatable results. It generates a comprehensive, date-stamped test report with pass/fail results, waveforms, and data plots.

Software navigation follows a logical workflow for quick test setups, changes and review of test results. Valid testing requires proper cabling, probes, and connections between fixtures, instruments, and the device under test (DUT). The software provides setup instructions for each test, with images and reference illustrations showing correct configurations.

TekExpress Ethernet software requires a Tektronix 5/6/6B Series MSO oscilloscope with Option 5-WIN/6-WIN or SUP5-WIN/SUP6-WIN (Microsoft Windows 10). This is a Windows application and the software displays TekExpress Ethernet software and test reports on the oscilloscope display. However, for convenience an external monitor may be connected to the 5/6/6B Series MSO so test controls and


reports can be viewed on the external display, while signal acquisition is observed on the primary oscilloscope display.

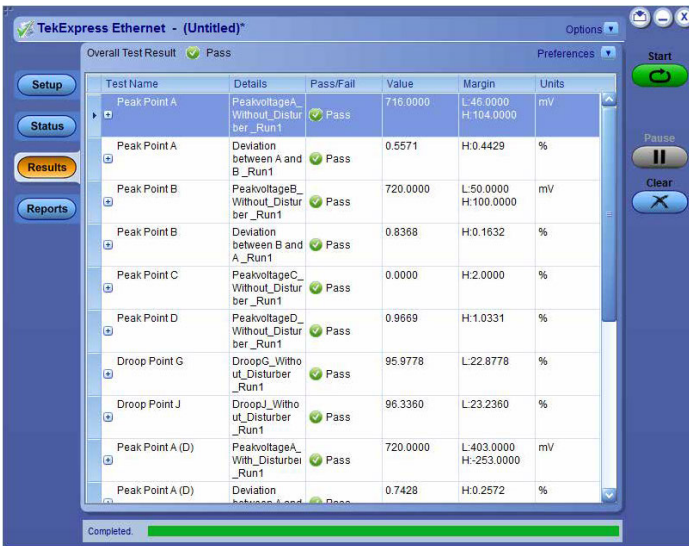


TekExpress Ethernet results panel displaying tests results

1000Base-T-Multi Pair testing

The 1000Base-T consists of four pairs of full duplex signals namely, Pair A, Pair B, Pair C, and Pair D. The compliance testing of the Ethernet testing requires all the four pairs/lanes of signals to be tested for all the parameters listed below the disturbing and non-disturbing options.

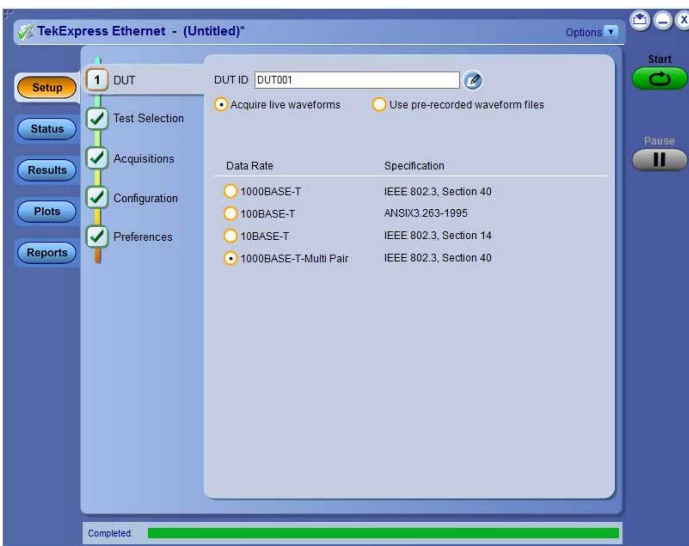


1000Base-T-Multi Pair testing setup

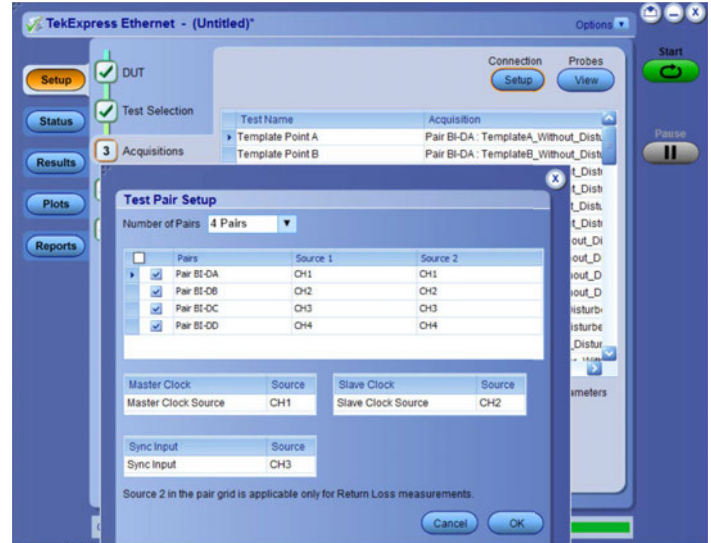

Test pair setup for four pairs

The traditional approach is testing of each pair sequentially. Most systems come with multiple ports. Testing four pairs of signals on each port sequentially can lead to very long test times and subsequently a longer time to market. The new approach tests all four pairs of signals at the same time in the non-disturbing signal mode testing. Parallel testing for pairs in non-disturbing signal mode leads to saving 30 minutes of test time as compared to running a single pair test four times. This leads to saving days of test time in characterization labs and hence, a faster time to market.

The multi-pair top up on 5-CMENET/6-CMENET enables both two pair and four pair parallel testing for non-disturbing signal mode. The two pair testing requires two probes and the four pair option requires four probes. The TC2 section of the TF-GBE-BTP provides parallel access to all the four pairs. The TekExpress application allows both options: Traditional approach of single lane testing and optionally, multi pair.

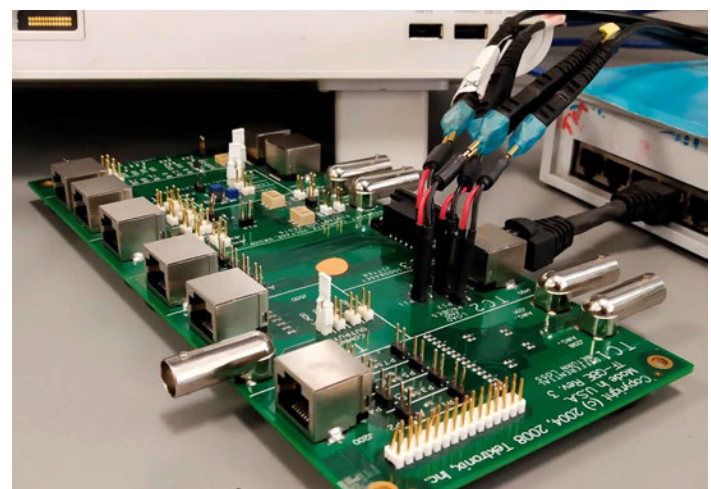

Multi Pair testing

Amplitude tests

The industry standards require the signals to have amplitudes within specified ranges to assure interoperability between devices. The amplitude tests vary with the signal speeds but include such parameters as peak or peak-to-peak amplitude, overshoot, common mode voltage, and positive/ negative pulse symmetry.

Timing tests

Timing parameters of the signals are also specified by the standards. These tests include timing measurements such as rise time, fall time, and difference or symmetry between rise and fall times.


Jitter tests

Jitter tests quantify the timing variations of the edges of the signal, using specified test patterns. These jitter measurements include the


contributions from duty cycle distortion and the baseline wander. Jitter is determined by accumulating waveforms, measuring the width of the accumulated points at the eye crossing. The peak-to-peak is inferred from minimum and maximum values in the tails of the histogram.

Template tests


Template mask tests are often used to quickly verify that the transmitted signal meets industry-standard requirements. These template masks are defined so that signal distortions such as overshoot, jitter, incorrect rise and fall times, etc., will cause the mask test to fail.

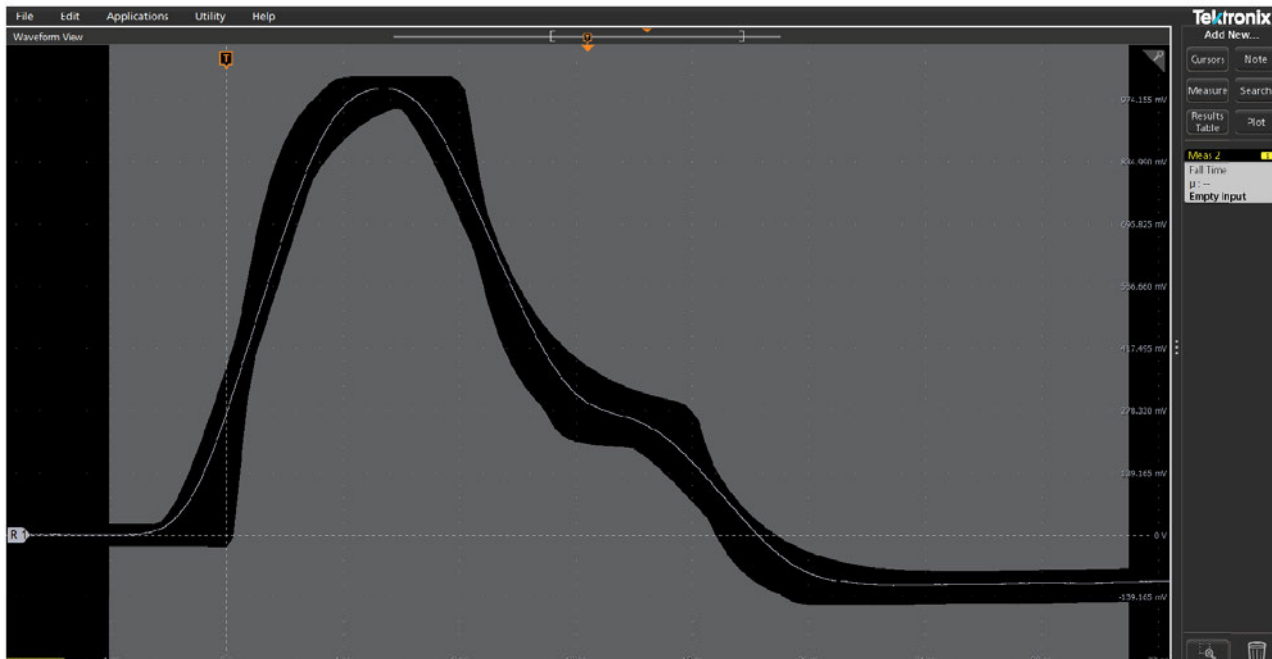

TekExpress Ethernet running 1000BASE-T template measurement

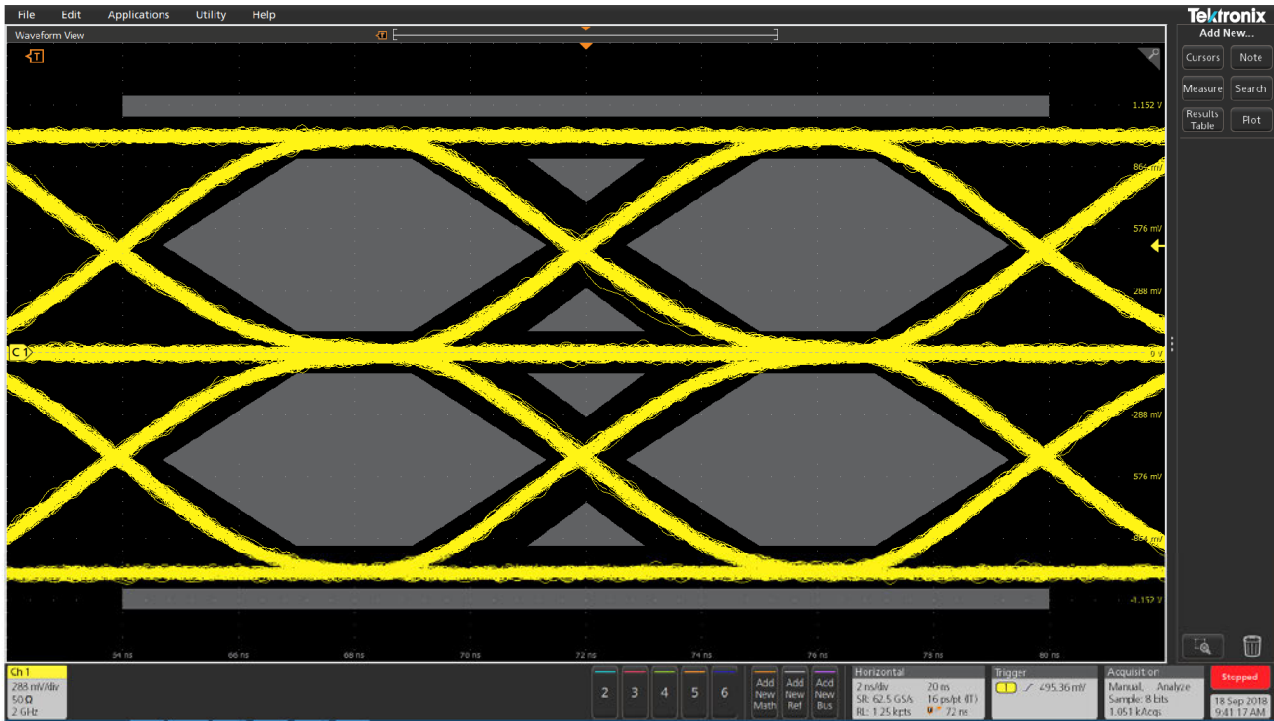

TekExpress Ethernet running 100BASE-T AOI template

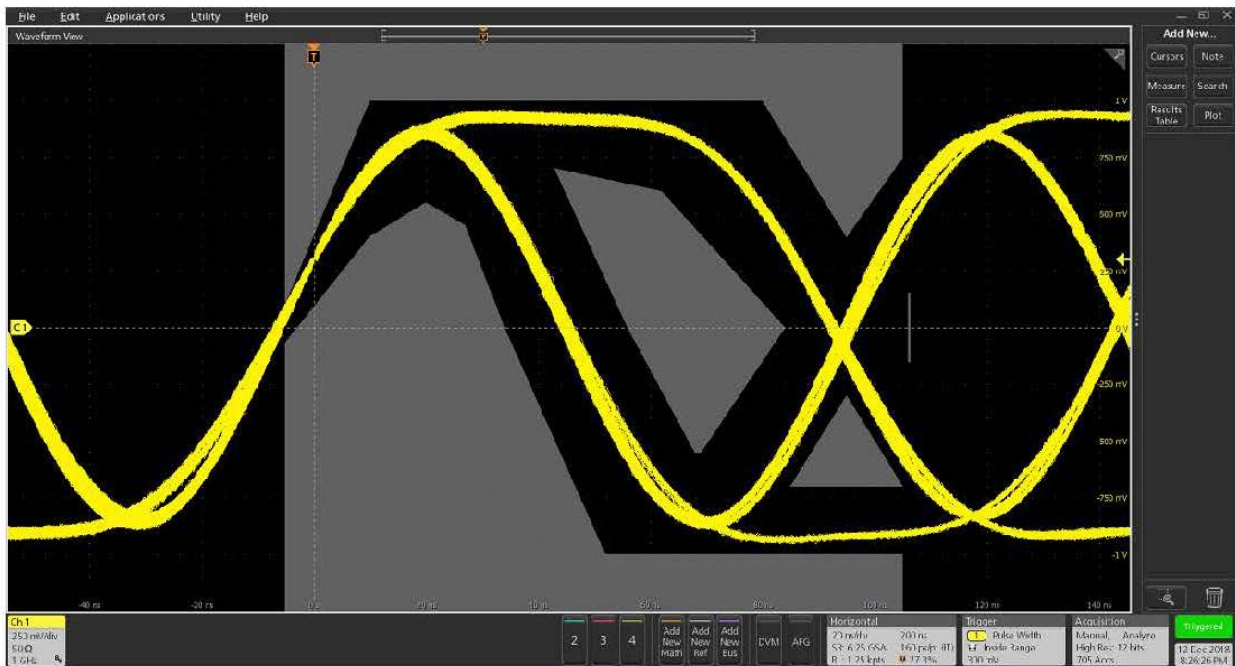


TekExpress Ethernet running 10BASE-T MAU template test

Return Loss test

The return loss of the cabling system can affect interoperability of the system. The Ethernet standard defines the minimum amount of attenuation the reflected signal should have relative to the incident signal. The Return Loss test measures the impedance, typically over the range of $100 \Omega \pm 15\%$. The TekExpress Ethernet ingeniously performs the Return Loss test for 85, 100, and 115 Ω (111 Ω for 10BASE-T) impedances as prescribed by the standard, using the

5/6/6B Series MSO and AFG/AWG series used for other tests, enabling efficient usage of resources.

The TekExpress application enables two ways of testing. One where the AFG/AWG can be used in automated solution and the other where the S-parameter files from a TTR500 can be used for report generation. In the case of AFG/AWG, the application supports return loss testing on upto two pairs at a time. This helps reduce test time by half and thus, saving considerable amount of time.

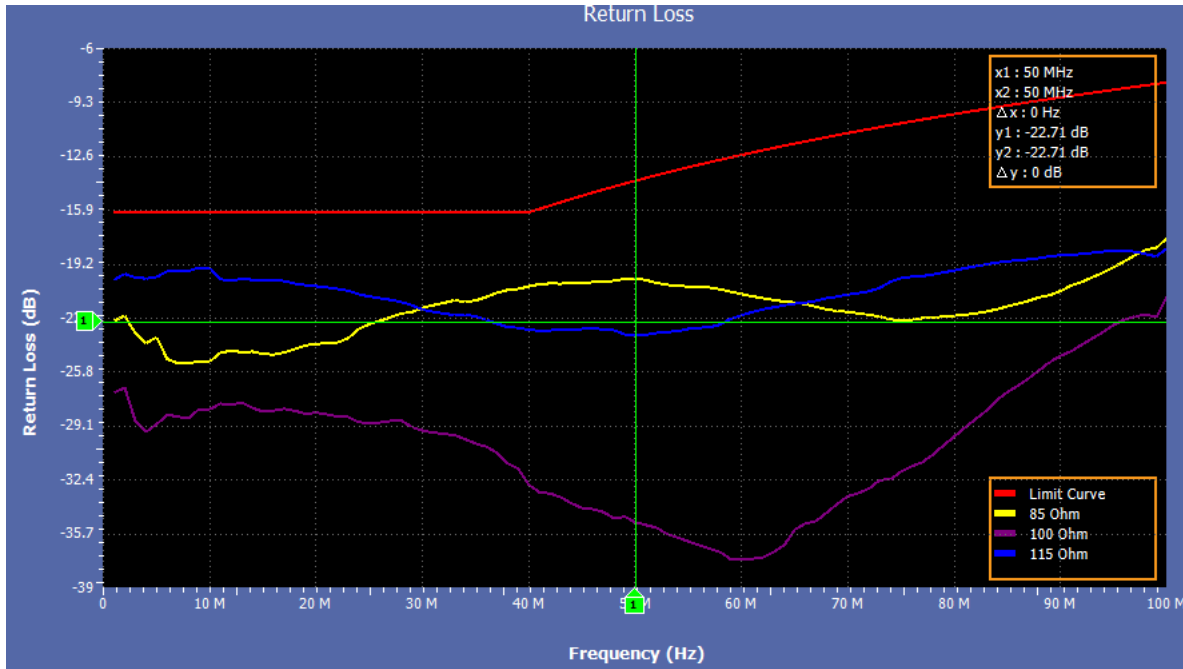

1000BASE-T Return Loss plot

Test report generation

TekExpress Ethernet allows you to quickly validate and generate detailed reports with images and setup details at the end of every execution.


Tektronix
TekExpress Ethernet Tx
1000BASE-T Test Report

Setup Information		Scope Information	
DUT ID	DUT001	Scope F/W Version	MCO38_P0300020
Date/Time	2018-09-25 02:05:58	DATA Probe Model	TDP1500
Device Type	Ethernet Tx	DATA Probe Serial Number	Q100006
TekExpress Ethernet Tx Version	1.0.0.256 (Beta)		
TekExpress Framework Version	4.6.0.38		
Execution Mode	Live		
Compliance Mode	True		
Overall Test Result	Pass		
Overall Execution Time	0:01:54		
DUT COMMENT:	General comment		

Test Name Summary Table	
Template Point A	Pass
Template Point B	Pass
Template Point C	Pass
Template Point D	Pass
Template Point E	Pass
Template Point H	Pass

Template Point A							
Measurement Details	Measured Value	Test Result	Margin	Low Limit	High Limit	Units	Comments
TemplateA_Wisho w_Disturber _Run1	0	Pass	H:0	N.A	0	Hits	Hits in segments: No Hits
COMMENTS							

[Back to Summary Table](#)

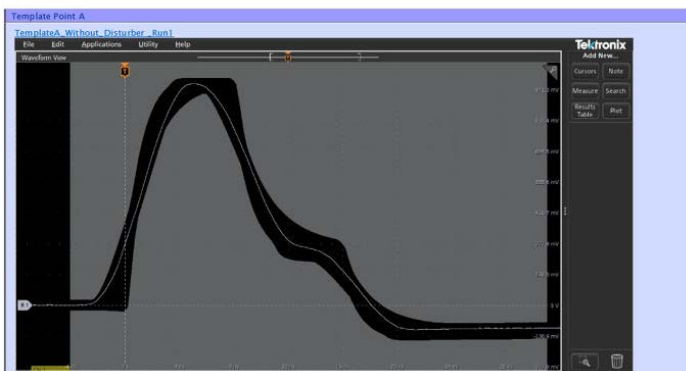

Test fixtures

The TF-GBE Series of test fixtures supports many of the Ethernet compliance tests, providing convenient signal access, test points for accurate removal of disturbing signals, return loss calibration, and cross-connect circuits to connect to traffic generators and link partners. The TF-GBE-BTP is the basic test fixture package for 10/100/1000BASE-T tests. The TF-GBE-ATP is the advanced test fixture package which also includes a 1000BASE-T jitter test channel cable.



TF-GBE-BTP Basic Ethernet Test Fixture.

Key measurements

TekExpress Ethernet Electrical Testing Software provides the following key measurements:

1000BASE-T (available with and without disturbing signal test option)

- With and without disturber
 - Template A
 - Template B
 - Template C
 - Template D
 - Template F
 - Template H
 - Peak A
 - Peak B
 - Peak C
 - Peak D
 - Droop G
 - Droop J
 - Distortion (with and without clock)
- Master Jitter - Filtered and unfiltered (with and without clock)
- Slave Jitter - Filtered and Unfiltered (with and without clock)
- Common Mode Voltage
- Return Loss

100BASE-TX

- AOI Template
- Rise Time
- Fall Time
- Rise/Fall Time Symmetry
- Differential Output Voltage
- Amplitude Symmetry
- Waveform Overshoot
- Duty Cycle Distortion
- Jitter
- Return Loss

10BASE-T

- Link Pulse (With and without TPM)
- TP_IDL (With and without TPM)
- MAU Template
- Harmonics
- Common Mode Voltage
- Differential Voltage
- Jitter
- Return Loss

Ordering information

Required hardware

Oscilloscope	6 Series or 6 Series B MSO oscilloscope with minimum bandwidth of 1 GHz (option 5-BW-1000 or 6-BW-1000) 5-WIN or 6-WIN (Removable SSD with Microsoft Windows 10 operating system)
Supported instruments	MSO54, MSO56, MSO58, MSO64, MSO64B, MSO66B, and MSO68B.

Required software

Application	Options	License type
TekExpress Ethernet (1000BASE-T, 100BASE-TX, 10BASE-T) automated compliance test solution	5-CMENET 6-CMENET	New instrument license
	SUP5-CMENET SUP6-CMENET	Upgrade license
	SUP5-CMENET-FL SUP6-CMENET-FL	Floating license
Multilane Ethernet (1000BASE-T, 100BASE-TX, 10BASE-T) automated compliance test solution	5-CMENETML ¹ 6-CMENETML ¹	New Instrument license Requires 5/6-CMENET
	SUP5-CMENETML ¹ SUP6-CMENETML ¹	Upgrade license Requires 5/6-CMENET
	SUP5-CMENETML-FL ¹ SUP6-CMENETML-FL ¹	Floating license Requires 5/6-CMENET-FL

Recommended probes and accessories

Recommended Probes	5/6-CMENET	5/6-CMENETML
TDP 3500	2 ²	Maximum 8 Probes are required for complete automation of 4 pairs. 6 probes are required for 4 pair jitter tests if TX_TCLK is available. 5/6-CMENETML needs a minimum of 2 probes
TDP 1500	2 ²	
P6247 ³	2 ²	
P6248 ³	2 ²	

¹ 5/6-CMENET is mandatory for all options 5/6-CMENETML.

Recommended test fixtures

Test Fixtures	Vendor
TF-GBE-BTP	Basic Ethernet Test Fixture
TF-GBE-ATP	Advanced Ethernet Test Fixture with Jitter Channel
TF-GBE-JTC	103 meter 1000BASE-T Jitter Test Channel Cable
TF-GBE-SIC	Short (4 inch or 0.1 meter) RJ-45 Interconnect Cable

Supported signal sources (for Disturbing signal and Return Loss testing)

Instrument	Models
Arbitrary Function Generator	AFG31000 Series Two Channels, AFG31252, AFG31152, AFG31102 or AFG3000 Series Two Channels AFG3252
Arbitrary Waveform Generator	AWG5202 with option 250, 2HV and 2DC is recommended for NBaseT (2.5G/5G/10G) compliance testing.



Tektronix is ISO 14001:2015 and ISO 9001:2015 certified by DEKRA.



Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.



Product Area Assessed: The planning, design/development and manufacture of electronic Test and Measurement instruments.

ASEAN / Australasia (65) 6356 3900
 Belgium 00800 2255 4835*
 Central East Europe and the Baltics +41 52 675 3777
 Finland +41 52 675 3777
 Hong Kong 400 820 5835
 Japan 81 (120) 441 046
 Middle East, Asia, and North Africa +41 52 675 3777
 People's Republic of China 400 820 5835
 Republic of Korea +822 6917 5084, 822 6917 5080
 Spain 00800 2255 4835*
 Taiwan 886 (2) 2656 6688

Austria 00800 2255 4835*
 Brazil +55 (11) 3759 7627
 Central Europe & Greece +41 52 675 3777
 France 00800 2255 4835*
 India 000 800 650 1835
 Luxembourg +41 52 675 3777
 The Netherlands 00800 2255 4835*
 Poland +41 52 675 3777
 Russia & CIS +7 (495) 6647564
 Sweden 00800 2255 4835*
 United Kingdom & Ireland 00800 2255 4835*

Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
 Canada 1 800 833 9200
 Denmark +45 80 88 1401
 Germany 00800 2255 4835*
 Italy 00800 2255 4835*
 Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
 Norway 800 16098
 Portugal 80 08 12370
 South Africa +41 52 675 3777
 Switzerland 00800 2255 4835*
 USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tek.com.

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.



**Ihr Ansprechpartner /
Your Partner:**

dataTec AG
 E-Mail: info@datatec.eu
 >>> www.datatec.eu

8 Dec 2022 48W-61490-5
www.tek.com

Tektronix®