

# TDK-Lambda

# HFE1600 Series

## 1600W 1U Front End Power Supplies



Industrial



COTS



Test



COMM



Broadcast



The HFE1600 AC-DC industrial power supplies can be operated in a hot-swap redundant configuration, or used to provide up to 7,600W of bulk power. Up to five power supplies can be fitted in a variety of 19" 1U high racks, for configuration as a single or dual output. The HFE supplies have internal ORing MOSFETs and current share for automatic parallel operation. Communication is possible with the power supplies using the optional isolated PMBus™ (I<sup>2</sup>C) interface or a plug-in LAN module. AC fail, DC good, remote output adjust, remote on/off and a 12V auxiliary output are fitted as standard.

### Features

- Internal ORing MOSFET and Current Share
- Up to 7600W in 1U Rack
- Full Array of Signals Available
- PMBus™ (I<sup>2</sup>C) and LAN options
- Analog Output Adjustment

### Benefits

- Suitable For N+1 Redundancy
- Utilizes Less System Space
- Easy Remote Monitoring
- Industry Standard Communication Interfaces
- Simple External Resistance or Voltage Connection

### Model Selector

Model	Output Voltage (V)	Adjustment Range (V) <sup>(1)</sup>	Max Current (A) (100≤Vin≤132Vac) <sup>(2)</sup>	Max Power (W) (100≤Vin≤132Vac) <sup>(2)</sup>	Max Current (A) (Vin≥170Vac) <sup>(2)</sup>	Max Power (W) (Vin≥170Vac) <sup>(2)</sup>
HFE1600-12	12	9.6 - 13.2	100	1200	133	1596
HFE1600-24	24	19.2 - 29	50	1200	67	1608
HFE1600-32	32	25.6 - 38.4	37.5	1200	47	1504
HFE1600-48	48	38.4 - 58	25	1200	33	1584

<b>HFE1600-</b>	<b>12</b>	<b>/</b>	<b>S</b>
	Output voltage 12, 24, 32, 48		blank No PMBus™ / I <sup>2</sup> C S PMBus™ / I <sup>2</sup> C interface

### Model Selector (Racks and LAN)

Model	Description	Maximum Rack Current
HFE1600-S1U	Five slot 19" rack, IEC320-C16 input connectors (5)	266A each side (532A total)
HFE1600-S1U-TB	Five slot 19" rack, terminal block input connectors (5)	266A each side (532A total)
HFE1600/BP	One slot blanking panel, four provided with each rack	-
HFE/C15U	AC Power cord, 2.0m long, one per power supply required	-
HFE1600-D1U	Four slot (two isolated pairs), dual output 19" rack, IEC320 input	266A each side (532A total)
HFE1600-D1U-TB	Four slot (two isolated pairs), dual output 19" rack, terminal block input	266A each side (532A total)
HFE1600-LAN	Plug in LAN module. Takes up one rack slot. For use with /S power supplies only.	-

Specifications					
Model	HFE1600-12		HFE1600-24	HFE1600-32	HFE1600-48
<b>Input</b>					
Input Voltage range (2)	Vac	85 - 265			
Input Frequency	Hz	47 - 63			
Input Current (Max) 115/230Vac	A	12.4 / 8.1			
Inrush Current	A	<35			
Leakage Current	mA	Less than 0.75/1.5mA at 100/230Vac, 60Hz			
Power Factor Correction	-	EN61000-3-2, PF >0.98 at full load			
Harmonic Compliance	-	Meets IEC61000-3-2			
Hold up time	ms	>10ms, 100/230Vac input, 80% loading			
Efficiency (4)	%	87 / 90	88 / 90	88 / 90	89 / 92
Conducted & Radiated EMI	-	EN55022 & FCC part 15; Conducted class B, Radiated class A			
Line Dip	-	Complies with SEMI F47 (200Vac line only)			
Immunity	-	See immunity section			
Safety Certifications and Markings	-	IEC/UL/CSA/EN62368-1, 60950-1, CE Mark and UKCA Mark			

Immunity				
Test	Standard	Test Level	Criteria	Notes
ESD	EN61000-4-2	2,3	B	-
Radiated Susceptibility	EN61000-4-3	2	A	-
Electrical Fast Transient Burst	EN61000-4-4	2	B	-
Surge	EN61000-4-5	3,4	B	-
Conducted Susceptibility	EN61000-4-6	2	A	-
Magnetic Fields	EN61000-4-8	4	A	-
Voltage Dips and Input Interruptions	EN61000-4-11	>95% for 0.5 cycles	B	-
		30% for 25/30 cycles	C	-
		>95% for 250/300 cycles	C	-

Specifications					
Model	HFE1600-12		HFE1600-24	HFE1600-32	HFE1600-48
<b>Output</b>					
Line Regulation	mV	30	60	80	120
Load Regulation	mV	60	120	160	240
External Load Capacitance	uF/A	1000			
Ripple & Noise (1)	mV	240	240	320	480
Temperature Coefficient	%/°C	<0.02			
Minimum Load	-	No minimum load required			
Overcurrent Protection	%	85V ≤ Vin < 132Vac: Minimum 105% of rated output current 170V ≤ Vin < 265Vac: 105~120% of rated output current.			
Overvoltage Protection (1)	%	110% (Tracking). Cycle AC to reset or utilize Remote On/Off			
Overtemperature Protection (1)	-	Shutdown with automatic reset. Warning signal provided.			
Remote Sense Compensation	V/wire	0.25	0.5	0.75	1.0
Remote On/Off	-	Unit ON: 0-0.6V or short, OFF: 2-15V or open circuit			
Remote Adjust	-	By either external 0-5V signal or 1k ohm potentiometer			
AC Fail Signal	-	Open Collector, ON when AC is within 85-270Vac			
DC Good Signal	-	Open Collector, ON when output is above 85 to 95% of setpoint (tracking)			
Auxiliary Output	-	11.2 - 12.5V, 0.5A, 240mV ripple and noise			
Communication	-	Optional isolated PMBus™ (I²C) interface ( /S suffix) or plug-in LAN module. See model selectors			
Indicators	-	DC OK - Green- >90% ±5% of set output voltage; AC OK - Green - 85 to 270Vac ; Green / Red LED			
Parallel Operation (1)	-	Yes, single wire current share, up to 90% accuracy (load dependant), up to 10 units			


Specifications					
Model		HFE1600-12	HFE1600-24	HFE1600-32	HFE1600-48
<b>Environmental</b>					
Operating Temperature	°C	-10 to +50: 100% load; +50 to +60 derate: 2%/°C of load; +60 to +70 derate: 2.5%/°C of load. For models with reverse air contact factory.			
Storage Temperature	°C	-30 to +85			
Humidity (non condensing)	%RH	Operating: 10 - 90, Storage: 10 - 95			
Cooling	-	Internal variable speed fans. Airflow enters from the front. Contact factory for reverse airflow option.			
Altitude	m	3000 max. Derate output current 2%/100m above 2000m.			
Withstand Voltage	-	I/P to O/P 3kVac, I/P to GND 2kVac. O/P to GND: HFE1600-12, -24V, -32V 500Vac, HFE1600-48 2250Vdc 1 min, (POE)			
Isolation Resistance	MΩ	>100 at 25°C, 70%RH & Output to Ground 500Vdc			
Vibration (Non-operating)	-	Meets IEC60068-2-64 (Basic Transportation)			
Shock (Non-operating)	-	Meets IEC60068-2-27 (Basic Transportation)			
<b>Other</b>					
Weight (Typ)	g	Power Supply: 1550, Rack: 4800			
Size (LxWxH)	mm	Power Supply: 300 x 85 x 41; Rack: 365 x 445 x 43.6			
Size (LxWxH)	Inches	Power Supply: 11.8 x 3.35 x 1.61; Rack: 14.4 x 17.5 x 1.72			
PMBus™ / I <sup>2</sup> C Interface (1)	-	Isolated from output, Add suffix /S, PMBus™ compatible			
MTBF - Telcordia	Hours	210,143			
Warranty	Years	Three			

**Notes**


- (1) See installation manual for detailed specifications and test methods
- (2) Derate output power linearly 1%/V from 100Vac to 85Vac input
- (3) Reverse air - contact factory
- (4) At 75% load, 115 / 230Vac input




## Outline Drawing HFE1600-S1U-TB

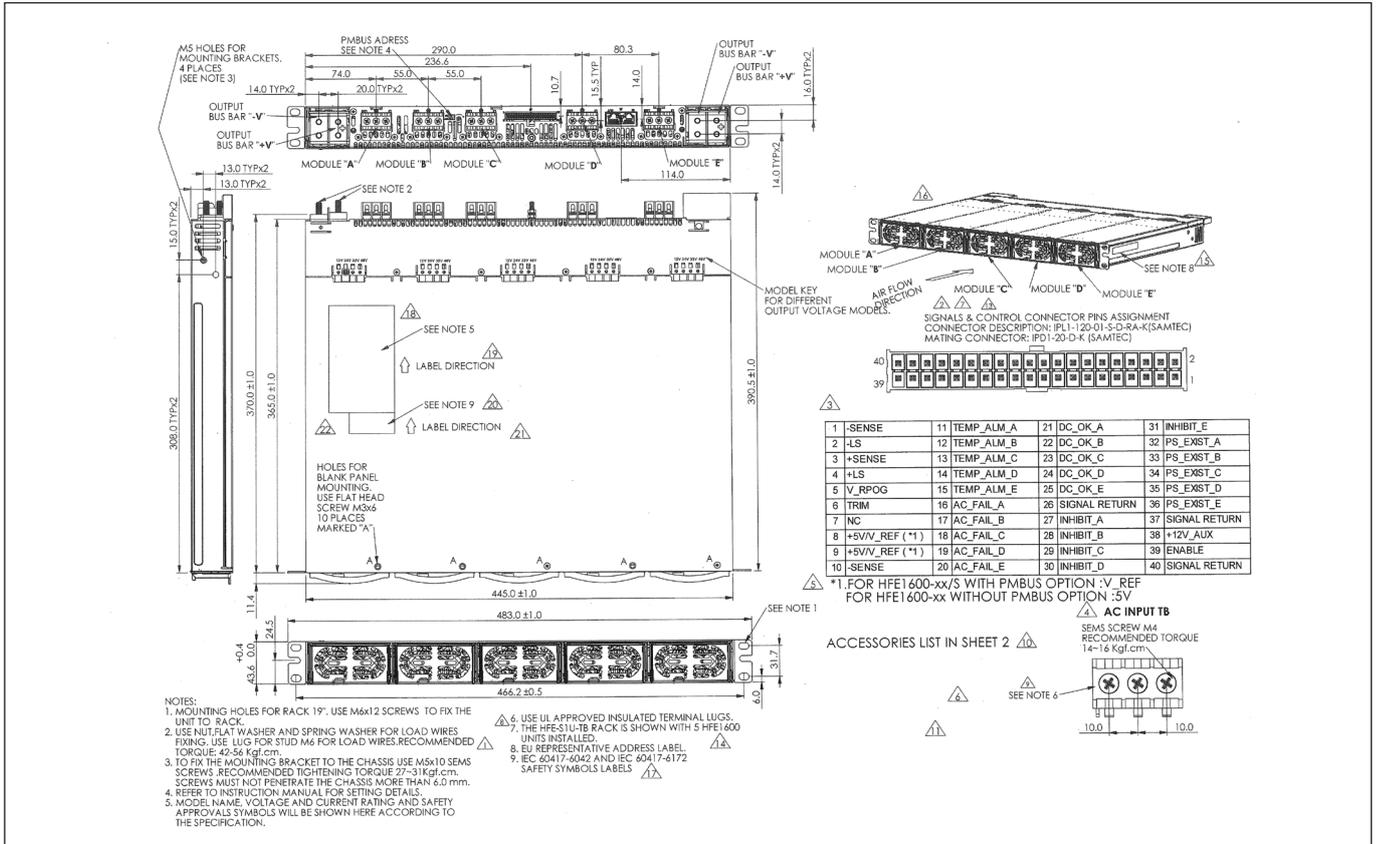


## Outline Drawing HFE1600-D1U

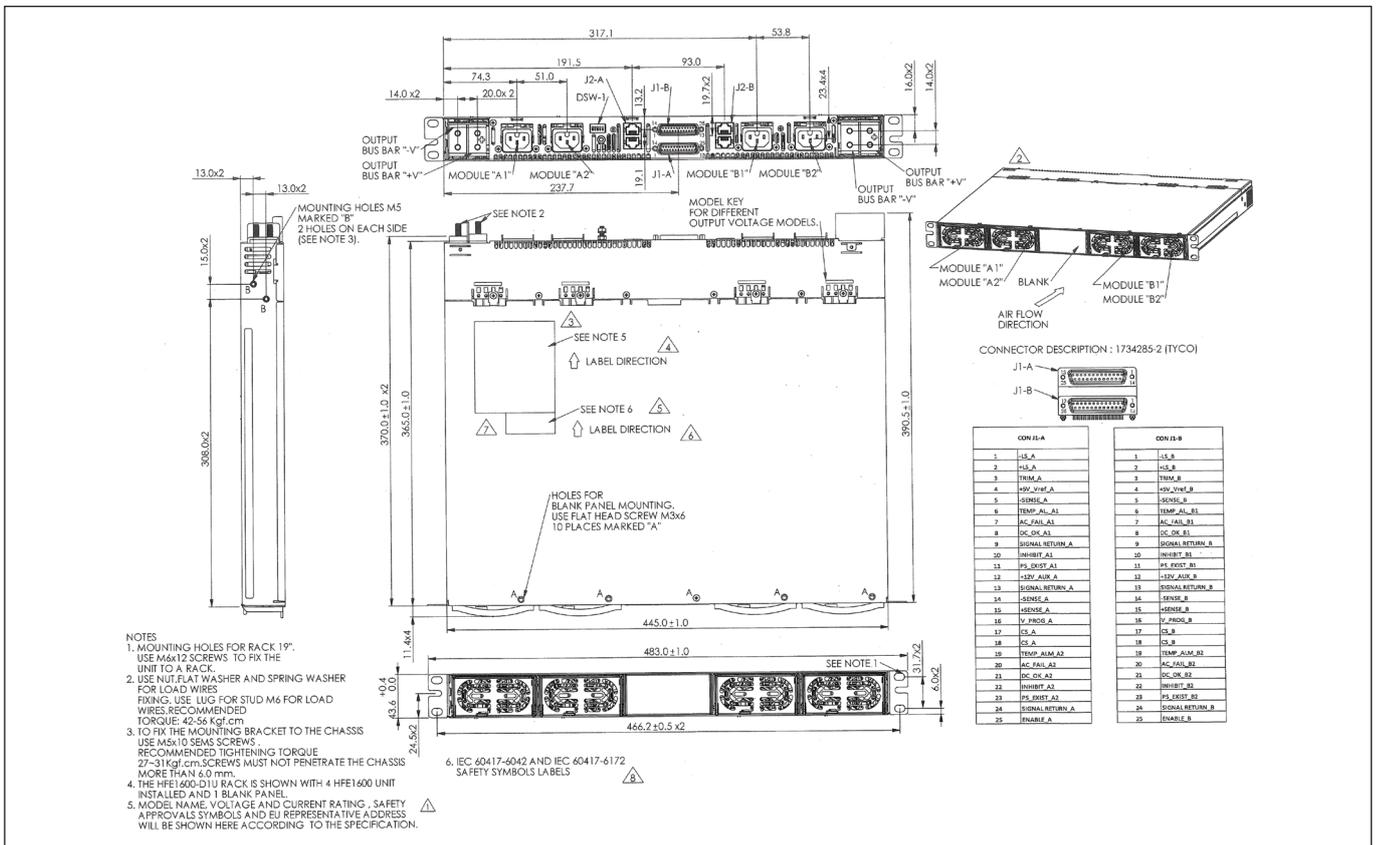

**Outline Drawing HFE1600-D1U-TB**

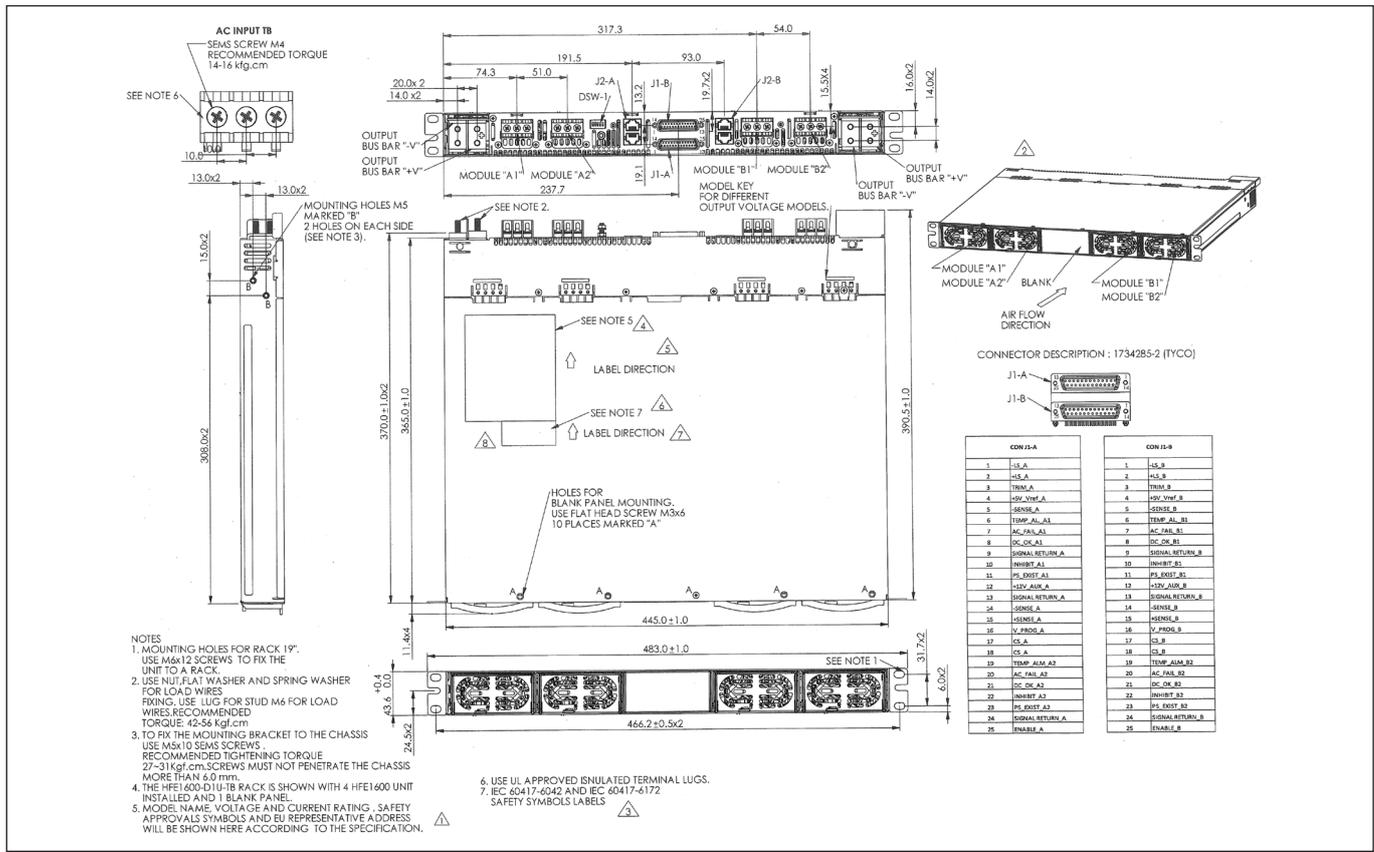

**Outline Drawing HFE1600-LAN**

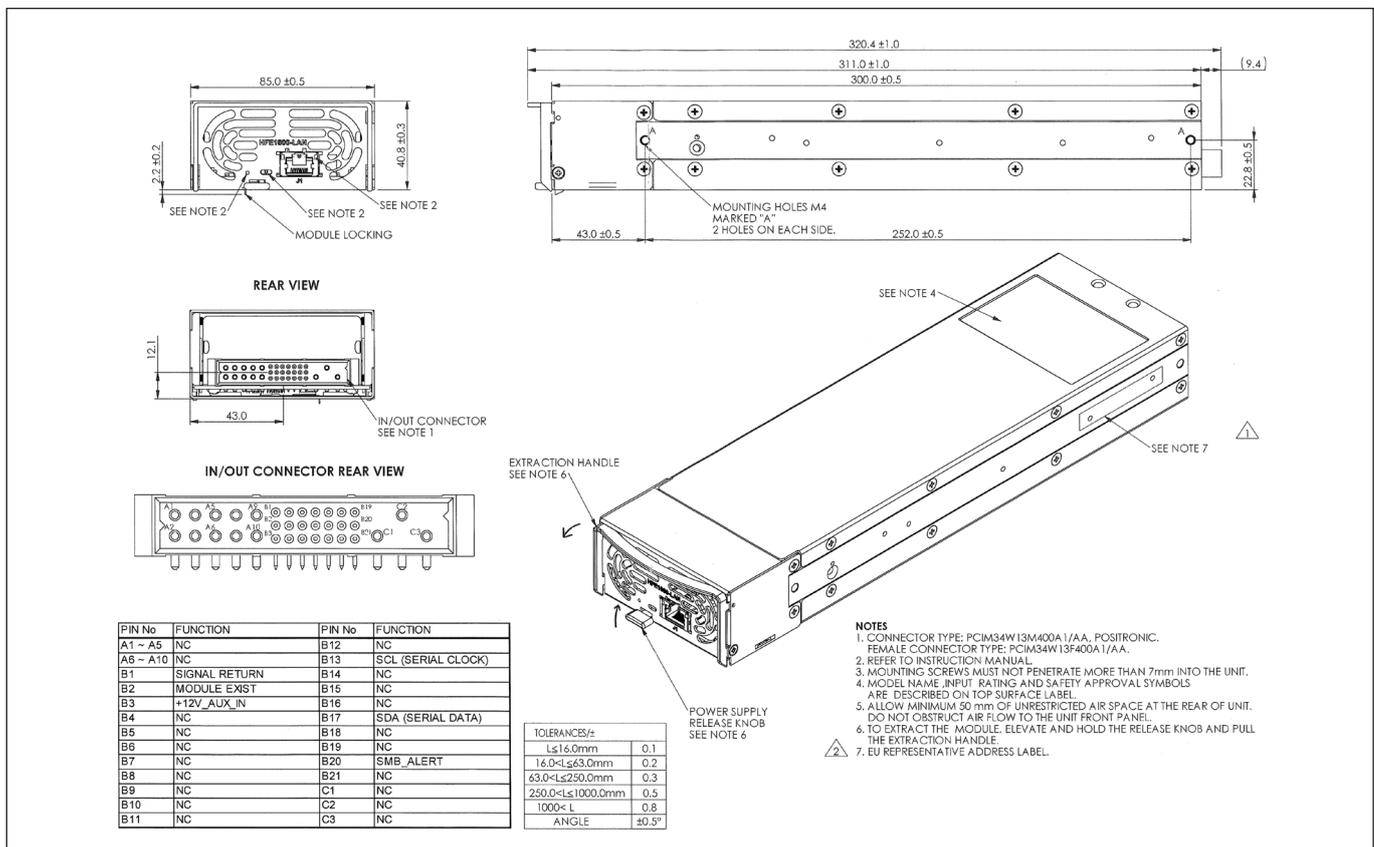



## TDK-Lambda France SAS

Tel: +33 1 60 12 71 65  
tif.fr-powersolutions@tdk.com  
www.emea.lambda.tdk.com/fr



## TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324  
tia.powersolutions@tdk.com  
www.us.lambda.tdk.com



## Italy Sales Office

Tel: +39 02 61 29 38 63  
tif.it-powersolutions@tdk.com  
www.emea.lambda.tdk.com/it



## TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599  
sales.br@tdk-electronics.tdk.com  
www.tdk-electronics.tdk.com/en



## Netherlands

tif.nl-powersolutions@tdk.com  
www.emea.lambda.tdk.com/nl



## TDK-Lambda Corporation

Tel: +81-3-6778-1113  
www.jp.lambda.tdk.com



## TDK-Lambda Europe GmbH

Tel: +49 7841 666 0  
tlg.powersolutions@tdk.com  
www.emea.lambda.tdk.com/de



## TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777  
tlc.powersolutions@tdk.com  
www.lambda.tdk.com.cn



## Austria Sales Office

Tel: +43 2256 655 84  
tlg.at-powersolutions@tdk.com  
www.emea.lambda.tdk.com/at



## TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211  
tts.marketing@tdk.com  
www.sg.lambda.tdk.com



## Switzerland Sales Office

Tel: +41 44 850 53 53  
tlg.ch-powersolutions@tdk.com  
www.emea.lambda.tdk.com/ch



## TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660  
mathew.philip@tdk.com  
www.sg.lambda.tdk.com



## TDK-Lambda Europe GmbH

Tel: Tel. +45 3222 8086  
tlg.dk-powersolutions@tdk.com  
www.emea.lambda.tdk.com/dk



## TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66  
tlu.powersolutions@tdk.com  
www.emea.lambda.tdk.com/uk



## TDK-Lambda Ltd.

Tel: +9 723 902 4333  
tli.powersolutions@tdk.com  
www.emea.lambda.tdk.com/il-en



**Ihr Ansprechpartner /  
Your Partner:**

**dataTec AG**

E-Mail: [info@datatec.eu](mailto:info@datatec.eu)

>>> [www.datatec.eu](http://www.datatec.eu)

Mess- und Prüftechnik. Die Experten.

HFE1600\_Datasheet\_260824 April 7th, 2025 V3