



Mess- und Prüftechnik. Die Experten.

Ihr Ansprechpartner / **dataTec AG**
 Your Partner: E-Mail: info@datatec.eu
 >>> www.datatec.eu



FLIR E8 Pro

P/N: 13303-0302

Copyright

© 2023, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: 13303-0302
 Commit: 93759
 Language: en-US
 Modified: 2023-10-23
 Formatted: 2023-10-23

Website

<http://www.flir.com>

Customer support

<http://support.flir.com>

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



Imaging and optical data	
IR resolution	320 × 240 pixels
Thermal sensitivity/NETD	<0.04°C (0.07°F) / <40 mK at 30°C (86°F)
Field of view (FOV)	33° × 25
Minimum focus distance	0.36 m (1.18 ft.)
Spatial resolution (IFOV)	1.8 mrad
F-number	1.4
Image frequency	9 Hz
Focus	Fixed focus
Detector data	
Detector type	Focal plane array (FPA), uncooled microbolometer
Spectral range	7.5–13 μm
User interface	
Display	3.5 in. 640 × 480 color LCD
Touch screen	Capacitive touch
Text	Text annotation on image using onscreen keyboard
Flashlight	Manually activated bright LED
Image presentation	
Display	3.5 in. 640 × 480 color LCD
Image adjustment	Automatic/Manual
Image presentation modes	
Image modes	Thermal MSX, Thermal, Picture-in-Picture, Digital camera.
Multi Spectral Dynamic Imaging (MSX)	IR image enhanced with visible camera detail
Picture in Picture	IR area on visual image

FLIR E8 Pro

P/N: 13303-0302

© 2023, FLIR Systems, Inc.

#13303-0302; r. 93759; en-US

Measurement	
Camera temperature range	<ul style="list-style-type: none"> -20 to 200°C (-4 to 392°F) 10 to 550°C (50 to 1022°F)
Object temperature range and accuracy (for ambient temp. 15 to 35°C (50 to 95°F) and object temp. above 0°C (32°F))	<ul style="list-style-type: none"> Range -20 to 200°C (-4 to 392°F): <ul style="list-style-type: none"> 0 to 100°C (32 to 212°F): ±2°C (±3.6°F) 100 to 200°C (212 to 392°F): ±2% Range 10 to 550°C (50 to 1022°F): <ul style="list-style-type: none"> 10 to 100°C (50 to 212°F): ±2°C (±7.2°F) 100 to 550°C (212 to 1022°F): ±2%
Measurement analysis	
Spotmeter	Center spot, box with min./max.
Isotherm	Above alarm, Below alarm
Delta T	Yes, NFPA 70B compliant
Emissivity correction	Variable from 0.1 to 1.0
Emissivity table	Emissivity table of predefined materials
Measurements correction	Emissivity, matt/semi-matt/semi-gloss + custom value, reflected apparent temperature, atmospheric compensation
Set-up	
Color palettes	Iron, White hot, Black hot, Rainbow, Arctic, Lava, Rainbow HC
Set-up commands	Local adaptation of units, language, date and time formats
Storage of images	
File formats	Standard JPEG, 14-bit measurement data included
Storage media	Internal memory and onboard FLIR Ignite cloud connectivity (with Wi-Fi)
Digital camera	
Digital camera, resolution	5 MP
Digital camera, FOV	52.7°
Video streaming	
Radiometric IR video streaming	Yes, USB connection
Non-radiometric video streaming	Yes; MSX, Thermal, Visual, Picture in Picture. USB Video Class colorized uncompressed with overlay 9 Hz.
Data communication interfaces	
Interfaces	USB-C: Data transfer to and from PC and Mac device
Wi-Fi	Infrastructure (network)
Radio	
Wi-Fi	<ul style="list-style-type: none"> Standard: 802.11 a/b/g/n Frequency range: <ul style="list-style-type: none"> 2400–2473 MHz 5150–5250 MHz Max. output power: 16 dBm

FLIR E8 Pro

P/N: 13303-0302

© 2023, FLIR Systems, Inc.

#13303-0302; r. 93759; en-US

Power system	
Battery type	Rechargeable Lithium-ion battery
Battery voltage	3.65 V
Battery operating time	4 hours at +25°C (+77°F) ambient temperature and typical use
Charging system	Battery is charged inside the camera or in specific charger.
Charging time	2 hours in charger. 4 hours to 90% capacity in camera.
Power management	Automatic shut-down
AC operation	AC adapter, 100–240 VAC input, 5 VDC output to camera
Battery documents	For documents like MSDS and UN38.3 test reports/summaries, see: https://support.flir.com/resources/msds

Environmental data	
Operating temperature range	–15°C to +50°C (+5°F to +122°F)
Storage temperature range	–40°C to +70°C (–40°F to +158°F)
Humidity (operating and storage)	IEC 60068-2-30/24 h 95% relative humidity
EMC	<ul style="list-style-type: none"> EN 301 489-1 EN 301 489-17 EN 61000-6-2 (Immunity) EN 61000-6-3 FCC 47 CFR Part 15 Class B (Emission)
Radio spectrum	<ul style="list-style-type: none"> ETSI EN 300 328 ETSI EN 301 893 FCC 47 CFR Part 15 C, E RSS-247 Issue 2
Hazardous substances	<ul style="list-style-type: none"> WEEE 2012/19/EU RoHs 2011/65/EU
Shock	25 g (IEC 60068-2-27)
Vibration	2 g (IEC 60068-2-6)
Safety	Camera: <ul style="list-style-type: none"> IEC/EN 62368-1 Power supply: <ul style="list-style-type: none"> IEC/EN 62368-1 UL/J/(AS/NZS) 62368-1 GB 4943
Declaration of conformity	See: https://support.flir.com/resources/DoC

Physical data	
Camera weight, incl. battery	0.590 kg (1.3 lb.)
Camera size (L × W × H)	244 × 95 × 140 mm (9.6 × 3.7 × 5.5 in.)
Color	Black



Mess- und Prüftechnik. Die Experten.

Ihr Ansprechpartner / dataTec AG
Your Partner: E-Mail: info@datatec.eu
>>> www.datatec.eu



FLIR E8 Pro

P/N: 13303-0302


© 2023, FLIR Systems, Inc.

#13303-0302; r. 93759; en-US

Shipping information	
Packaging, type	Cardboard box
List of contents	<ul style="list-style-type: none"> • Infrared camera with battery • Extra battery • Battery charger • Power supply • USB cable • FLIR Thermal Studio Starter • Printed documentation • Hard transport case
Packaging, weight	3.13 kg (6.9 lb.)
Packaging, size	385 × 165 × 315 mm (15.2 × 6.5 × 12.4 in.)
EAN-13	4743254006478
UPC-12	845188029166
Country of origin	Estonia

Supplies & accessories:

- T198528; Hard transport case FLIR Ex series
- T198531; Battery charger incl power supply
- T198532; Car charger
- T198534; Power supply USB-micro
- T198529; Pouch FLIR Ex and ix series
- T198533; USB cable Std A <-> Micro B
- T199362ACC; Battery Li-ion 3.6 V, 2.6 Ah, 9.4 Wh
- T911630ACC; Power supply for camera, 15 W/3 A
- T911689ACC; Pouch for FLIR E-series
- T911093; Tool belt
- T300083; FLIR Thermal Studio Pro, Perpetual license
- T300341; FLIR Thermal Studio Standard, 1 Year Subscription
- T300258; FLIR Thermal Studio Standard, Perpetual license
- T199233; FLIR Atlas SDK for .NET

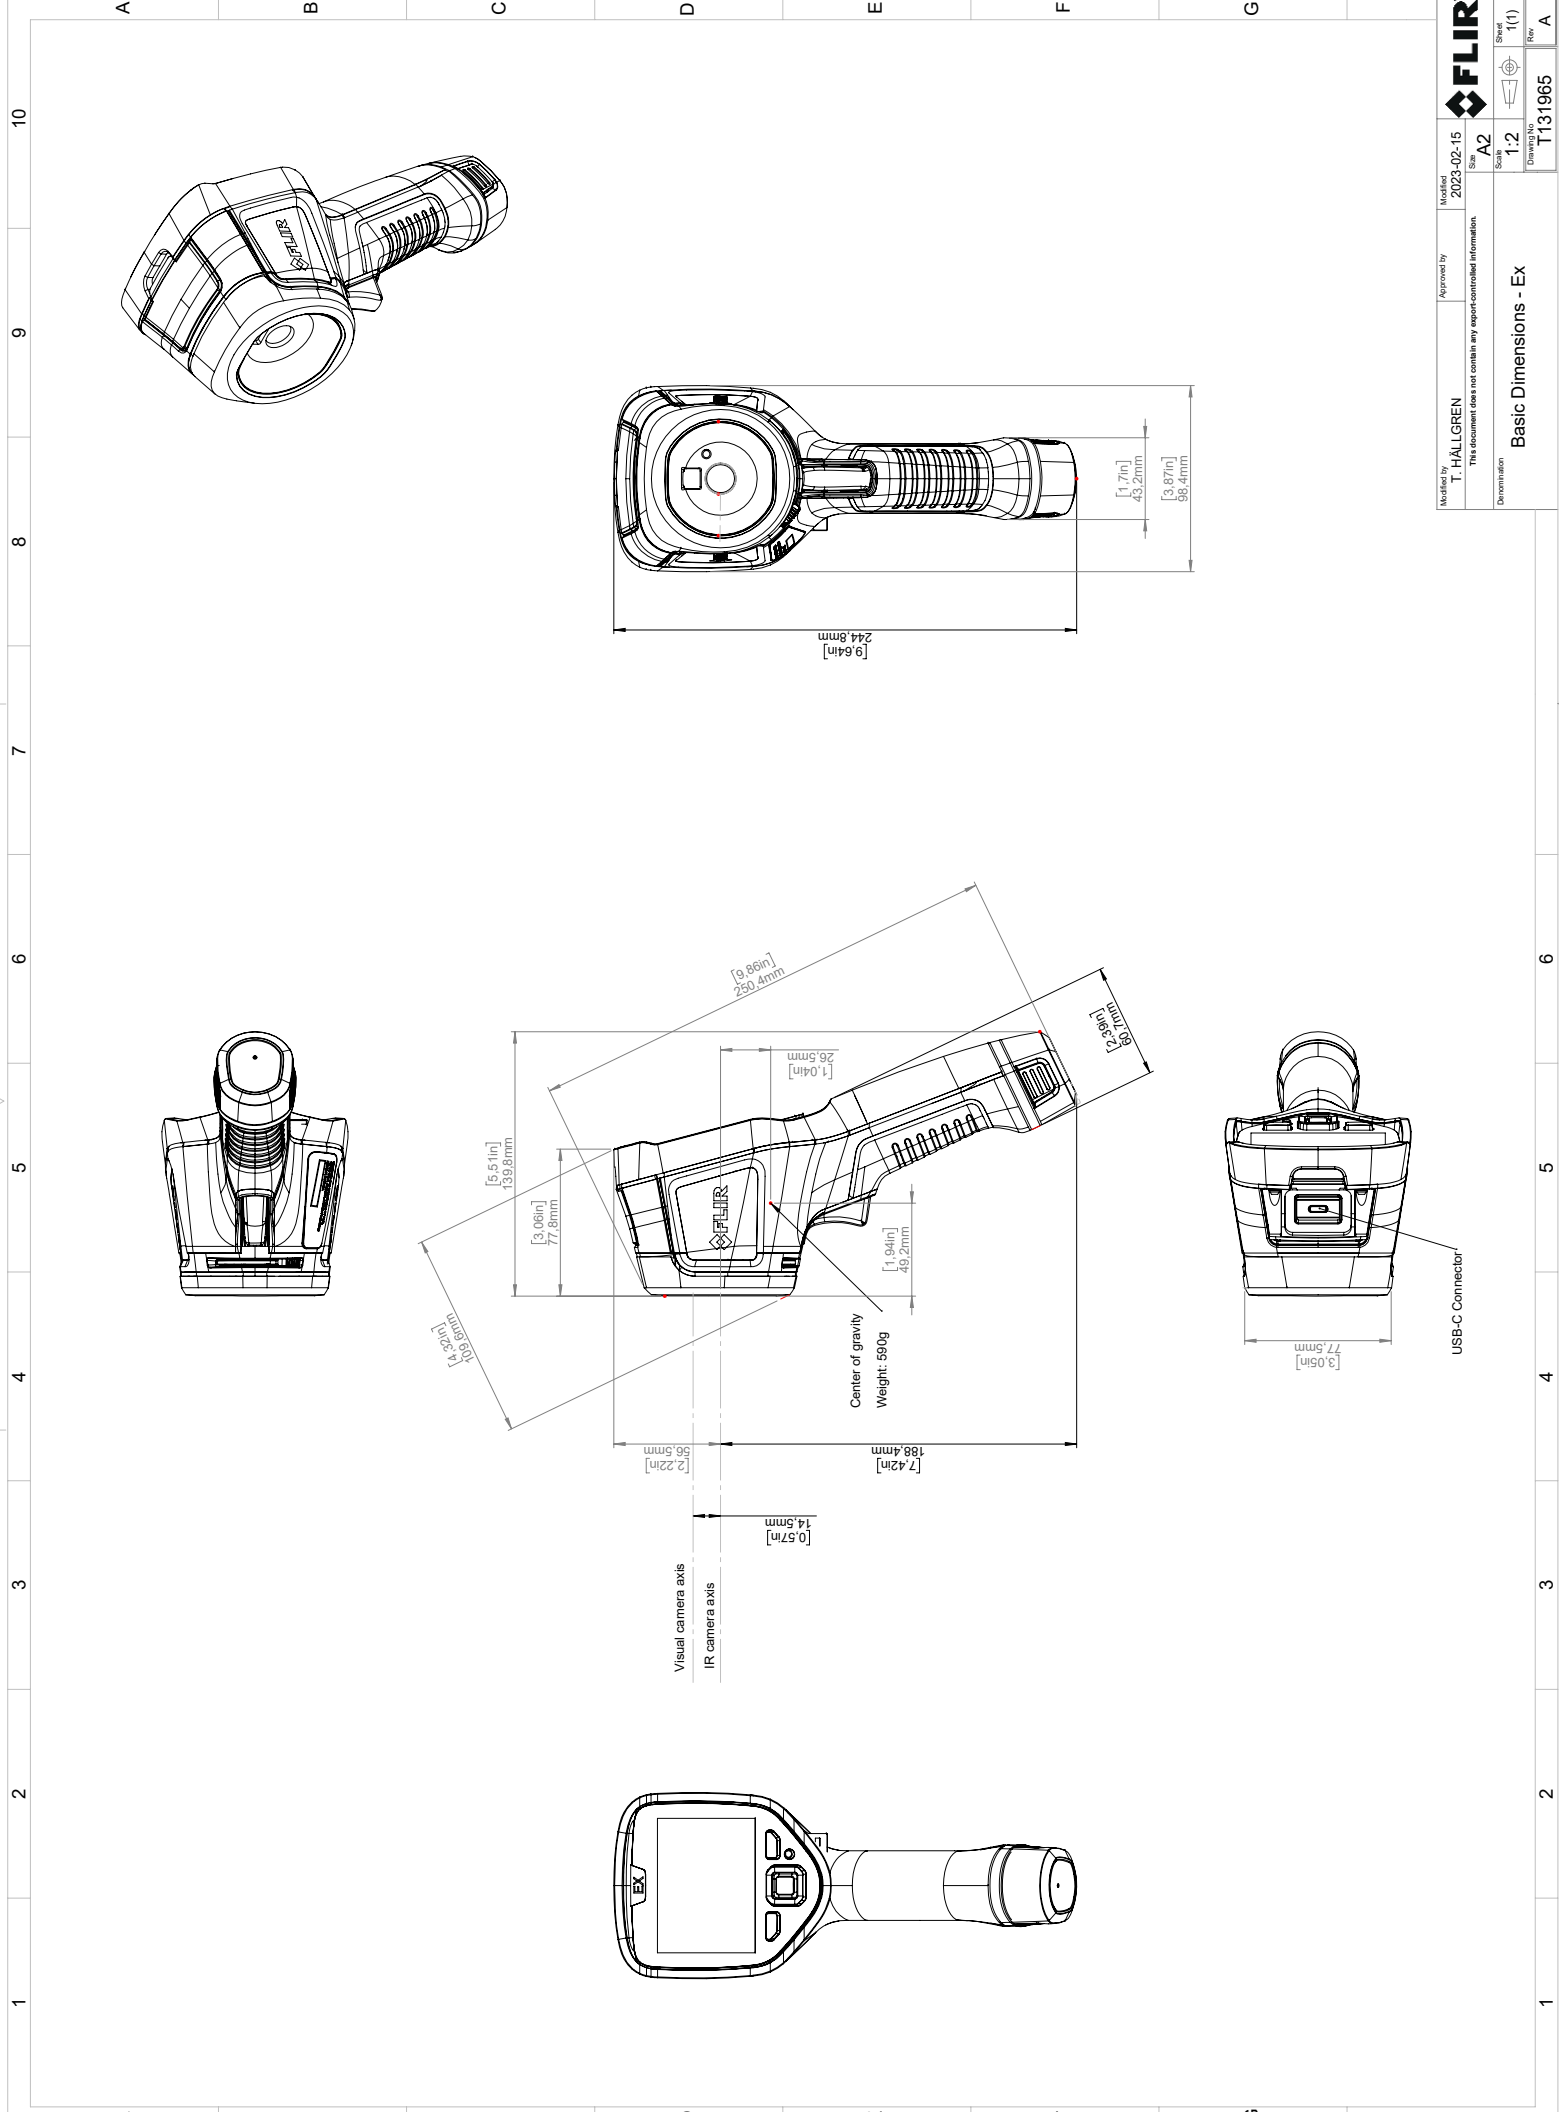

FLIR SYSTEMS AB
 Överstalettið hefur þessa með síðu og gálfandi lag.
 On the other side there are also the drawings.
 This document must not be communicated or
 copied, completely or in part, without our permission.
 Any infringement will lead to legal proceedings.
 FLIR SYSTEMS AB

Modified by	2023-02-15	Approved by	T. HALLGREN
Size	A2	This document does not contain any export-controlled information.	
Scale	1:2	Sheet	1(1)
Drawing No.	T131965	Rev	A
Denotation			
Basic Dimensions - Ex			

USB-C Connector