


High Speed Modular Data Acquisition Recorder

DAS1800

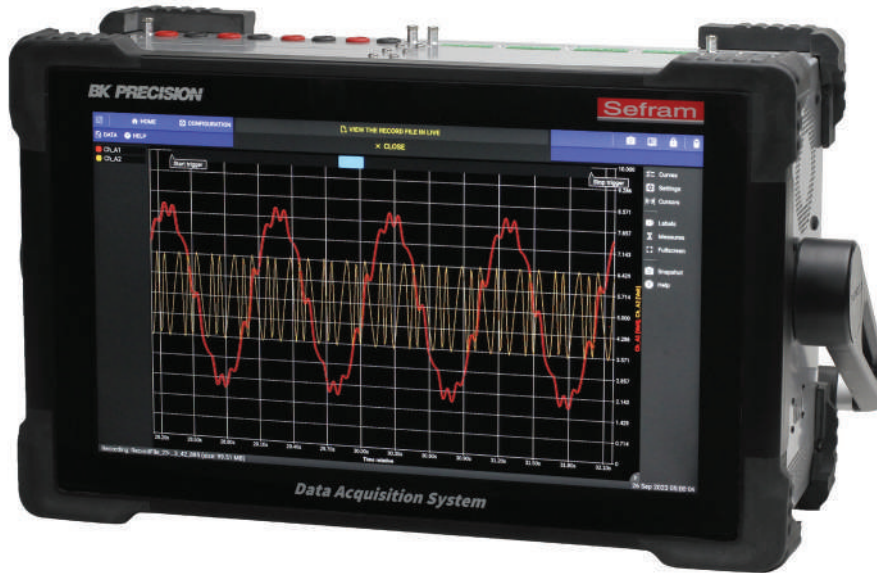

The DAS1800 is a high-speed modular data acquisition system easily configurable to accommodate a wide range applications. With 10 slots for input modules and a plug-and-play design, users can easily achieve optimal setups every time. Select modules as needed to acquire voltage, current, resistance, and temperature measurements.

For high-speed measurements, the D18-UNI4, D18-HVM4, and D18-HIZ4 modules offer 4 channels per module, simultaneous sampling, and sampling rates up to 1 MSa/s/ch. The D18-HVM4 module is also capable of measuring high voltage signals up to ± 1500 VDC or 1000 Vrms with safety ratings for CAT III 1500 V and CAT IV 1000 V. For measuring low voltage and slow-changing trends, the D18-MUX8 provides 8 channels per module, multiplexed sampling, and sampling rates up to 5 kSa/s.

The DAS1800 offers variable sampling rate capabilities, allowing users to efficiently capture transients and trends in the same file without missing or duplicating data. Configure up to four different sampling rates within a single recording. Coupled with advanced triggering and the internal 2 TB solid-state drive, this recorder provides the longest recording time of any data acquisition recorder on the market.

Beyond analog signal acquisition, the DAS1800 also integrates comprehensive power analysis, delivering Class S power quality measurements for DC, single, and 3-phase networks up to 1500 V DC or 1,000 Vrms. This feature measures up to five networks at once and supports 50 Hz, 60 Hz, and 400 Hz systems. Calculate and record power and energy parameters alongside voltage, current, and other analog inputs in real-time.

To gain portability, you don't have to give up features and performance with the DAS1800. The battery-configured base unit weighs about 15 lbs (6.8 kg), making it the lightest all-in-one system in its class, and modules only add around 1.2 lbs (0.55 kg) each. The internal battery option provides up to 3.5 hours of field operation (1.5 hours with 10 D18-UNI4 modules) and the 15.6" Full HD touch screen allows for easy setup and data visualization.

The user interface offers intuitive features like one-finger scrolling and pinch-to-zoom, along with a built-in sensor library and visualization options including real-time waveforms, numeric values, phasor diagrams, and histogram charts. DASpro software is available for PC data viewing, and the DAS1800 supports web server and VNC for remote control.




Features and benefits:

- Stream 40 channels at 1 MSa/s/ch
- Up to 80 analog inputs with D18-MUX8 multiplexed module
- Measure up to ± 1500 VDC
- 10 slots and 4 measurement modules available
 - Universal (4 ch)
 - Multiplexed (8 ch)
 - High Impedance (4 ch)
 - High Voltage (4 ch)
- Temperature measurements with thermocouples and RTDs
- Comprehensive Power Analysis for DC, single-phase, and 3-phase networks operating in 50 Hz, 60 Hz, or 400 Hz
- S class power quality measurements
- Data visuals include real-time waveforms, numeric values, phasor diagrams, and histogram charts
- Synchronize timing with optional IRIG, GPS, and PTP
- Store sensor information and parameters in the sensor library
- Simultaneous recording at multiple sample rates (up to 4)
- Internal signal conditioning with analog and digital filters
- 15.6" Full HD touchscreen display
- 2 TB internal SSD (standard)
- Battery option (up to 3.5 hours of operation)
- 16 digital input channels (24 V) and 4 digital outputs
- Interfaces include USB 3.0 (x2), USB 2.0 (x2), LAN 1 Gbps (x2), and HDMI (x1)
- Rugged carrying case included
- cTUVus certifies CSA and UL safety standard

Applications

- Measure and record up to 80 analog channels
- Monitoring of processes and equipment
- Product validation and verification

Front panel

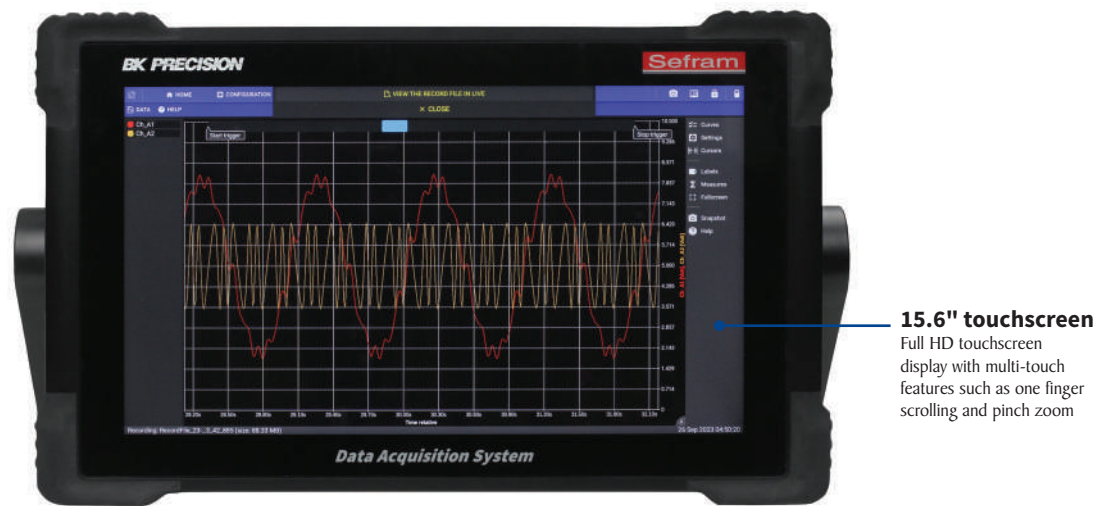


Rear panel

Digital inputs & outputs
Provides 16 digital input channels and 4 digital outputs

Synchronization input
SUB-D 15 HD pin terminal provides start/stop, trigger, and sampling input and outputs

Ground terminal

Power supply outputs
Dedicated outputs provide 3.3 V, 5 V, 12 V, and 24 V with maximum 500 mA

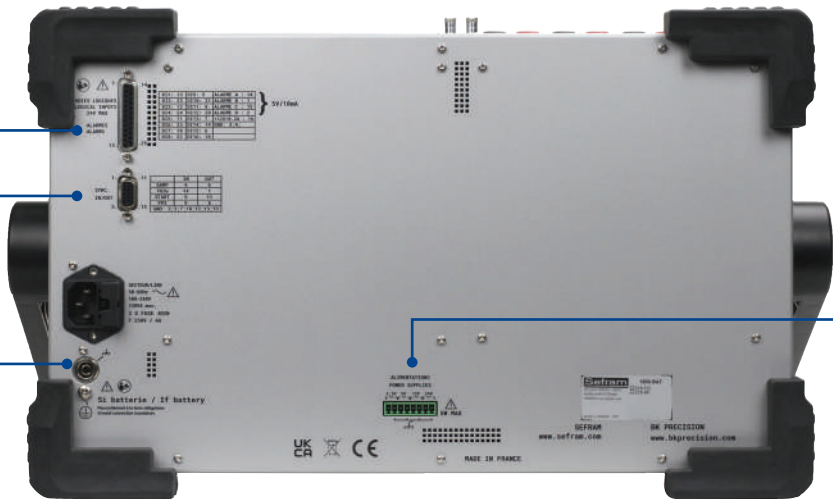

Top panel

Standard 10 module slots
Easily configure system with plug & play modules

LAN
Dual LAN ports for remote control and monitoring

HDMI output
Mirror the DAS1800 screen to an external monitor


Power button



Image displays a DAS1800 configured with 3 universal modules and 3 multiplexed modules.


Operation highlights

Channel configuration

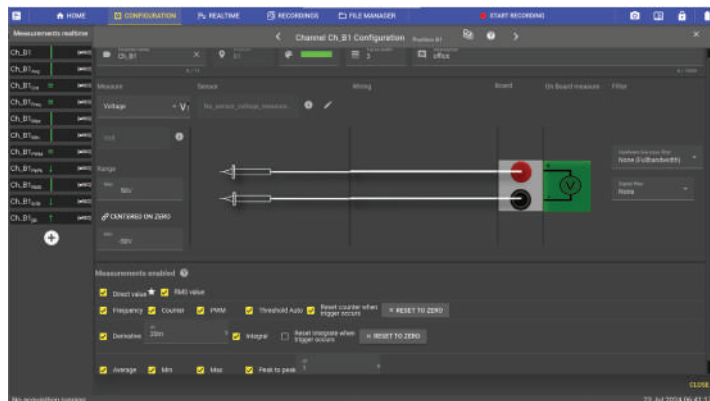


The channel configuration menu offers an intuitive design to ease measurement setup. Additionally, users can record True RMS, frequency, counter, PWM, derivative, integral average, min, max, and peak to peak measurements without the need to use another physical channel.

Custom dashboards

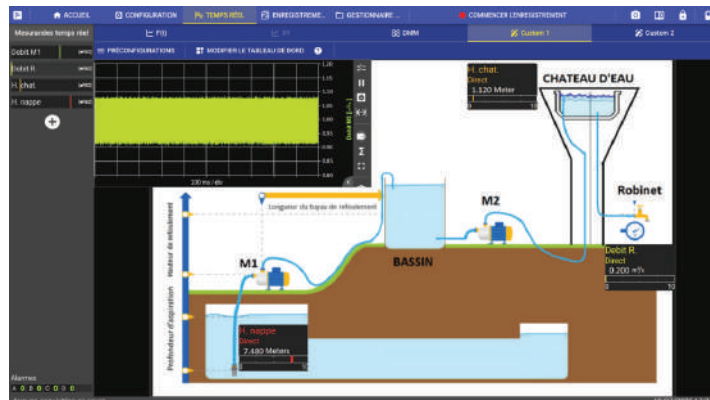


Measure and visualize data as real-time waveforms and numeric values on a customizable dashboard. Import circuit diagrams or system images to display on the dashboard.

Filtering

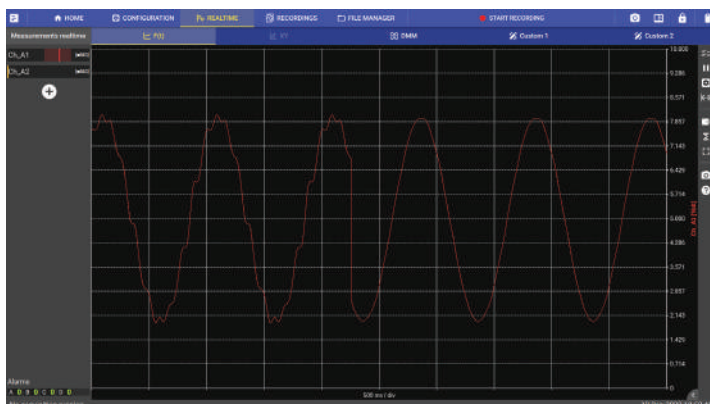


Reduce unwanted noise with built-in analog and digital filters. Analog filters include 100 Hz, 1 kHz, and 10 kHz low-pass filters. Digital filters include high pass, low pass, bandpass, and stop band filtering between 10 mHz to 10 kHz.

Advanced triggering

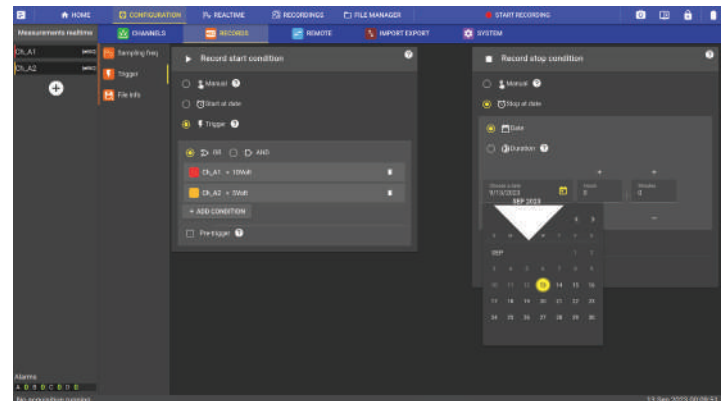


Configure the trigger settings to start and stop acquisition manually, at a specified time, or through a combination of one or multiple channel(s).

Waveform measurements

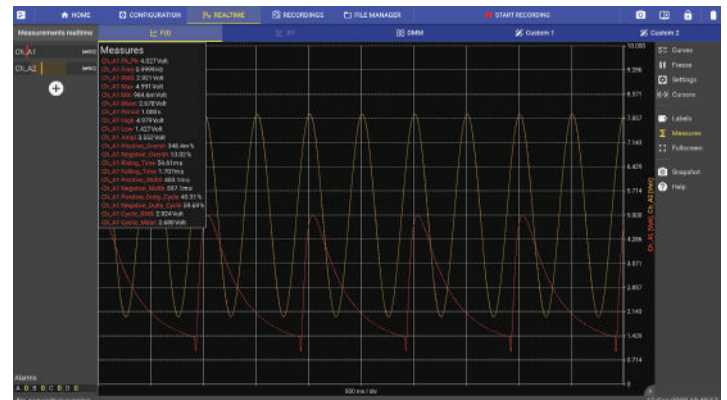

Automatically calculate up to 19 different waveform measurements including, amplitude, RMS, mean, frequency, rise time, and fall time.


Simultaneous recording

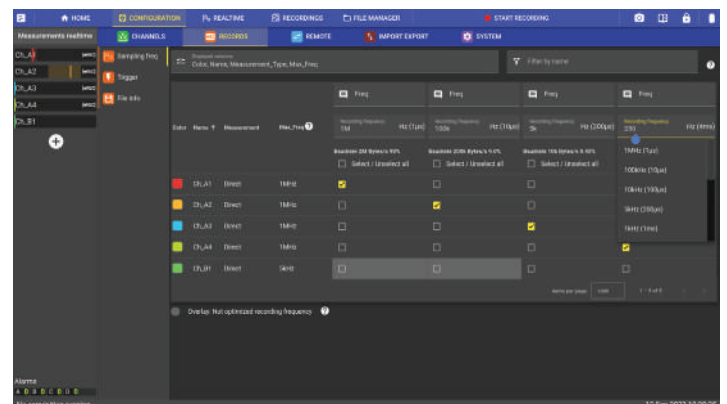

Record data at up to 4 different user configurable sample rates simultaneously. Allocate channels to slower rates or higher rates on a per channel basis for efficient use of hard drive space.


The tools you need

Sensor library

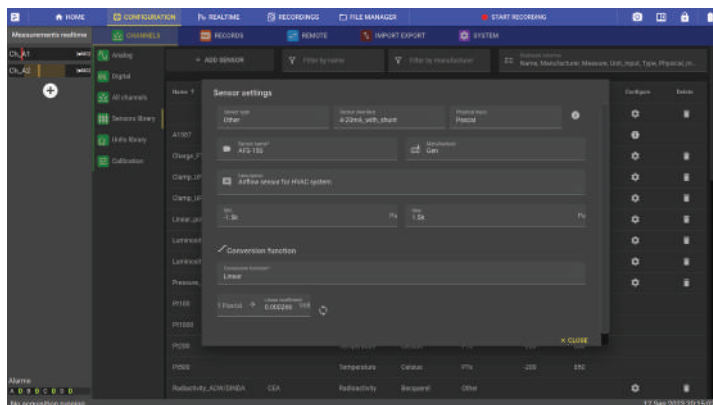

The DAS1800 provides a library of common sensor configurations to facilitate channel setup. Users can also add to the library by creating a new sensor with user-defined parameters including, name, units, and conversion function.


Power analysis

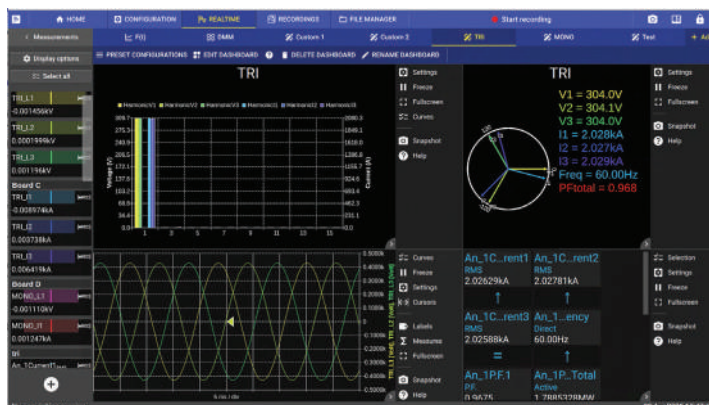

The power analysis feature enables real-time calculation of power and energy parameters and simultaneous recording of the values along with voltage, current, and other analog inputs. Real-time data is displayed in dashboards, which are easy to customize and include phasor diagrams.


Remote connectivity and PC software

DASpro (PC software)

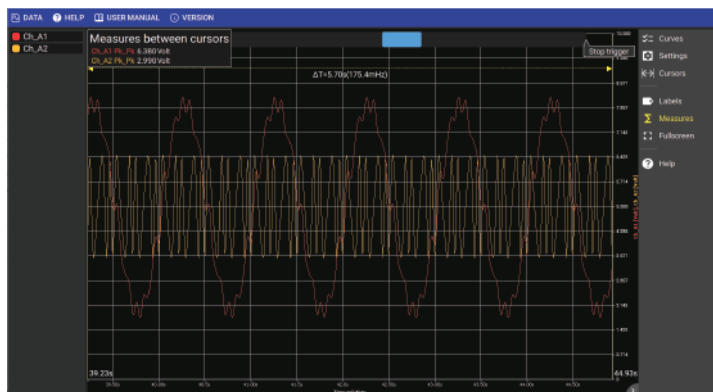

The DASpro software is a license free software that can be downloaded from bkprecision.com. Using this software, users can open and view the universal ASAM MDF4 file recordings saved by the DAS1800. Viewing data and analysis features are similar to the DAS1800, making it easy and intuitive to operate.

Web server

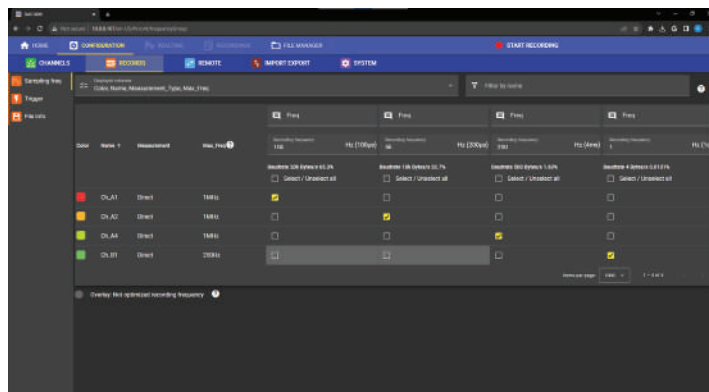

The DAS1800 provides an internal web server for remote access through any device on the same network. Configure instrument channels and trigger parameters, initialize acquisition, and easily save and transfer files to a local storage system.

Virtual Network Computing (VNC) capability


The recorder's built-in VNC provides a graphical desktop system to remotely control the instrument from a computer with a full graphical interface that replaces the instrument's front panel using a mouse and keyboard.

File Transfer Protocol (FTP)

Access remotely the internal hard drive of the recorder to drag and drop the recording files into your desktop.

Measurement Modules

Configure the DAS I 800 to fit your needs with any combination of modules up to 10.



Universal Module



High Voltage Module




High Impedance Module




Multiplexed Module

Measurement Modules				
	Universal	High Impedance	High Voltage	Multiplexed
Channels	4	4	4	8
Maximum Voltage	± 600 VDC	± 600 VDC	± 1500 VDC	± 48 VDC
RMS Voltage	424 VRMS	424 VRMS	1000 VRMS	-
Resolution	16 bit	16 bit	16 bit	18 bit
Sampling Rate	1 MSa/s/ch	1 MSa/s/ch	1 MSa/s/ch	5 kSa/s
Input Impedance	1 MΩ	10 MΩ	10 MΩ	2 MΩ
Input Type	Single ended	Single ended	Differential	Differential
Isolation	✓	✓	✓	-
Voltage	✓	✓	✓	✓
Current	✓	✓	✓	✓
Thermocouples	✓	✓	-	✓
RTDs	-	-	-	✓
Frequency	✓	✓	✓	-
Counter	✓	✓	✓	✓
PWM	✓	✓	✓	-


Included accessories




Bare wire to banana adapter¹
(Set of 4 pairs)




4 pin screw terminal block²
(Set of 8),




Rugged case



SUB-D 25 pin connector for
digital inputs and alarms



SUB-D 15 HD pin connector for
timing and synchronization I/O



8 pin screw terminal block
for power rail supply

Optional accessories



D18-MZ250



D18-UZ001

Current shunts available for banana and 4-pin inputs



D18-RK

Rackmount configured DAS I 800 is available as a factory option

Specifications, base unit

Note: All specifications apply to the unit after a temperature stabilization time of 60 minutes over an ambient temperature range of $23^{\circ}\text{C} \pm 5^{\circ}\text{C}$.

Data Acquisition System		
Recording (files written to SSD)		
Max Sampling Rate ¹	1 MSa/s up to 40 channels	
Recording Groups	4	
Write Speed	120 MB/s (7 GB/min)	
File Format	ASAM MDF4 (.mf4)	
File Size Limit	90% of disk capacity	
At End of Acquisition	Notify, rearm trigger	
Markers	On user action, On event	
Real Time Measure		
Display Mode	F(t)	Roll mode: 100 ms/div to 10 min/div Scope mode: 10 μ s/div to 50 ms/div
	DMM	Acquisition time: 200ms (10 NPLC ² at 50Hz), 2s (100 NPLC ² at 50Hz)
	Record live view	Typical Refresh period 2s, Zoom Mode
	Phasor Diagram	Data sampled at 10 kHz Vector amplitude based on RMS value
	Histogram	50 Hz to 60 Hz: 1 to 50 harmonics 400 Hz: 1 to 10 harmonics
	Custom	Customize up to 10 dashboards with unique widget arrangements Widgets: F(t), Record Live F(t), DMM, Phasor diagrams, Histogram, Images
File Viewer		
Open File Time (typical)	10 sec per 100 GB of file	
Subplot	16	
Cursors	Horizontal, vertical	
Measurements	On the data displayed or between cursors	
	Min, Max, Pk to Pk, Frequency, RMS, Rising time	
Trigger System		
Compute Period	1 μ s	
Source	Analog and logic channel, external source, manual, date/time, delay (on start), duration (on stop), AND/OR combination of channels (128 max)	
On Analog Channel	Edge (rising, falling, both), Threshold (above, below), windows (in, out)	
Pre-trigger	128 M samples	
Post-trigger	1000 s maximum	

Digital I/O	
Input	
Number of Channels	16
Max Voltage	24 V
Threshold	1.2 V to 2.8 V
Sampling Interval	1 μs (1 MSa/s) each channel
Output	
Number of Channels	4
Output Characteristics	TTL 5 V, 10 mA
Trigger Source	Analog/Digital channels, acquisition start/stop, disk full
Power Supply ³	+ 12 V $\pm 5\%$, 200 mA

Power Supply Outputs	
Maximum Power Consumption	5 W
Output Characteristics	+ 3.3 V $\pm 5\%$, 500 mA; + 5 V $\pm 5\%$, 500 mA; + 12 V $\pm 5\%$, 400 mA; + 24 V $\pm 5\%$, 200 mA

Synchronization I/O		
On Synchronization Connector (SUB-D 15 HD pin)		
Input	Signal level	TTL 3.3 V
	External trigger	Pull-up resistor: 10 k Ω , Rising edge sensitive Minimum pulse width: 100 μs
	External start/stop	Pull-up resistor: 10 k Ω , Rising edge sensitive for start Falling edge sensitive for stop Minimum pulse width: 500 ms
Output	Signal	TTL 3.3 V
	Trigger	1 ms positive pulse at trig event
	Start/stop	Set when record is launched

Time Synchronization (optional)	
IRIG Input	IRIG format B122/B126 Time error between reference clock and acquisition clock, $< \pm 10 \mu\text{s}$
GPS Input	Time error between reference clock and acquisition clock, $< \pm 10 \mu\text{s}$
Ethernet PTPV2 IEEE 1588	

Software Feature		
Remote Access	VNC for remote monitoring and control	
	Web server	
	File management	FTP NAS (Network storage for file backup)
	Bench automation	SCPI command port (23 or 5025)
Sensor Library	Predefined sensors and user created	
Date and Time	Manual, NTP	
Software Update	Through web or USB	
Languages	English, French	

(1) For D18-UNI4 and D18-HIZ4 Module

(2) NPLC: Number of power line cycles

(3) Used to power the isolated digital input board

(4) Time with only the 1st frequency group used

Specifications, base unit

Note: All specifications apply to the unit after a temperature stabilization time of 30 minutes over an ambient temperature range of 23 °C ± 5 °C.

Power Analysis					
General					
Network Type	DC; AC: Single-phase (1U/1I), 3-phase delta (3U/3I), 3-phase Wye in 3-wire (3U/3I) and 4-wire (4U/4I)				
Network Frequency	DC, 50Hz, 60Hz, 400Hz				
Sampling Rate	10 kHz				
Number of Networks	5				
Compatible Modules	D18-UNIV4 & D18-HVM4 & D18-HIZ4				
Record File	MDF4				
Calculation Interval					
Network Frequency	1st Interval	2nd Interval	3rd Interval	4th Interval	5th Interval (custom)
DC	200 ms	3 s	10 min	2 h	1 ms to 100 ms
50 Hz	10 periods	150 periods	10 min	2 h	1-2-5 period
60 Hz	12 periods	180 periods	10 min	2 h	1-2-5 period
400 Hz	80 periods	1200 periods	10 min	2 h	1-2-5-10-20-40 period
DC Measurements					
Voltage	Mean, Max, Min, peak-to-peak			0.1% U _{din} ⁽¹⁾	
Current	Mean, Max, Min, peak-to-peak			0.1% I _{din} ⁽²⁾	
Power	Active			0.1% P _{din} ⁽³⁾	
Energy	Active			-	
AC Measurements					
Voltage	Mean, Max, Min, peak-to-peak, RMS, Crest factor			0.1% U _{din} ⁽¹⁾	
	Phase to ref channel			± 0.5°	
Current	Mean, Max, Min, peak-to-peak, RMS, Crest factor			0.1% I _{din} ⁽²⁾	
	Phase			± 0.5°	
	K factor			0.1%	
Power	Active, Reactive, Apparent			0.1% P _{din} ⁽³⁾	
Power Quality	cos (Φ)			± 0.01	
	tan (Φ)			-	
	Φ			± 0.5°	
	PF			± 0.001	
	THD			1.0%	
Energy	Active, Reactive			-	
Voltage Harmonics	50 Hz, 60 Hz: 1 to 50 harmonics			0.1% U _{din} ⁽¹⁾	
	400 Hz: 1 to 10 harmonics				
Current Harmonics	50 Hz, 60 Hz: 1 to 50 harmonics			0.1% I _{din} ⁽²⁾	
	400 Hz: 1 to 10 harmonics				

(1): U_{din}— Nominal network voltage

(2): I_{din}— Nominal network current

(3): P_{din}— Nominal network power (U_{din}*I_{din})

General	
Internal Solid State Memory	2 TB SSD 3D TLC NAND
Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Display	15.6" TFT LCD full HD 1920x1080
Power Supply	110 VAC to 240 VAC ± 10%, 50 to 60 Hz (150 VA max) Protection: Fuse 2 x T4AL250V, 120 VDC to 370 VDC
Interfaces	USB 3.0 (x2), USB 2.0 (x2), LAN 1 Gbps (x2), HDMI (x1)
Battery (optional)	Non removable, Lithium-ion
Battery Life (typical)	3 ½ hrs - One D18-UNI4 module installed 1 ½ hrs - Ten D18-UNI4 modules installed
Weight	15 lbs (6.8 kg) base unit + battery option 1.21 lbs (550 g) each module
Safety	Low Voltage Directive (LVD) 2014/35/EU EN 61010-2010+A1:2019, EN 61010-2-030 (2021+A11/2021) UL/CSA 61010-1, UL/CSA 61010-2-030 UL 61010-1:2012 R6.23, CAN/CSA 61010-1-12 + (R2022 R6.23 UL 61010-2-030:2018, CAN/CSA-C22.2 No. 61010-2-030:18
Electromagnetic Compatibility	EMC directive 2014/53/EU, EN IEC 61326-2-1 (2021) EN IEC 61326-1 (2021), EN 61000-3-2 (2019+A1/2021) EN 61000-3-3 (2013+A1/2019)
Dimensions (WxHxD)	19.1" x 11" x 7.9" (485 x 280 x 200 mm)
Warranty	3 Years
Supplied Accessories	Power cord, SUB-D 25 pin male connector and back shell, SUB-D 15 HD pin male connector and back shell, 8 pin connector, rugged carrying case

Specifications, measurement Modules

Note: All specifications apply to the unit after a temperature stabilization time of 30 minutes over an ambient temperature range of 23 °C ± 5 °C.

Universal Module (D18-UNI4)		
Number of Channels	4	
Input Type	Isolated single ended input - 4mm Banana Plug	
Voltage		
Max. Input Voltage	± 600 VDC or 424 Vrms	
Common-mode Voltage	600 V between track and ground	
Range (19 ranges)	± 500 μV / 1 mV / 2.5 mV / 5 mV / 10 mV / 25 mV / 50 mV / 100 mV / 250 mV / 500 mV / 1 V / 2.5 V / 5 V / 10 V / 25 V / 50 V / 100 V / 250 V / 600 V	
DC Accuracy ¹	≤ ± 25 mV	± 0.1% of full range + 10 μV ²
	± 25 mV to ± 500 mV	± 0.1% of full range + 10 μV
	≥ ± 1 V	± 0.06% of full range
Offset Drift	± 50 ppm/°C ± 1 μV/°C	
Input Impedance	1 MΩ for ranges ≥ ± 1 V, 25 MΩ for ranges ≤ ± 0.5 V	
Input Capacitance	150 pF	
Intrinsic Noise ³ (standard deviation in % of the span)	≤ ± 1 mV	< 0.2%
	± 2.5 mV to ± 10 mV	< 0.1%
	± 25 mV to ± 500 mV	< 0.05%
	≥ ± 1 V	< 0.02%
CMRR	≤ ± 500 mV	> 85 dB
	≥ ± 1 V	> 70 dB
Crosstalk	> -90 dB	
Isolation	CH to CH and CH to GND, > 100 MΩ at 650 VDC	
Safety	CAT III 600 V	
Bandwidth and Filters		
Bandwidth (-3 dB)	≤ ± 2.5 mV	1 kHz
	± 5 mV to ± 25 mV	10 kHz
	± 50 mV to ± 500 mV	60 kHz
	≥ ± 1 V	100 kHz
Analog Filter	2nd Order(-20 dB/dec)	100 Hz, 1 kHz, 10 kHz
Digital Filter	IIR 4th order (-80 dB/dec)	0.01 Hz to 10 kHz
	Type	Low pass, high pass, band pass band stop
	Filter	Butterworth, Bessel, Chebyshev, Inverse Chebyshev, elliptic, Papoulis, Gaussian
Temperature (Thermocouple)		
Compute Frequency	4 ms	
Cold Junction	Uncompensated, internal, external (other channel)	
	Accuracy ⁴ : ± 1.25°C	
Type	J	-210 °C to 1200 °C (-346 °F to 2192 °F)
	K	-250 °C to 1370 °C (-418 °F to 2498 °F)
	T	-200 °C to 400 °C (-328 °F to 752 °F)
	S	-50 °C to 1760 °C (-58 °F to 3200 °F)
	B	200 °C to 1820 °C (392 °F to 3308 °F)
	E	-250 °C to 1000 °C (-418 °F to 1832 °F)
	N	-250 °C to 1300 °C (-418 °F to 2372 °F)
	R	-50°C to 1768°C (-58 °F to 3214 °F)

Data Acquisition		
ADC	16 bit – SAR	
Sampling Interval	1 μ s (1 MSa/s) each channel	
Time and Counting		
Threshold	Set by user, auto	
Duty Cycle	10% minimum – (minimum pulse width, 20 μ s)	
Counter	48 bits	
Frequency	0.1 Hz to 100 kHz	
	Accuracy: 0.01% reading, 0.1 Hz to 10 Hz 0.05% reading, 10 Hz to 100 kHz	
PWM	Absolute error: 0.1% from 0.1 Hz to 1 kHz 0.5% from 1 kHz to 5 kHz	
True RMS		
Compute Period	Compute on the 1 Ms/s data flow Each period until 100 Hz 10 ms between 100 Hz and 10 kHz	
Accuracy (Sine wave \geq 1 V)	10 Hz to 2 kHz	\pm 0.1% of full range
	2 kHz to 10 kHz	\pm 0.3% of full range
Other		
Current	Through shunt or clamp	
Sensor	0 to 10 V, 4 to 20 mA (with external shunt), duty cycle or frequency sensor, other user defined settings	
Calculations	Min - max - avg - pk to pk on Δ t, integral, and derivative	

High Impedance Module ⁵ (D18-HIZ4)		
Voltage		
Input Impedance	10 M Ω for ranges ≥ ± 1 V, 25 M Ω for ranges ≤ ± 0.5 mV	
Intrinsic Noise ³ (standard deviation in % of the span)	≤ ± 1 mV	< 0.2%
	± 2.5 mV to ± 10 mV	< 0.1%
	± 25 mV to ± 500 mV	< 0.05%
	≥ ± 1 V	< 0.05%
Bandwidth and Filters		
Bandwidth	≤ ± 2.5 mV	1 kHz
	± 5 mV to ± 25 mV	10 kHz
	± 50 mV to ± 500 mV	60 kHz
	≥ ± 1 V to ± 10 V	20 kHz
	≥ ± 25 V	80 kHz

- (1) Direct measure taken on DMM at 10 (50 Hz) / 12 (60 Hz) NLPC (200 ms) and full bandwidth
- (2) Only when offset adjustment has been performed after installing a new module. Otherwise accuracy is ± 0.1% of full range (max. range - min. range) + 20 μ V
- (3) Measure ± short circuit termination to 50 Ω on chassis during 1 sec at the fastest acquisition speed and full bandwidth
- (4) Only when cold junction adjustment has been performed after installing a new module and after 30 minutes of connection between TLK2B accessory, thermocouple and module terminal. Otherwise accuracy is ± 3 °C
- (5) For all other specs, refer to the universal module specifications

Specifications, measurement Modules

Note: All specifications apply to the unit after a temperature stabilization time of 30 minutes over an ambient temperature range of 23 °C ± 5 °C.

Multiplexed Module (D18-MUX8)		
Number of Channels	8	
Input Type	Non-isolated differential input – 4 pin terminal block, Part: Phoenix Contact MC 1.5/ 4-ST-3.5	
Voltage		
Maximum Input Voltage	± 48 VDC between CH to GND and between 2 poles on a channel	
Range (16 ranges)	± 500 μV / 1 mV / 2.5 mV / 5 mV / 10 mV / 25 mV / 50 mV / 100 mV / 250 mV / 500 mV / 1 V / 2.5 V / 5 V / 10 V / 25 V / 48 V	
Admissible Common Mode	≤ ± 1 V	± 3 V
	≥ ± 2.5 V	± 48 V
DC Accuracy ¹	≤ ± 10 mV	± 0.1% of full range + 5μV
	≥ ± 25 mV	± 0.04% of full range
Offset Drift	± 50 ppm/°C ± 0.5 μV/°C	
Input Impedance	2 MΩ for ranges ≥ ± 1 V, 25 MΩ for ranges ≤ ± 0.5 V	
Input Capacitance	150 pF	
Intrinsic Noise ² (standard deviation in% of the span)	≤ ± 1 mV	< 0.15%
	± 2.5 mV to ± 10 mV	< 0.05%
	≥ ± 25 mV	< 0.01%
CMRR	> 70 dB	
Crosstalk	> -90 dB	
Bandwidth and Filters		
Bandwidth (-3 dB)	1 kHz	
Digital Filter	IIR 4th order (-80 dB/dec)	0.01 Hz to 500 Hz
	Type	Low pass, high pass, band pass, band stop
	Filter	Butterworth, Bessel, Chebyshev, Inverse Chebyshev, elliptic, Papoulis, Gaussian
Data Acquisition		
ADC	18 bit – SAR	
Sampling Interval	200 μs (5 kSa/s) each channel	
Temperature (RTD)		
Compute Frequency	4 ms	
Current	Pt100	1.0 mA
	Pt200	0.5 mA
	Pt500	0.2 mA
	Pt1000	0.1 mA
Temperature Range	-200 °C to +850 °C (-328 °F to 1562 °F)	
Wiring	2 wires	Max. corrective resistance 50 Ω
	3 wires	Max. 3-wire resistance, 50 Ω
	4 wires	
Measurement Range (7 Ranges)	± 10 °C, ± 25 °C, ± 65 °C, ± 130 °C, ± 200 °C, [-200 °C, +380 °C], [-200 °C, +850 °C]	
Accuracy	3 wires	0.1% of the range ± 0.3 °C
	4 wires	± 0.1% of the range ± 0.2 °C

Temperature (Thermocouple)		
Compute Frequency	4 ms	
Cold Junction	Uncompensated, internal, external (other channel)	
	Accuracy ³ : ± 1.25 °C	
Type	J	-210 °C to 1200 °C (-346 °F to 2192 °F)
	K	-250 °C to 1370 °C (-418 °F to 2498 °F)
	T	-200 °C to 400 °C (-328 °F to 752 °F)
	S	-50 °C to 1760 °C (-58 °F to 3200 °F)
	B	200 °C to 1820 °C (392 °F to 3308 °F)
	E	-250 °C to 1000 °C (-418 °F to 1832 °F)
	N	-250 °C to 1300 °C (-418 °F to 2372 °F)
	R	-50°C to 1768°C (-58 °F to 3214 °F)
Resistance		
Compute Frequency	4 ms	
Wiring	2 wires	Max. corrective resistance 50 Ω
	3 wires	Max. 3-wire resistance, 50 Ω
	4 wires	
Measurement Range (4 Ranges)	300 Ω (1 mA), 1500 Ω (0.5 mA), 5k Ω (0.2 mA), 10 kΩ (0.1 mA)	
Accuracy	± 0.1% of the range ± 0.1 Ω	
Time and Counting		
Threshold	Set by user, auto	
Minimum Pulse Width	1 ms	
Counter	32 bits	
Other		
Current	Through shunt or clamp	
Sensor	0 to 10 V, 4 to 20 mA (with external shunt), other user defined settings	

- (1) Direct measure taken on DMM at 10 (50 Hz) / 12 (60 Hz) NLPC (200 ms) and full bandwidth
- (2) Measure ± short circuit termination to 50 Ω on chassis during 1 sec at the fastest acquisition speed and full bandwidth
- (3) Only when cold junction adjustment has been performed after installing a new module and after 30 minutes of connection between GCMSP accessory, thermocouple and module terminal. Otherwise accuracy is ± 3 °C

Specifications, measurement Modules

Note: All specifications apply to the unit after a temperature stabilization time of 30 minutes over an ambient temperature range of 23 °C ± 5 °C.

High Voltage Module (D18-HVM4)		
Number of Channels	4	
Input Type	Isolated differential input - 4mm Banana Plug	
Voltage		
Max. Input Voltage	± 1500 VDC or 1000 Vrms	
Overvoltage Protection	± 2000 VDC or 1414 Vrms ⁽³⁾	
Range (9 ranges)	± 5 V / 10 V / 25 V ± 50 V / 100 V / 250 V ± 500 V / 1000 V / 2000 V	
DC Accuracy ⁽¹⁾	± 0.06% of full range	
Offset Drift	± 50 ppm/°C ± 1 μV/°C	
Input Impedance (DC)	1 MΩ	
Input Capacitance	10 pF	
Intrinsic Noise ⁽²⁾ (standard deviation in % of the span)	< 0.02%	
CMRR (Common mode rejection range)	> -120 dB	
Crosstalk	> -120 dB	
Channel Isolation	CH to CH and CH to GND, > 100 MΩ at 2000 VDC	
Safety	CAT III 1500 VDC, CAT IV 1000 V	
Bandwidth and Filters		
Bandwidth (-3 dB)	Ranges ≤ ± 2.5 V	30 kHz
	Ranges ≥ ± 50 V	100 kHz
Analog Filter	3rd order(-60 dB/dec)	100 Hz, 1 kHz, 10 kHz
Digital Filter	IIR 4th order (-80 dB/dec)	0.01 Hz to 10 kHz
	Type	Low pass, high pass, band pass, band stop
	Prototypes	Butterworth, Bessel, Chebyshev, Inverse Chebyshev, elliptic, Papoulis, Gaussian

Data Acquisition		
ADC	16 bit - SAR	
Sampling Interval	1 μ s (1 MSA/s) each channel	
Time and Counting		
Threshold	Set by user, auto	
Duty Cycle	10% minimum - minimum pulse width 20 μ s	
Counter	48 bits	
Frequency	0.1 Hz to 50 kHz	
	Accuracy: 0.01% from 0.1 Hz to 10 Hz 0.05% of the value from 10 Hz to 50 kHz	
PWM	Absolute error: 0.1% - 0.1 Hz to 1 kHz 0.5% \geq 1 kHz to 5 kHz	
True RMS		
Compute Period	Compute on the 1 Ms/s data flow Each period until 100 Hz 10 ms between 100 Hz and 10 kHz	
Accuracy (on a Sine wave for range ≥ 10 V)	10 Hz to 2 kHz	$\pm 0.1\%$ of full range
	2 kHz to 10 kHz	$\pm 0.3\%$ of full range
Other		
Current	Through shunt or clamp	
Sensor	0 to 10 V, 4 to 20 mA (with external shunt), duty cycle or frequency sensor, and other user defined settings	
Calculations	Derivative, integral, min - max - avg - pk to pk on Δt	

(1) Direct measure, full bandwidth, value taken on DMM display at 10 (50 Hz) / 12 (60 Hz) NLPC (200 ms)

(2) Measure ± short circuit terminate to 50 Ω on chassis during 1 sec at the fastest acquisition speed and full bandwidth

(3) CH to Earth GND withstand voltage 6.6 kV AC for 5 seconds

Ordering Information

Step 1: Select base unit model and factory options

Models	Description
DAS1800 (base unit)	The DAS1800 base unit includes the following standard; 10 module slots, 2 TB SSD, 16 digital channels, SUB-D 15 HD pin connector for external triggering and synchronization, 5 W power rail, 15.6" TFT LCD Full HD (1920 x 1080), USB 3.0 (x2), USB 2.0 (x2), 1 Gbps LAN (x2), and HDMI (x1) interfaces
DAS1800-BAT	Includes the DAS1800 base unit with a non-removable Lithium-ion battery providing up to 3 ½ hours of continuous use
DAS1800-SYNC	Includes the DAS1800 base unit with hardware supporting GPS and IRIG synchronization
DAS1800-BAT-SYNC	Includes DAS1800 base unit with Li-ion battery and GPS/IRIG hardware
Factory Options	Description
D18-FLE	Fanless version of the DAS1800 base unit
D18-RK	Rackmount version of the DAS1800 base unit
D18-SYNC	Adds hardware to support IRIG and GPS synchronization to a DAS1800 base unit
Software Options	Description
D18-PTP	Enables PTPv2 (IEEE1588) time synchronization through Ethernet

Note: D18-FLE is not compatible with a DAS1800-BAT.

Note: For pricing on all -SYNC options, contact us or submit a request form.

Step 2: Determine the number and type of measurement modules for your application. Select up to 10 modules.

Module	Channels	Measurements
Universal (D18-UNI4)	4	Voltage, current (shunt), temperature (thermocouple), frequency, PWM, True RMS
High Impedance (D18-HIZ4)	4	Voltage, current (shunt), temperature (thermocouple), frequency, PWM, True RMS
Multiplexed (D18-MUX8)	8	Voltage, current (shunt), resistance, temperature (RTD), temperature (thermocouple)
High Voltage (D18-HVM4)	4	Voltage (\pm 1500 VDC), current (shunt), frequency, PWM, True RMS

Note: Refer to the measurement modules and specifications sections for additional information.

Step 4: Contact us

B&K Precision:

For inquiries and assistance configuring your DAS1800, please fill out the [DAS1800 Order Request Form](#).

Or, visit our where to buy page at bkprecision.com to view a list of authorized vendors.

Step 3: Select your accessories

Accessory	Part Number
Isolated digital channel board	917008000
Digital channels patch cord	902407000
Replacement 4 pin terminal block, pack of 8	GCM5P
Replacement quick-connect banana plug, 4 pairs	TLQ2B
Replacement DAS1800 hard case	LCLDR
4-pin 250 Ω shunt, 0.1%, 0.03 A max	D18-MZ250
Banana 50 Ω shunt, 0.1%, 0.05 A max	D18-UZ50
Banana 0.01 Ω shunt, 1%, 5 A max	D18-UZ001

Sefram:

Visit <https://www.sefram.com/en/contact-us.html> to request a quote.

BK PRECISION

About B&K Precision

For more than 70 years, B&K Precision has provided reliable and value-priced test and measurement instruments worldwide.

Our headquarters in Yorba Linda, California houses our administrative and executive functions as well as sales and marketing, design, service, and repair. Our European customers are most familiar with B&K through our French subsidiary, Sefram. Engineers in Asia know us through our B+K Precision Taiwan operation. The independent service centers in Singapore and Brasil service customers in Singapore, Malaysia, Vietnam, Indonesia and South America, respectively.



● B&K Precision group member ● Independent service center ● Service center location



Mess- und Prüftechnik. Die Experten.

**Ihr Ansprechpartner /
Your Partner:**

dataTec AG
E-Mail: info@datatec.eu
>>> www.datatec.eu



About Sefram

Established in 1947, Sefram has been designing and manufacturing data recorders for more than 70 years. Sefram joined the test and measurement division of Schlumberger in 1978, and has been a subsidiary of B&K Precision since 2004. Certified ISO 9001, Sefram's strategy is to provide innovative and high-quality test and measurement products for electronic and electrical applications.

[Sefram Video Library](#)



Quality Management System

B&K Precision Corporation is an ISO9001 registered company employing traceable quality management practices for all processes including product development, service, and calibration.

ISO9001:2015

Certification body NSF-ISR

Certificate number 6Z241-ISR



NSF-ISR

Registered to ISO 9001

Video Library

View product overviews, demonstrations, and application videos in English, Spanish and Portuguese.

<http://www.youtube.com/user/BKPrecisionVideos>

Product Applications

Browse all of our supported product and mobile applications.

<http://bkprecision.com/product-applications>