

Isolated Measurement Systems

TIVP1, TIVP05, TIVP02 Model Datasheet



Overview

IsoVu probe technology delivers accurate differential measurements up to ± 2500 V on reference voltages slewing ± 60 kV at 100 V/ns or faster. With the IsoVu Generation 2 design, you get all the benefits of IsoVu technology at 1/5 of the size of first generation probes.

With versatile MMCX connectors and an unmatched combination of bandwidth, dynamic range, and common mode rejection, IsoVu Gen 2 probes are setting new standards for isolated probe technology and enabling wide bandgap power designs using SiC and GaN.

Benefits of IsoVu Probes


IsoVu technology uses power-over-fiber and an optical analog signal path for complete galvanic isolation between the measurement system and your DUT. By allowing the probe to float independently at the common mode voltage, isolation provides important advantages.

- 160 dB (100 million to 1) CMRR at DC
- Up to 120 dB (1 million to 1) CMRR at 100 MHz
- Up to 80 dB (10,000 to 1) CMRR at 1 GHz
- ± 60 kV Common Mode Voltage range
- Up to ± 2500 V differential input Voltage range
- Up to ± 2500 V offset range

High Voltage and High Bandwidth

With traditional differential probes you had to choose between high bandwidth or high voltage levels. IsoVu probes, with their shielded coaxial cable and isolation, provide high bandwidth and a differential voltage range of ± 2500 V. IsoVu Gen 2 offers bandwidths of 200 MHz, 500 MHz, and 1 GHz to fit your budget and performance needs.

High Performance and Convenient Connections

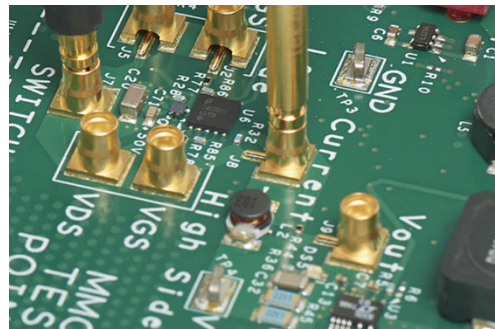

IsoVu probe tips have a range of connections and accessories that offer high performance and accessibility. The probes can connect directly to MMCX connectors, which are inexpensive and widely-available. This makes for stable, hands-free test points and offer high bandwidth and common mode rejection. The solid metal body shields the center conductor and minimizes ground loop area for the lowest interference possible.

Other accessories are available to adapt the probe tips to a wide range of connections. Additional 0.100" and 0.200" spaced square-pin tips are available for applications that require greater than ± 250 V differential voltage. When not using a tip, the sensor head has 1 M Ω and 50 Ω switchable termination at the probe's SMA connector. This feature effectively adds an isolated channel to any compatible oscilloscope.

Floating Measurements in Power Converter and Motor Drive Designs

Making high-side measurements in half-bridge power converters is challenging because the source or collector to which the measurements are referenced is slewing rapidly up and down. Wide bandgap devices like SiC and GaN FETs are even harder to measure because they can switch high voltages in a few nanoseconds. Noise from this rapidly changing common mode voltage leaks into the differential measurements and hides details on VGS and VDS. IsoVu probes have unmatched common mode rejection at full bandwidth that lets you see signal details, often for the first time.



**Ihr Ansprechpartner /
Your Partner:**

dataTec AG
E-Mail: info@datatec.eu
datatec.eu

Applications

- Half/Full bridge designs using SiC or GaN, FETs, or IGBTs
- Floating measurements
- Power converter design
- Power device evaluation
- Switching power supply design
- Inverter design
- Motor drive design
- Electronic ballast design
- EMI and ESD troubleshooting
- Current shunt measurements

Specifications

All specifications are Typical and apply to all models unless noted otherwise.

Probe overview

Characteristic	TIVP1	TIVP05	TIVP02
Bandwidth	1 GHz	500 MHz	200 MHz
Rise time	450 ps	850 ps	2 ns

Differential Input Voltage Range, Offset Range, Single-ended Impedance

Use only the sensor tip cables listed.

Sensor tip cable	Differential input voltage range	Offset range	Single-ended input impedance
SMA Input (50 Ω mode)	± 5 V	± 25 V	50 Ω N.A.
SMA Input (1 M Ω mode)	± 5 V	± 25 V	1 M Ω 11 pF
TIVPMX10X	± 50 V	± 200 V	10 M Ω 2.8 pF
TIVPMX50X	± 250 V	± 250 V	9.75 M Ω 2.3 pF
TIVPSQ100X	± 500 V	± 500 V	9.75 M Ω 3.5 pF
TIVPWS500X	± 2.5 kV	± 2.5 kV	40 M Ω 2.4 pF
TIVPMX1X	± 5 V	± 25 V	50 Ω or 1 M Ω 28 pF

Common Mode Rejection Ratio

Approximately 20 dB lower in ± 5 V Range, except at DC						
Sensor tip cable	DC	1 MHz	100 MHz	200 MHz	500 MHz	1 GHz
SMA Input (50 Ω mode)	160 dB	145 dB	100 dB	100 dB	100 dB	90 dB
SMA Input (1 M Ω mode)	160 dB	145 dB	100 dB	100 dB	100 dB	90 dB
TIVPMX10X	160 dB	115 dB	92 dB	90 dB	85 dB	80 dB
TIVPMX50X	160 dB	110 dB	80 dB	80 dB	80 dB	70 dB
TIVPSQ100X	160 dB	105 dB	60 dB	50 dB	35 dB	25 dB
TIVPWS500X	160 dB	90 dB	50 dB	40 dB	20 dB	10 dB
TIVPMX1X	160 dB	125 dB	115 dB	110 dB	100 dB	90 dB

Probe tip serial numbers B020XXX and above (flexible tip versions)						
Sensor tip cable	DC	1 MHz	100 MHz	200 MHz	500 MHz	1 GHz
TIVPMX10X	160 dB	110 dB	92 dB	90 dB	85 dB	60 dB
TIVPMX50X	160 dB	90 dB	75 dB	70 dB	70 dB	45 dB
TIVPSQ100X	160 dB	100 dB	60 dB	50 dB	35 dB	20 dB
TIVPWS500X	160 dB	80 dB	40 dB	35 dB	20 dB	10 dB
TIVPMX1X	160 dB	120 dB	105 dB	105 dB	90 dB	70 dB

Maximum Non-Destructive Differential Voltage

Derated with frequency; refer to the Maximum differential input voltage vs. frequency derating graph in the Specifications section of the TIVP Series IsoVu Measurement System User Manual.

Sensor tip cable	Vpk (DC + peak AC)
SMA Input (50 Ω mode)	5V RMS
SMA Input (1 M Ω mode)	100 Vpk
TIVPMX10X	250 Vpk
TIVPMX50X	300 Vpk
TIVPSQ100X	600 Vpk
TIVPWS500X	3300 Vpk
TIVPMX1X	5 V RMS (50 Ω), 100 Vpk (1 M Ω)

Common mode voltage range

60 kV peak

Common mode input impedance (typical)

- Input resistance: Galvanically isolated through the fiber optic connection
- Input capacitance: <2 pF

The capacitance between the sensor head and a reference plane. The sensor head is placed six inches (15.25 cm) above the reference plane.

Differential DC gain accuracy

<1.5% after self-cal; additional 4.5% within 4C of self-cal

System noise (RMS)

Sensor tip cable	±20 mV range (most sensitive)	±320 mV range	±5 V range (widest range)
SMA Input (50 Ω mode)	0.43 mV rms	1.46 mV rms	48 mV rms
SMA Input (1 MΩ mode)	0.43 mV rms	1.46 mV rms	48 mV rms
TIVPMX10X	4.3 mV rms	14.6 mV rms	480 mV rms
TIVPMX50X	21.5 mV rms	73 mV rms	2.4 V rms
TIVPSQ100X	43 mV rms	146 mV rms	4.8 V rms
TIVPWS500X	215 mV rms	730 mV rms	24 V rms

Propagation delay

- 2 meter cable: 18.3 ns (19.3 ns with tip attached)
- 10 meter cable: 63.7 ns (64.7 ns with tip attached)

Laser certification

CLASS I LASER PRODUCT

This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007.

Ordering information

Item	Description
TIVP1	Tektronix IsoVu 1 GHz Isolated Probe with 2 m cable
TIVP05	Tektronix IsoVu 500 MHz Isolated Probe with 2 m cable
TIVP02	Tektronix IsoVu 200 MHz Isolated Probe with 2 m cable
TIVP1L	Tektronix IsoVu 1 GHz Isolated Probe with 10 m cable
TIVP05L	Tektronix IsoVu 500 MHz Isolated Probe with 10 m cable
TIVP02L	Tektronix IsoVu 200 MHz Isolated Probe with 10 m cable

Standard accessories

Item	Description
016-2147-XX	IsoVu carrying case for 2 m cable models; soft case (with foam insert) protects the TIVP and enforces the optical fiber minimum bend radius
016-2149-XX	IsoVu carrying case for 10 m cable models; soft case (with foam insert) protects the TIVP and enforces the optical fiber minimum bend radius
03-1947-XX	SMA wrench/driver tool; 5/16" wrench for use on SMA connector
131-9717-XX	Probe tip adapter; adapt an MMCX IsoVu tip to standard 0.100" spaced, 0.025" square pins
352-1179-XX	Probe bipod for probe; TIVP can rotate in holder to accommodate square pin headers
TIVPMX10X	MMCX probe tip; MMCX tip is recommended for the best bandwidth and CMRR performance
Certificate of traceable calibration	
Translated manuals on your local Tektronix Web site	

Recommended accessories

Item	Description
TIVPMX50X	50X sensor tip cable with MMCX connector
TIVPSQ100X	100X sensor tip cable with 0.100" spaced square pin connectors
TIVPWS500X	500X sensor tip cable with 0.200" spaced wide square pin connector
TIVPMX1X	1X MMCX sensor tip
131-9677-XX	Square Pin to MMCX Adapter, 0.062" Spacing
352-1170-XX	Probe Tip Tripod Support
196-3546-XX	Lead, MMCX to IC Grabber
196-3547-XX	Lead, Square Pin to IC Grabber

Item	Description
020-3189-XX	Kit, Wide Square Pin to Banana Jack with Alligator Clamps and Support Brace
196-3434-XX	Square Pin Y-lead
206-0569-XX	MicroCKT grabbers
020-3169-XX	Spare Pins for 0.062" Spaced Test Points
003-1946-XX	Solder Aid for 0.062" Spaced Square Pins

Supported oscilloscopes

The measurement systems can only be used with 4 Series, 5 Series, and 6 Series Mixed Signal Oscilloscopes.

Service options

Opt. R3 - Repair Service 3 Years (including warranty)

Opt. R5 - Repair Service 5 Years (including warranty)

Opt. C3 - Calibration Service 3 Years

Opt. C5 - Calibration Service 5 Years

Opt. D1 - Calibration Data Report

Opt. D3 - Calibration Data Report 3 Years (with Opt. C3)

Opt. D5 - Calibration Data Report 5 Years (with Opt. C5)

Probes and accessories are not covered by the oscilloscope warranty and Service Offerings. Refer to the datasheet of each probe and accessory model for its unique warranty and calibration terms.

Certifications

Tektronix is registered to ISO 9001:2015 and ISO 14001:2015.

Contact Information:

Australia 1 800 709 465
Austria* 00800 2255 4835
Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Belgium* 00800 2255 4835
Brazil +55 (11) 3530-8901
Canada 1 800 833 9200
Central East Europe / Baltics +41 52 675 3777
Central Europe / Greece +41 52 675 3777
Denmark +45 80 88 1401
Finland +41 52 675 3777
France* 00800 2255 4835
Germany* 00800 2255 4835
Hong Kong 400 820 5835
India 000 800 650 1835
Indonesia 007 803 601 5249
Italy 00800 2255 4835
Japan 81(3) 6714 3086
Luxembourg +41 52 675 3777
Malaysia 1 800 22 55835
Mexico, Central/South America and Caribbean 52 (55) 88 69 35 25
Middle East, Asia, and North Africa +41 52 675 3777
The Netherlands* 00800 2255 4835
New Zealand 0800 800 238
Norway 800 16098
People's Republic of China 400 820 5835
Philippines 1 800 1601 0077
Poland +41 52 675 3777
Portugal 80 08 12370
Republic of Korea +82 2 565 1455
Russia / CIS +7 (495) 6647564
Singapore 800 6011 473
South Africa +41 52 675 3777
Spain* 00800 2255 4835
Sweden* 00800 2255 4835
Switzerland* 00800 2255 4835
Taiwan 886 (2) 2656 6688
Thailand 1 800 011 931
United Kingdom / Ireland* 00800 2255 4835
USA 1 800 833 9200
Vietnam 12060128

* European toll-free number. If not accessible, call: +41 52 675 3777



**Ihr Ansprechpartner /
Your Partner:**

dataTec AG
E-Mail: info@datatec.eu
datatec.eu

Mess- und Prüftechnik. Die Experten.

Find more valuable resources at TEK.COM

Tektronix®

Copyright © Tektronix. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

51W-61655-7 June 2026