

R&S® ZND VECTOR NETWORK ANALYZER

Specifications

3
year
warranty



Data Sheet
Version 06.00

ROHDE & SCHWARZ

Make ideas real



Distributed by:

Sie haben Fragen oder wünschen eine Beratung? Angebotsanfrage unter +49 7121 / 51 50 50 oder über info@datatec.eu

dataTec

CONTENTS

Definitions	3
Base unit	4
Measurement range	4
Measurement speed	5
Measurement accuracy	7
Effective system data	9
Factory-calibrated system data	9
Test port output	10
Test port input	10
Additional front panel connectors	10
Display	10
Rear panel connectors	11
Options	12
R&S®ZND-K1	12
R&S®ZND-K5	12
R&S®ZND-K6	12
R&S®ZND-K7	12
R&S®ZND-K8	12
R&S®ZND-B7	13
R&S®ZND-B10	13
R&S®ZN-B14	13
R&S®ZND-K980	14
General data	15
Dimensions (in mm)	16
Ordering information	18

Definitions


General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as $<$, \leq , $>$, \geq , \pm , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

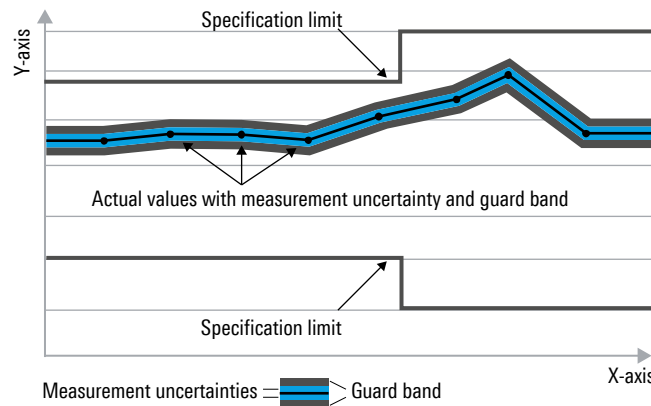

Non-traceable specifications with limits (n. trc.)

Represent product performance that is specified and tested as described under “Specifications with limits” above. However, product performance in this case cannot be warranted due to the lack of measuring equipment traceable to national metrology standards. In this case, measurements are referenced to standards used in the Rohde & Schwarz laboratories.

Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with $<$, $>$ or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are designated with the format “parameter: value”.

Non-traceable specifications with limits, typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

In line with the 3GPP/3GPP2 standard, chip rates are specified in million chips per second (Mcps), whereas bit rates and symbol rates are specified in billion bits per second (Gbps), million bits per second (Mbps), thousand bits per second (kbps), million symbols per second (Msps) or thousand symbols per second (ksps), and sample rates are specified in million samples per second (Msample/s). Gbps, Mcps, Mbps, Msps, kbps, ksps and Msample/s are not SI units.


Base unit

Measurement range

Impedance		50 Ω
Test port connector		N female
Number of test ports		2
Test set configuration	base unit	unidirectional
	R&S®ZND with optional R&S®ZND-K5 or R&S®ZND-K6	bidirectional
Frequency range ¹	base unit	100 kHz to 4.5 GHz
	R&S®ZND with optional R&S®ZND-K1 or R&S®ZND-K8	100 kHz to 8.5 GHz

Static frequency accuracy		(time since last adjustment \times aging rate) + temperature drift + calibration accuracy
Aging per year		$\pm 1 \times 10^{-6}$
Temperature drift	(+5 °C to +40 °C)	$\pm 1 \times 10^{-6}$
Achievable initial calibration accuracy		$\pm 5 \times 10^{-7}$

Frequency resolution		1 Hz
Number of measurement points	per trace	2 to 5001
Measurement bandwidth	1/1.5/2/3/5/7 steps	1 Hz to 300 kHz
Dynamic range ²	100 kHz to 6.5 GHz	> 120 dB, typ. 130 dB
	6.5 GHz to 8.5 GHz	> 110 dB, typ. 125 dB

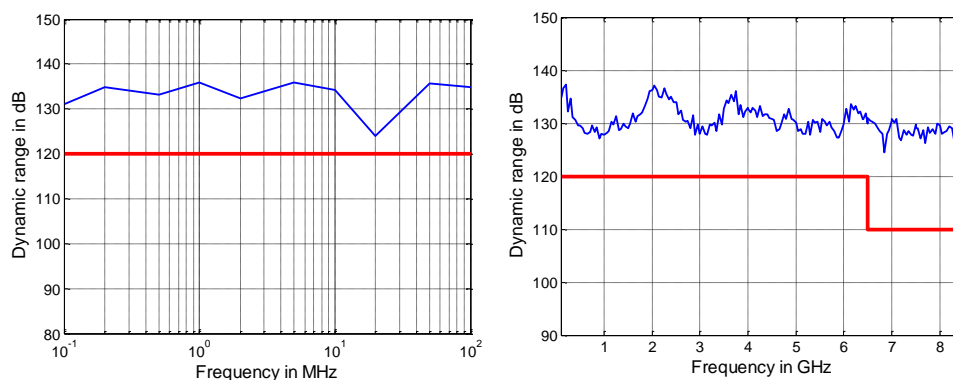

Dynamic range in dB versus frequency for the R&S®ZND base unit


¹ Specified and typical data given in this data sheet applies to any model of the R&S®ZND; please note its respective frequency and power range as well as the test set configuration.

² The dynamic range is defined as the difference between the actual maximum source power and the RMS value of the data trace of the transmission magnitude, which is produced by noise and crosstalk with the test ports short-circuited. The specification applies at 10 Hz measurement bandwidth, without system error correction. The dynamic range can be increased by using a measurement bandwidth of 1 Hz. Crosstalk does not limit the dynamic range.

Measurement speed

Measured with firmware version 3.10 and Windows 10.

Measurement time	for 201 measurements points, with 200 MHz span, 300 kHz measurement bandwidth			
		T_{SWEEP}	T_{CYCLE}	
	with 900 MHz center frequency	< 4.0 ms	< 5.0 ms	
	with 5.1 GHz center frequency	< 3.0 ms	< 5.0 ms	
Acquisition time per point (T_{ACQ})	300 kHz measurement bandwidth, CW mode	< 10.0 μs		
Sampling time per point (T_{SAMPLE})	at 300 kHz measurement bandwidth; IF filter: normal	2.91 μs		
Time for measurement and data transfer	for 201 measurements points, with 800 MHz start frequency, 1 GHz stop frequency, 1 MHz measurement bandwidth ³	IEC/IEEE	VXI11	RSIB
			over 1 Gbit/s LAN	
		typ. 5.7 ms	typ. 6.0 ms	typ. 6.0 ms
Data transfer time	for 201 measurements points (magnitude)	typ. 1.5 ms	typ. 1.4 ms	typ. 1.0 ms
Switching time between channels	with a maximum of 2001 points	< 5 ms		
Switching time between two preloaded instrument settings	with a maximum of 2001 points	< 5 ms		

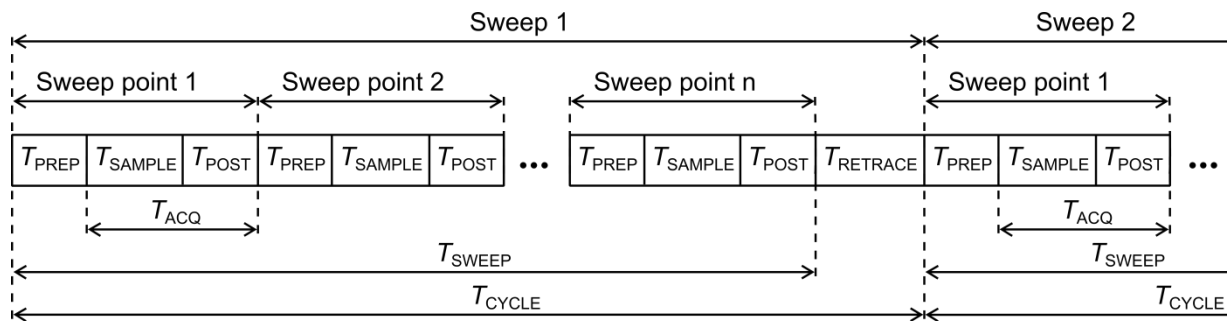

- T_{PREP} Preparation time required to set up the internal hardware components
 T_{SAMPLE} Sampling time (approximately equal to the settling time of the digital filters)
 T_{POST} Time required for hardware postprocessing
 T_{ACQ} Acquisition time ($T_{\text{SAMPLE}} + T_{\text{POST}}$)
 T_{SWEEP} Time required for one sweep
 T_{RETRACE} Time between two sweeps
 T_{CYCLE} Sweep cycle time ($T_{\text{SWEEP}} + T_{\text{RETRACE}}$)

Measurement sequence

³ In continuous mode, no additional time for data transfer is required as this occurs simultaneously during the measurement.

Typical sweep times in ms versus number of measurement points ⁴ of the R&S®ZND					
Number of measurement points	51	201	401	1601	5001
800 MHz start frequency, 1 GHz stop frequency, 1 kHz measurement bandwidth					
With correction switched off or 1-path, 2-port correction ⁵	52.6	202	402	1548	4831
With 2-port TOSM calibration	104	403	802	3094	9661
800 MHz start frequency, 1 GHz stop frequency, 100 kHz measurement bandwidth					
With correction switched off or 1-path, 2-port correction	2.7	6.3	9.1	26.7	80
With 2-port TOSM calibration	4.4	11.2	17	52.1	158
800 MHz start frequency, 1 GHz stop frequency, 300 kHz measurement bandwidth					
With correction switched off or 1-path, 2-port correction	2.3	5	6.3	15.4	44.5
With 2-port TOSM calibration	3.6	8.4	11.6	30.1	87
100 kHz start frequency, 4.5 GHz stop frequency, 1 kHz measurement bandwidth					
With correction switched off or 1-path, 2-port correction	55.6	203	400	1580	4921
With 2-port TOSM calibration	110	406	799	3159	9842
100 kHz start frequency, 4.5 GHz stop frequency, 100 kHz measurement bandwidth					
With correction switched off or 1-path, 2-port correction	4.9	8.9	13.8	40.2	110
With 2-port TOSM calibration	8.6	16.8	25.9	78.6	218
100 kHz start frequency, 4.5 GHz stop frequency, 300 kHz measurement bandwidth					
With correction switched off or 1-path, 2-port correction	4.6	7.4	10.5	28.1	73.8
With 2-port TOSM calibration	7.8	13.2	19.5	54.2	145
100 kHz start frequency, 8.5 GHz stop frequency, 1 kHz measurement bandwidth					
With correction switched off or 1-path, 2-port correction	57	205	402	1580	4915
With 2-port TOSM calibration	113	409	802	3159	9830
100 kHz start frequency, 8.5 GHz stop frequency, 100 kHz measurement bandwidth					
With correction switched off or 1-path, 2-port correction	5.5	10.1	14.9	40.9	112
With 2-port TOSM calibration	10.1	18.9	28.8	80.5	221
100 kHz start frequency, 8.5 GHz stop frequency, 300 kHz measurement bandwidth					
With correction switched off or 1-path, 2-port correction	5	8.3	11.6	29	74.9
With 2-port TOSM calibration	9.1	15.5	22.1	56.5	148



⁴ Sweep time is to be understood as cycle time; static frequency accuracy of the instrument applies; measured with firmware version 3.10, Windows 10.

⁵ Enhanced response calibration.

Measurement accuracy



This data is valid between +18 °C and +28 °C, provided the temperature has not varied by more than 1 °C after calibration. Validity of the data is conditional on the use of an R&S®ZV-Z270 calibration kit. This calibration kit is used to achieve the effective system data specified below. Frequency points, measurement bandwidth and sweep time have to be identical for measurement and calibration (no interpolation allowed).

Accuracy of transmission measurements			
Above 100 kHz		Base unit and R&S®ZND-K1	Base unit and R&S®ZND-K5, -K6 and -K8
	+5 dB to –35 dB	< 0.65 dB or < 6°	< 0.095 dB or < 1.5°
	–35 dB to –50 dB	< 0.40 dB or < 3°	< 0.1 dB or < 2°
	–50 dB to –65 dB	< 0.45 dB or < 3°	< 0.2 dB or < 2°
Specifications are based on a matched DUT, a measurement bandwidth of 10 Hz and a nominal source power of –10 dBm.			

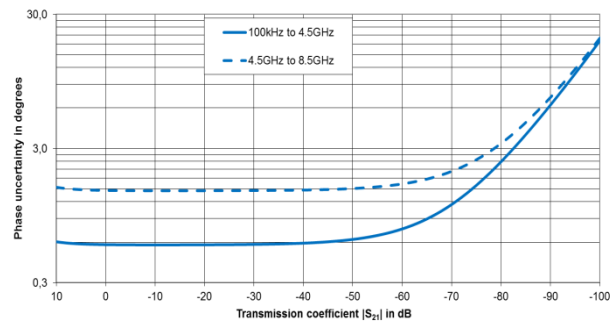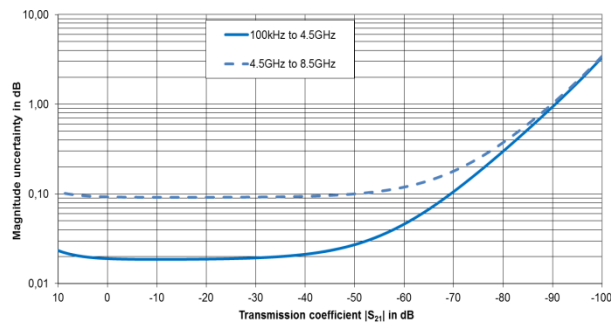



*Typical accuracy of transmission magnitude and transmission phase measurements for the R&S®ZND;
analysis conditions: $S_{11} = S_{22} = 0$, cal. power –10 dBm, meas. power –10 dBm,
R&S®ZND-K5, R&S®ZND-K6 or R&S®ZND-K8 installed*

The accuracy of transmission measurements is reduced for DUTs with non-zero output reflection, i.e. $|S_{22}| > 0$ using a unidirectional test set.

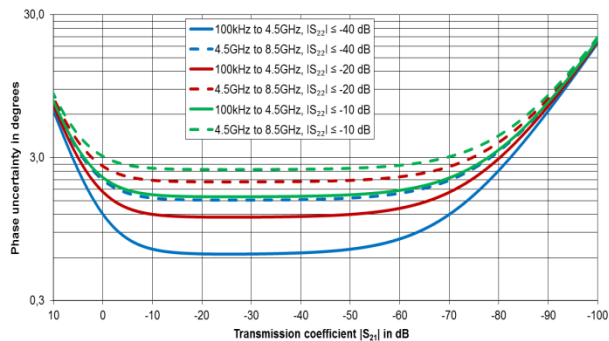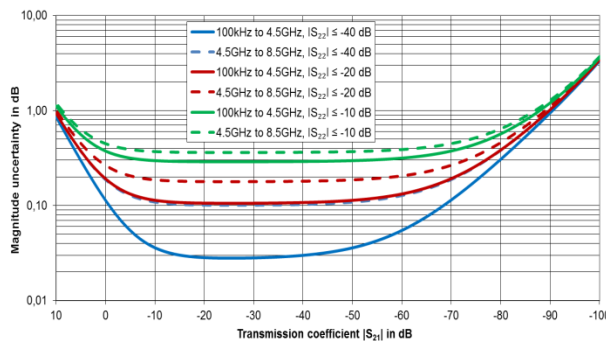



*Typical accuracy of transmission magnitude and transmission phase measurements for the R&S®ZND;
analysis conditions: $S_{11} = 0$, cal. power –10 dBm, meas. power –10 dBm, base unit or R&S®ZND-K1 installed*

Accuracy of reflection measurements			Base unit and R&S®ZND-K1		Base unit and R&S®ZND-K5, -K6 and -K8
Configuration			Base unit and R&S®ZND-K1		Base unit and R&S®ZND-K5, -K6 and -K8
Type of DUT			1-port DUT	2-port DUT	1 or 2-port DUT
100 kHz to 50 MHz	0 dB to –15 dB		< 0.3 dB or < 2.5°	typ. < 1.0 dB or typ. < 8°	< 0.3 dB or < 2.5°
	–15 dB to –25 dB		< 0.9 dB or < 6°	typ. < 1.0 dB or typ. < 12°	< 0.9 dB or < 6°
	–25 dB to –35 dB		< 3.0 dB or < 30°	typ. < 3.0 dB or typ. < 30°	< 3.0 dB or < 30°
50 MHz to 4 GHz	0 dB to –15 dB		< 0.2 dB or < 1.5°	typ. < 1.0 dB or typ. < 8°	< 0.2 dB or < 1.5°
	–15 dB to –25 dB		< 0.5 dB or < 3.5°	typ. < 1.0 dB or typ. < 12°	< 0.5 dB or < 3.5°
	–25 dB to –35 dB		< 2.0 dB or < 16°	typ. < 2.0 dB or typ. < 30°	< 2.0 dB or < 16°
4 GHz to 8.5 GHz	0 dB to –15 dB		< 0.6 dB or < 4.5°	typ. < 0.6 dB or typ. < 5°	< 0.6 dB or < 4.5°
	–15 dB to –25 dB		< 1.4 dB or < 10°	typ. < 1.5 dB or typ. < 12°	< 1.4 dB or < 10°
	–25 dB to –35 dB		< 4.0 dB or < 30°	typ. < 4.0 dB or typ. < 30°	< 4.0 dB or < 30°
Specifications are based on an isolating DUT, a measurement bandwidth of 10 Hz and a nominal source power of –10 dBm.					

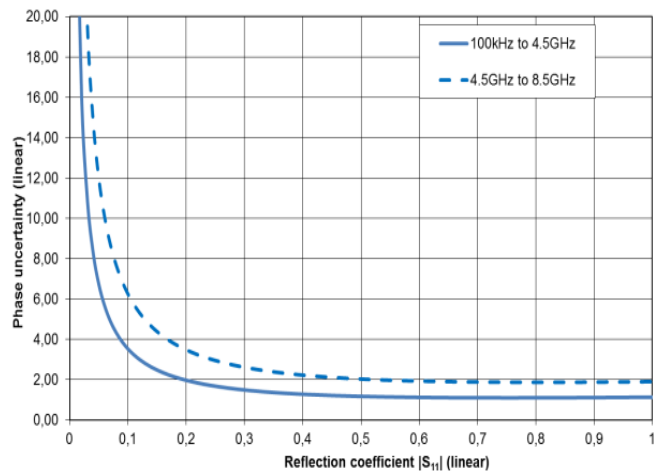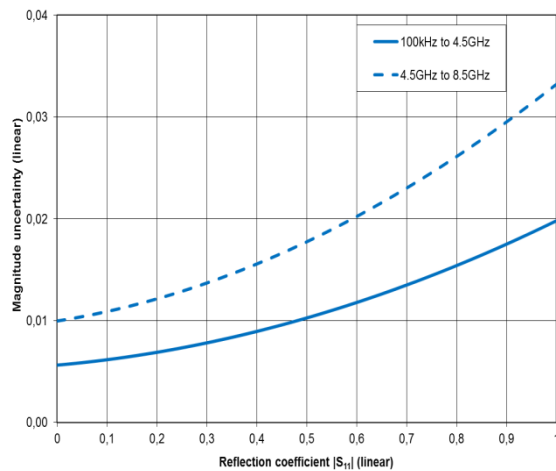

Typical accuracy of reflection magnitude and reflection phase measurements for the R&S®ZND;
analysis conditions: $S_{12} = S_{21} = 0$, cal. power –10 dBm, meas. power –10 dBm,
R&S®ZND-K5, R&S®ZND-K6 or R&S®ZND-K8 installed

The accuracy of reflection measurements is reduced for non-isolating DUTs, i.e. $|S_{12}| > 0$ using a unidirectional test set.

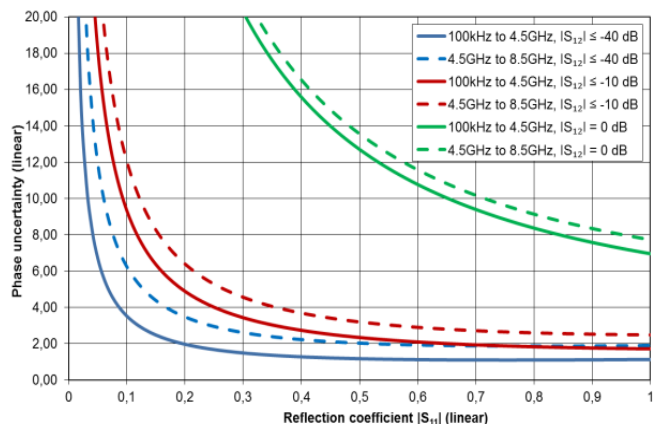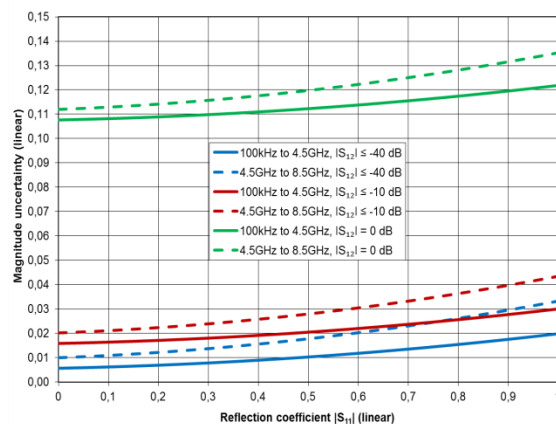

Typical accuracy of reflection magnitude and reflection phase measurements for the R&S®ZND;
analysis conditions: $S_{21} = 0$, cal. power –10 dBm, meas. power –10 dBm, base unit or R&S®ZND-K1 installed

Effective system data

This data is valid between +18 °C and +28 °C, provided the temperature has not varied by more than 1 °C after calibration. Frequency points, measurement bandwidth and sweep time have to be identical for measurement and calibration (no interpolation allowed). For unidirectional test set applicable specified values are related to port 1 only.


The data is based on a measurement bandwidth of 10 Hz and system error calibration with an R&S®ZV-Z270 calibration kit.

R&S®ZND	100 kHz to 4.5 GHz	4.5 GHz to 8.5 GHz
Directivity	≥ 45 dB	≥ 40 dB
Source match	≥ 40 dB	≥ 36 dB
Load match	≥ 45 dB	≥ 40 dB
Reflection tracking	≤ 0.02 dB	≤ 0.05 dB
Transmission tracking	≤ 0.018 dB	≤ 0.09 dB

Factory-calibrated system data

This data is valid between +18 °C and +28 °C. The data is based on a source power of –10 dBm and a measurement bandwidth of 1 kHz. For unidirectional test set, applicable specified values are related to port 1 only.

Directivity	100 kHz to 8.5 GHz	none or R&S®ZND-K1 R&S®ZND-K5, R&S®ZND-K6 or R&S®ZND-K8	> 30 dB, typ. 50 dB
Source match	100 kHz to 8.5 GHz	none or R&S®ZND-K1 R&S®ZND-K5, R&S®ZND-K6 or R&S®ZND-K8	> 30 dB, typ. 50 dB
Reflection tracking	100 kHz to 8.5 GHz	none or R&S®ZND-K1 R&S®ZND-K5, R&S®ZND-K6 or R&S®ZND-K8	< 0.5 dB, typ. 0.1 dB
Transmission tracking	100 kHz to 8.5 GHz	none or R&S®ZND-K1 R&S®ZND-K5, R&S®ZND-K6 or R&S®ZND-K8	typ. 0.2 dB < 0.5 dB, typ. 0.1 dB
Load match	100 kHz to 8.5 GHz	none or R&S®ZND-K1 R&S®ZND-K5, R&S®ZND-K6 or R&S®ZND-K8	typ. 20 dB > 15 dB, typ. 20 dB

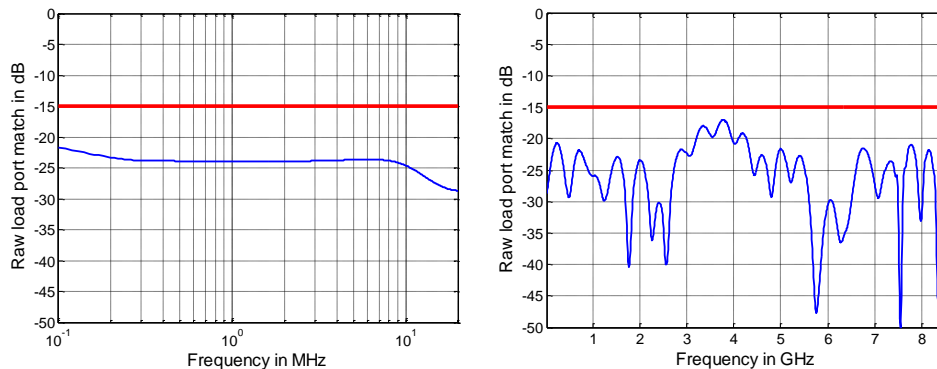


Raw load port match versus frequency for the R&S®ZND

Trace stability			
Trace noise magnitude (RMS)	at 0 dBm source power, 0 dB reflection	IF bandwidth	
	100 kHz to 100 MHz	10 kHz	< 0.005 dB, typ. 0.001 dB
	100 MHz to 8.5 GHz	10 kHz	< 0.005 dB, typ. 0.002 dB
Trace noise phase (RMS)	at 0 dBm source power, 0 dB reflection	IF bandwidth	
	100 kHz to 100 MHz	10 kHz	< 0.035°, typ. 0.005°
	100 MHz to 8.5 GHz	10 kHz	< 0.035°, typ. 0.02°
Temperature dependence	at 0 dB transmission or reflection		
	100 kHz to 4.5 GHz	magnitude	typ. 0.01 dB/K
		phase	typ. 0.15°/K
	4.5 GHz to 8.5 GHz	magnitude	typ. 0.04 dB/K
		phase	typ. 0.8°/K

Test port output

This data is valid from +18 °C to +28 °C.

Power range	bare instrument without power extending options R&S®ZND-B7, R&S®ZND-K7	–20 dBm to +3 dBm
Power accuracy	source power –10 dBm	< 2 dB, typ. 0.5 dB
Power linearity	referenced to –10 dBm	< 1 dB
Power resolution		0.01 dB
Harmonics	at 0 dBm	
	100 kHz to 100 MHz	typ. –30 dBc
	100 MHz to 8.5 GHz	< –25 dBc, typ. –35 dBc

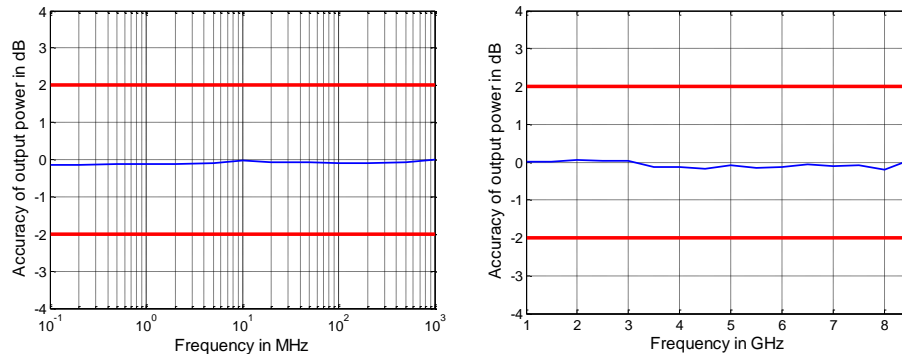

Output power accuracy in dB versus frequency for the R&S®ZND base unit

Test port input

Match	without system error correction	> 15 dB
Maximum nominal input level		+3 dBm
Power measurement accuracy	at –10 dBm without power calibration	< 1 dB
Receiver linearity, referenced to –10 dBm	+13 dB to –35 dB	< 0.2 dB
Damage level		+27 dBm
Damage DC voltage		30 V
Noise level at 1 kHz measurement bandwidth, normalized to 1 Hz	100 kHz to 50 MHz	< –118 dBm, typ. –125 dBm
	50 MHz to 6.5 GHz	< –120 dBm, typ. –125 dBm
	6.5 GHz to 8.5 GHz	< –110 dBm, typ. –120 dBm
The noise level is defined as the RMS value of the specified noise floor.		

Additional front panel connectors

USB device	front panel	4 ports, type A plug, version 2.0
------------	-------------	-----------------------------------

Display

Screen		30.7 cm (12.1") WXGA, 18-bit color LCD with touchscreen
Resolution		1280 × 800 pixel, 125 dpi)
Pixel failure rate		< 1 × 10 ⁻⁵

Rear panel connectors

LAN	8-pin, RJ-45
-----	--------------

USB device	2 ports, type A plug, version 3.0
------------	-----------------------------------

REF IN	input for external frequency reference signal	
Connector type		BNC, female
Input frequency range		1 MHz to 20 MHz in steps of 1 MHz
Maximum permissible deviation		1 kHz
Input power		−10 dBm to +15 dBm
Input impedance		50 Ω

REF OUT	output for external frequency reference signal	
Connector type		BNC, female
Output frequency		10 MHz
Output power		+9 dBm ± 4 dB at 50 Ω

MONITOR	DVI connector (for external monitor)
----------------	--------------------------------------

USER CONTROL	several control and trigger signals, 25-pin D-Sub, 3.3 V TTL, for controlling external generators, for limit checks, sweep signals, etc.	
CHANNEL BIT 0 to CHANNEL BIT 3	pin 8 to pin 11 (outputs)	channel-specific, user-configurable bits
CHANNEL BIT 4 to CHANNEL BIT 7	pin 16 to pin 19 (outputs)	channel-specific, user-configurable bits
DRIVE PORT 1 to DRIVE PORT 4	pin 16 to pin 19 (outputs)	indicates drive ports (can alternatively be used for channel bits 4 to 7)
PASS 1 and PASS 2	pin 13 and pin 14 (outputs)	pass/fail results of limit checks
BUSY	pin 4 (output)	measurements running
READY FOR TRIGGER	pin 6 (output)	ready for trigger
EXT GEN TRIGGER	pin 21 (output)	control signal for external generator
EXT GEN BLANK	pin 22 (input)	handshake signal from external generator
EXTERNAL TRIGGER	pin 2 (input)	first trigger input for analyzer, 5 V tolerant
EXTERNAL TRIGGER 2	pin 25 (input)	second trigger input for analyzer, 5 V tolerant

EXT TRIG IN	trigger input for analyzer	
Connector type		BNC, female
TTL signal (edge-triggered or level-triggered)		3 V, 5 V tolerant
Polarity (selectable)		positive or negative
Minimum pulse width		1 μs
Input impedance		> 10 kΩ

EXT TRIG OUT	trigger output of analyzer	
Connector type		BNC, female
Logic high		typ. 3.3 V

Options

For subsequently activated options, all data sheet parameters are typical values until a calibration is performed.

R&S®ZND-K1

Extended frequency range, 8.5 GHz	frequency range extension for unidirectional units
Frequency range	100 kHz to 8.5 GHz
Bidirectional measurements	R&S®ZND-K6 option required
Prerequisites	R&S®ZND base unit

R&S®ZND-K5

Full test set, base unit, 4.5 GHz	bidirectional measurement capabilities for units with a frequency range of 4.5 GHz
Frequency range	100 kHz to 4.5 GHz
Bidirectional measurements	yes
Prerequisites	R&S®ZND base unit

R&S®ZND-K6

Full test set, 8.5 GHz	bidirectional measurement capabilities for units with a frequency range of 8.5 GHz
Frequency range	100 kHz to 8.5 GHz
Bidirectional measurements	yes
Prerequisites	R&S®ZND base unit with R&S®ZND-K1


R&S®ZND-K7

This data is valid from +18 °C to +28 °C.

Extended power range		
Power range	with R&S®ZND-K7, without R&S®ZND-B7	
	100 kHz to 8.5 GHz	–45 dBm to +3 dBm
	with R&S®ZND-K7, with R&S®ZND-B7	
	100 kHz to 6.5 GHz	–45 dBm to +10 dBm
	6.5 GHz to 7.5 GHz	–45 dBm to +8 dBm
	7.5 GHz to 8.5 GHz	–45 dBm to +6 dBm

R&S®ZND-K8

Extended frequency range, 8.5 GHz, full test set	frequency range extension for bidirectional units
Frequency range	100 kHz to 8.5 GHz
Bidirectional measurements	yes
Prerequisites	R&S®ZND base unit with R&S®ZND-K5

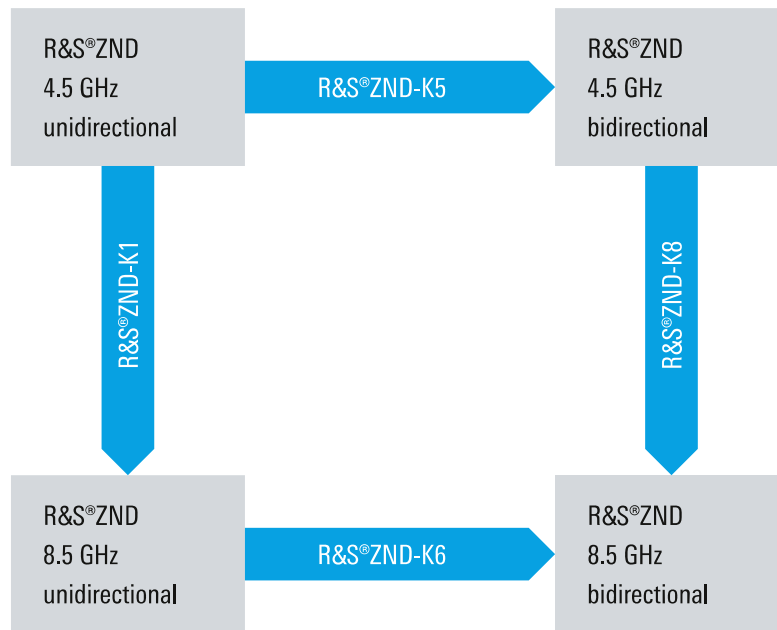

Upgrade options for R&S®ZND base unit

R&S®ZND-B7

This data is valid from +18 °C to +28 °C.

High output power		
Power range	without R&S®ZND-B7, without R&S®ZND-K7	
	100 kHz to 8.5 GHz	–20 dBm to +3.5 dBm
	with R&S®ZND-B7, without R&S®ZND-K7	
	100 kHz to 6.5 GHz	–20 dBm to +10 dBm
	6.5 GHz to 7.5 GHz	–20 dBm to +8 dBm
	7.5 GHz to 8.5 GHz	–20 dBm to +6 dBm

R&S®ZND-B10

GPIO interface		remote control interface in line with IEEE-488, IEC 60625; 24-pin
----------------	--	---

R&S®ZN-B14

Handler I/O	several control and trigger signals, 36-pin Centronics connector, 3.3 V TTL, for controlling external devices, limit checks, sweep signals, etc.	
Keysight handler interface compatibility		type 3
Input signals	pin 2, pin 18	3.3 V TTL, 5 V tolerant
Output signals	pin 3 to 17, pin 19 to 21, pin 30 to 34, pin 36	3.3 V TTL, 5 V tolerant
Input/output signals	pin 22 to 29	3.3 V TTL, 5 V tolerant
+5 V output	pin 35	+5 V, max. 100 mA
Response time of write strobe signal	pin 32	1 µs
Pulse width of write strobe signal	pin 32	1 µs
Pulse width of external trigger signal	pin 18	> 1 µs
Pulse width of sweep end signal	pin 34	> 10 µs

R&S®ZND-K980

Health and utilization monitoring service (HUMS) ^{6, 7}		
Interfaces	protocols and interfaces supported for data readout and display	<ul style="list-style-type: none"> • SNMP (v1, v2c, v3) • REST (JSON) • SCPI • device web
Services	information provided	<ul style="list-style-type: none"> • device information (model, serial number, BIOS, date, time, system, HUMS and software information) • user-defined information tags (e.g. for asset management) • equipment information (hardware, options, software, licenses) • system operating status • instrument security information • service related information (due dates etc.) • mass storage related information • instrument utilization data • device history (event log)


⁶ For details, see application note under: www.rohde-schwarz.com/appnote/GFM336

⁷ For use with common available asset management tools.


General data

Temperature loading		in line with IEC 60068-2-1 and IEC 60068-2-2
	operating temperature range	+5 °C to +40 °C
	storage temperature range	–20 °C to +60 °C
Damp heat		+40 °C at 85 % rel. humidity, in line with IEC 60068-2-30
Altitude	operating environment	max. 2000 m
	storage environment	max. 4500 m
Mechanical resistance	vibration, sinusoidal	5 Hz to 55 Hz, 0.15 mm amplitude constant, 55 Hz to 150 Hz, 0.5 g constant, in line with IEC 60068-2-6
	vibration, random	10 Hz to 300 Hz, acceleration 1.2 g (RMS), in line with IEC 60068-2-64
	shock	40 g shock spectrum, in line with MIL-STD-810E method no. 516.4 procedure I
Calibration interval		1 year
EMC	RF emission	in line with CISPR 11/EN 55011 group 1 class A (for a shielded test setup); instrument complies with the emission requirements stipulated by EN 55011 and EN 61326-1 class A; this means that the instrument is suitable for use in industrial environments
	immunity	in line with EMC Directive 2014/30/EU including: IEC/EN 61326-1 (immunity test requirement for industrial environment, EN 61326-1 table 2), IEC/EN 61326-2-1, IEC/EN 61000-3-2, IEC/EN 61000-3-3
Safety		in line with IEC 61010-1, EN 61010-1 and UL 61010-1, CAN/CSA-C22.2 No.61010-1
Power supply		100 V to 240 V at 50 Hz to 60 Hz and 400 Hz, max. 3 A to 1.25 A respectively
Power consumption		max. 300 W, typ. 120 W
Test mark		VDE, _C CSA _{US} , CE conformity mark
Dimensions	W × H × D	462.5 mm × 239.6 mm × 361.5 mm (18.2 in × 9.4 in × 14.23 in)
Weight		14 kg (30.9 lb)
Shipping weight		19 kg (41.9 lb)


Dimensions (in mm)

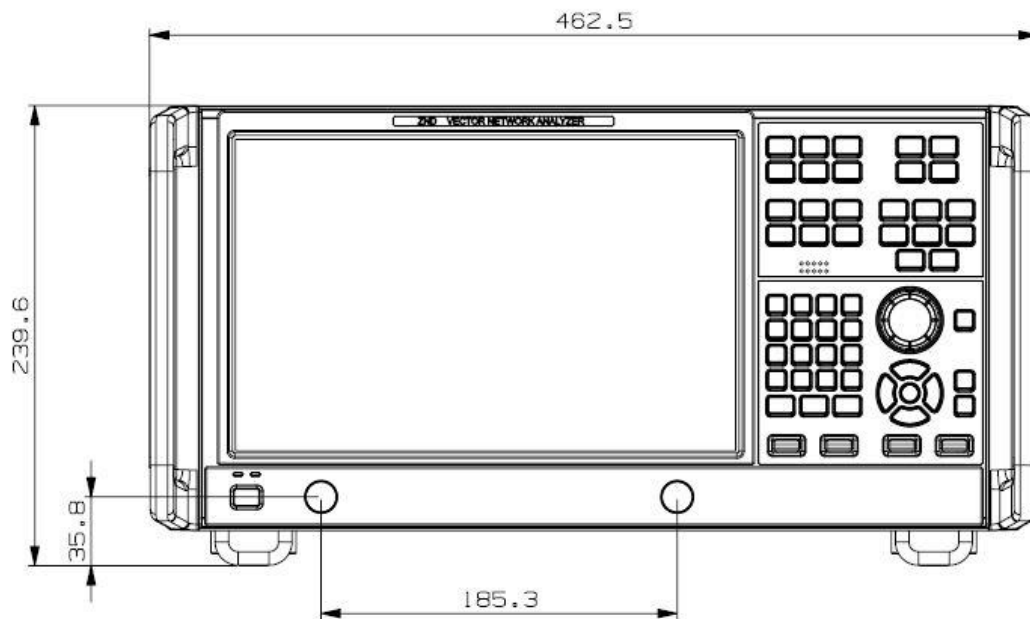

Front view of the R&S®ZND

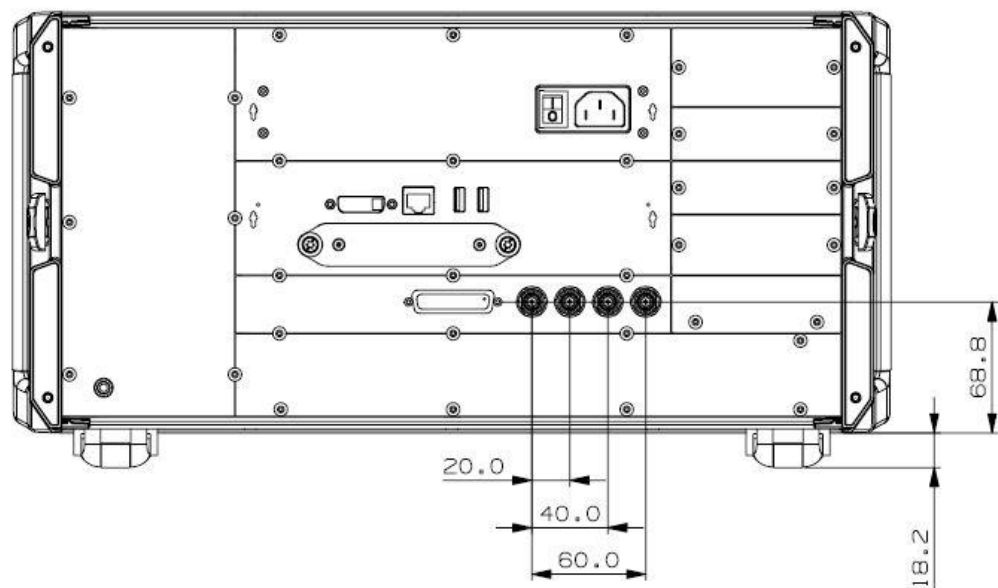

Rear view of the R&S®ZND

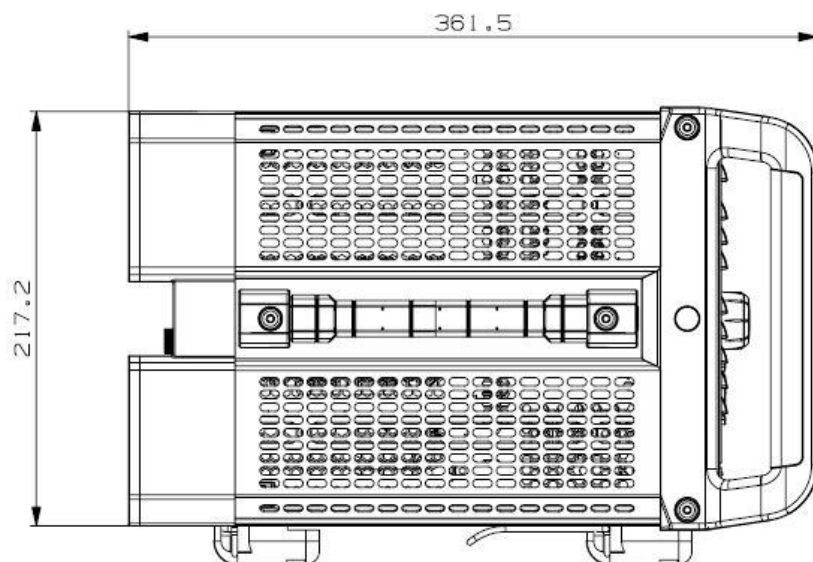

Side view of the R&S®ZND

Ordering information

Designation	Type	Retrofit ⁸	On site ⁹	Order No.
Base unit				
Vector network analyzer, two ports, 4.5 GHz, N	R&S®ZND			1328.5170.92
Options				
Extended frequency range, unidirectional, 8.5 GHz	R&S®ZND-K1		•	1328.5306.02
Time domain analysis (TDR)	R&S®ZND-K2		•	1328.5393.02
Distance-to-fault (DTF)	R&S®ZND-K3		•	1350.5070.02
Full test set, base unit, bidirectional, 4.5 GHz	R&S®ZND-K5		•	1328.5312.02
Full test set, bidirectional, 8.5 GHz	R&S®ZND-K6		•	1328.5329.02
Extended power range for R&S®ZND	R&S®ZND-K7		•	1328.5335.02
Extended frequency range, full test set, bidirectional, 8.5 GHz	R&S®ZND-K8		•	1328.5412.02
1 Millihertz frequency resolution	R&S®ZND-K19		•	1326.8089.02
Easy deembedding	R&S®ZND-K210		•	1328.8670.02
In-situ deembedding	R&S®ZND-K220		•	1328.8686.02
Smart fixture deembedding	R&S®ZND-K230		•	1328.8692.02
Delta-L PCB characterization	R&S®ZND-K231		•	1328.8705.02
Health and utilization monitoring service	R&S®ZND-K980	•	•	1350.5311.02
High output power	R&S®ZND-B7		•	1338.1578.02
GPIB interface	R&S®ZND-B10	•	•	1328.5358.02
Additional removable hard disk, for R&S®ZND with Windows 7	R&S®ZND-B19	•	•	1326.7760.02
Additional removable SSD, for R&S®ZND with Windows 10	R&S®ZND-B19	•	•	1338.1703.02
Handler I/O	R&S®ZN-B14	•	•	1316.2459.02
19" rackmount kit	R&S®ZZA-KN5	•	•	1175.3040.00
Upgrade kit				
Upgrade kit from Windows 7 to Windows 10, for R&S®ZND	R&S®ZND-U10	•		1338.1690.02

Warranty		
Base unit		3 years
All other items ¹⁰		1 year
Service options		
Extended warranty, one year	R&S®WE1	Please contact your local Rohde & Schwarz sales office.
Extended warranty, two years	R&S®WE2	
Extended warranty with calibration coverage, one year	R&S®CW1	
Extended warranty with calibration coverage, two years	R&S®CW2	
Extended warranty with accredited calibration coverage, one year	R&S®AW1	
Extended warranty with accredited calibration coverage, two years	R&S®AW2	

Extended warranty with a term of one and two years (WE1 and WE2)

Repairs carried out during the contract term are free of charge ¹¹. Necessary calibration and adjustments carried out during repairs are also covered.

Extended warranty with calibration coverage (CW1 and CW2)

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs ¹¹ and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

Extended warranty with accredited calibration (AW1 and AW2)

Enhance your extended warranty by adding accredited calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated under accreditation, inspected and maintained during the term of the contract. It includes all repairs ¹¹ and accredited calibration at the recommended intervals as well as any accredited calibration carried out during repairs or option upgrades.

⁸ Option may also be ordered at a later stage.

⁹ Option may be installed by the customer on site.

¹⁰ For options that are installed, the remaining base unit warranty applies if longer than 1 year. Exception: all batteries have a 1 year warranty.

¹¹ Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.

Service that adds value

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

Rohde & Schwarz

The Rohde & Schwarz technology group is among the trailblazers when it comes to paving the way for a safer and connected world with its leading solutions in test and measurement, technology systems, and networks and cybersecurity. Founded more than 85 years ago, the group is a reliable partner for industry and government customers around the globe. The independent company is headquartered in Munich, Germany and has an extensive sales and service network with locations in more than 70 countries.

www.rohde-schwarz.com

Sustainable product design

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management
ISO 9001

Certified Environmental Management
ISO 14001

Rohde & Schwarz training

www.training.rohde-schwarz.com

Rohde & Schwarz customer support

www.rohde-schwarz.com/support



R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG
Trade names are trademarks of the owners
PD 3607.0381.22 | Version 06.00 | June 2021 (jr)
R&S®ZND Vector Network Analyzer
Data without tolerance limits is not binding | Subject to change
© 2014 - 2021 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany

3607038122
3607.0381.22 06.00 PDF/PDW 1 en