

HFE1600 Series

1600W 1U Front End Power Supplies



The HFE1600 AC-DC industrial power supplies can be operated in a hot-swap redundant configuration, or used to provide up to 7,600W of bulk power. Up to five power supplies can be fitted in a variety of 19" 1U high racks, for configuration as a single or dual output. The HFE supplies have internal ORing MOSFETs and current share for automatic parallel operation. Communication is possible with the power supplies using the optional isolated PMBus™ (I²C) interface or a plug-in LAN module. AC fail, DC good, remote output adjust, remote on/off and a 12V auxiliary output are fitted as standard.

Features

- Internal ORing MOSFET and Current Share
- Up to 7600W in 1U Rack
- Full Array of Signals Available
- PMBus™ (I²C) and LAN options
- Analog Output Adjustment

Benefits

- Suitable For N+1 Redundancy
- Utilizes Less System Space
- Easy Remote Monitoring
- Industry Standard Communication Interfaces
- Simple External Resistance or Voltage Connection

Model Selector

Model	Output Voltage (V)	Adjustment Range (V) ⁽¹⁾	Max Current (A) (Vin>170Vac)	Max Power (W) (Vin>170Vac)	Max Current (A) (100<Vin<170Vac) ⁽²⁾	Max Power (W) (100<Vin<170Vac) ⁽²⁾
HFE1600-12	12	9.6 - 13.2	133	1596	100	1200
HFE1600-24	24	19.2 - 29	67	1608	50	1200
HFE1600-32	32	25.6 - 38.4	47	1500	37.5	1200
HFE1600-48	48	38.4 - 58	33	1584	25	1200

HFE1600-	12	/	S
	Output voltage 12, 24, 32, 48		blank No PMBus™ / I²C S PMBus™ / I²C interface

Model Selector (Racks and LAN)

Model	Description	Maximum Rack Current
HFE1600-S1U	Five slot 19" rack, IEC320-C16 input connectors (5)	266A each side (532A total)
HFE1600-S1U-TB	Five slot 19" rack, terminal block input connectors (5)	266A each side (532A total)
HFE1600/BP	One slot blanking panel, four provided with each rack	-
HFE/C15U	AC Power cord, 2.0m long, one per power supply required	-
HFE1600-D1U	Four slot (two isolated pairs), dual output 19" rack, IEC320 input	266A each side (532A total)
HFE1600-D1U-TB	Four slot (two isolated pairs), dual output 19" rack, terminal block input	266A each side (532A total)
HFE1600-LAN	Plug in LAN module. Takes up one rack slot. For use with /S power supplies only.	-

Specifications						
Model		HFE1600-12		HFE1600-24	HFE1600-32	HFE1600-48
Input						
Input Voltage range (2)	Vac	85 - 265				
Input Frequency	Hz	47 - 63				
Input Current (Max) 115/230Vac	A	14.2 / 8.1				
Inrush Current	A	<35				
Leakage Current	mA	Less than 0.75/1.5mA at 100/230Vac, 60Hz				
Power Factor Correction	-	EN61000-3-2, PF >0.98 at full load				
Harmonic Compliance	-	Meets IEC61000-3-2				
Hold up time	ms	>10ms, 100/230Vac input, 80% loading				
Efficiency (4)	%	87 / 90	88 / 90	88 / 90	89 / 92	
Conducted & Radiated EMI	-	EN55022 & FCC part 15; Conducted class B, Radiated class A				
Line Dip	-	Complies with SEMI F47 (200Vac line only)				
Immunity	-	See immunity section				
Safety Certifications and Markings	-	IEC/UL/CSA/EN62368-1, 60950-1, CE Mark and UKCA Mark				

Immunity					
Test	Standard	Test Level	Criteria	Notes	
ESD	EN61000-4-2	2,3	B	-	
Radiated Susceptibility	EN61000-4-3	2	A	-	
Electrical Fast Transient Burst	EN61000-4-4	2	B	-	
Surge	EN61000-4-5	3,4	B	-	
Conducted Susceptibility	EN61000-4-6	2	A	-	
Magnetic Fields	EN61000-4-8	4	A	-	
Voltage Dips and Input Interruptions	EN61000-4-11	>95% for 0.5 cycles	B	-	
		30% for 25/30 cycles	C	-	
		>95% for 250/300 cycles	C	-	


Specifications					
Model		HFE1600-12	HFE1600-24	HFE1600-32	HFE1600-48
Output					
Line Regulation	mV	30	60	80	120
Load Regulation	mV	60	120	160	240
External Load Capacitance	uF/A	1000			
Ripple & Noise (1)	mV	240	240	320	480
Temperature Coefficient	%/°C	<0.02			
Minimum Load	-	No minimum load required			
Overcurrent Protection	%	105-120			
Overvoltage Protection (1)	%	110% (Tracking). Cycle AC to reset or utilize Remote On/Off			
Overtemperature Protection (1)	-	Shutdown with automatic reset. Warning signal provided.			
Remote Sense Compensation	V/wire	0.25	0.5	0.75	1.0
Remote On/Off	-	Unit ON: 0-0.6V or short, OFF: 2-15V or open circuit			
Remote Adjust	-	By either external 0-5V signal or 1k ohm potentiometer			
AC Fail Signal	-	Open Collector, ON when AC is within 85-270Vac			
DC Good Signal	-	Open Collector, ON when output is above 85 to 95% of setpoint (tracking)			
Auxiliary Output	-	11.2 - 12.5V, 0.5A, 240mV ripple and noise			
Communication	-	Optional isolated PMBus™ (I²C) interface (/S suffix) or plug-in LAN module. See model selectors			
Indicators	-	DC OK - Green- >90% ±5% of set output voltage; AC OK - Green - 85 to 270Vac ; Green / Red LED			
Parallel Operation (1)	-	Yes, single wire current share, up to 90% accuracy (load dependant), up to 10 units			

Specifications					
Model		HFE1600-12	HFE1600-24	HFE1600-32	HFE1600-48
Environmental					
Operating Temperature	°C	-10 to +50: 100% load; +50 to +60 derate: 2%/°C of load; +60 to +70 derate: 2.5%/°C of load. For models with reverse air contact factory.			
Storage Temperature	°C	-30 to +85			
Humidity (non condensing)	%RH	Operating: 10 - 90, Storage: 10 - 95			
Cooling	-	Internal variable speed fans. Airflow enters from the front. Contact factory for reverse airflow option.			
Altitude	m	3000 max. Derate output current 2%/100m above 2000m.			
Withstand Voltage	-	I/P to O/P 3kVac, I/P to GND 2kVac. O/P to GND: HFE1600-12,-24V 500Vac, HFE1600-48 2250Vdc 1 min, (POE)			
Isolation Resistance	MΩ	>100 at 25°C, 70%RH & Output to Ground 500Vdc			
Vibration (Non-operating)	-	Meets IEC60068-2-64 (Basic Transportation)			
Shock (Non-operating)	-	Meets IEC60068-2-27 (Basic Transportation)			
Other					
Weight (Typ)	g	Power Supply: 1550, Rack: 4800			
Size (LxWxH)	mm	Power Supply: 300 x 85 x 41; Rack: 365 x 445 x 43.6			
Size (LxWxH)	Inches	Power Supply: 11.8 x 3.35 x 1.61; Rack: 14.4 x 17.5 x 1.72			
PMBus™ / I²C Interface (1)	-	Isolated from output, Add suffix /S, PMBus™ compatible			
MTBF - Telcordia	Hours	210,143			
Warranty	Years	Three			


Notes

- (1) See installation manual for detailed specifications and test methods
- (2) Derate output power linearly 1%/V from 100Vac to 85Vac input
- (3) Reverse air - contact factory
- (4) At 75% load, 115 / 230Vac input


Outline Drawing HFE1600

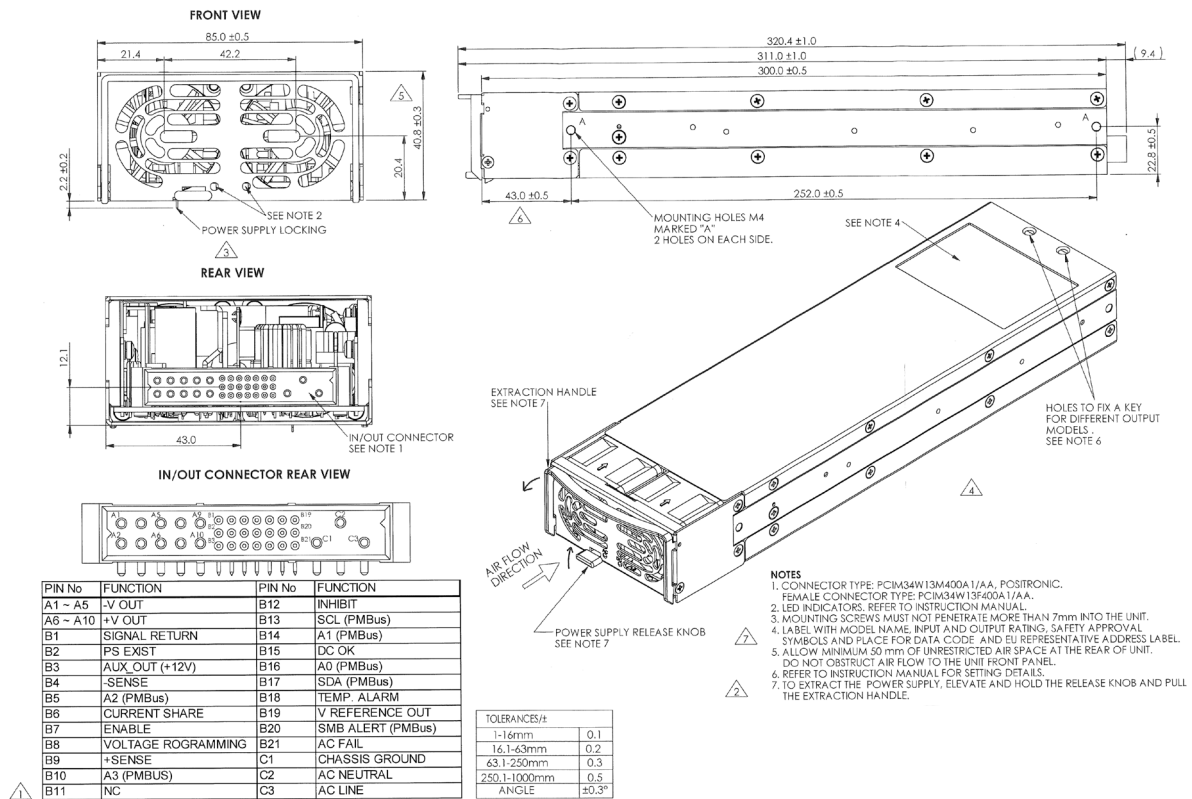


Outline Drawing HFE1600-S1U

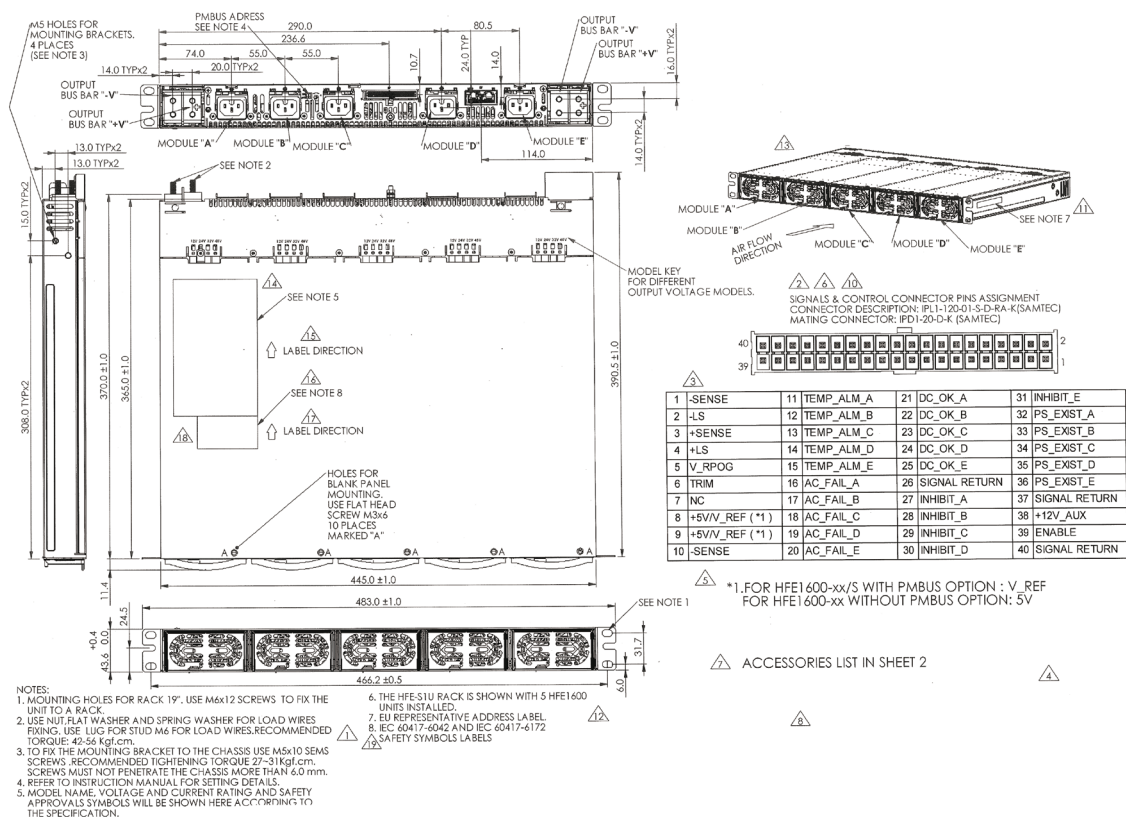


Outline Drawing HFE1600-S1U-TB

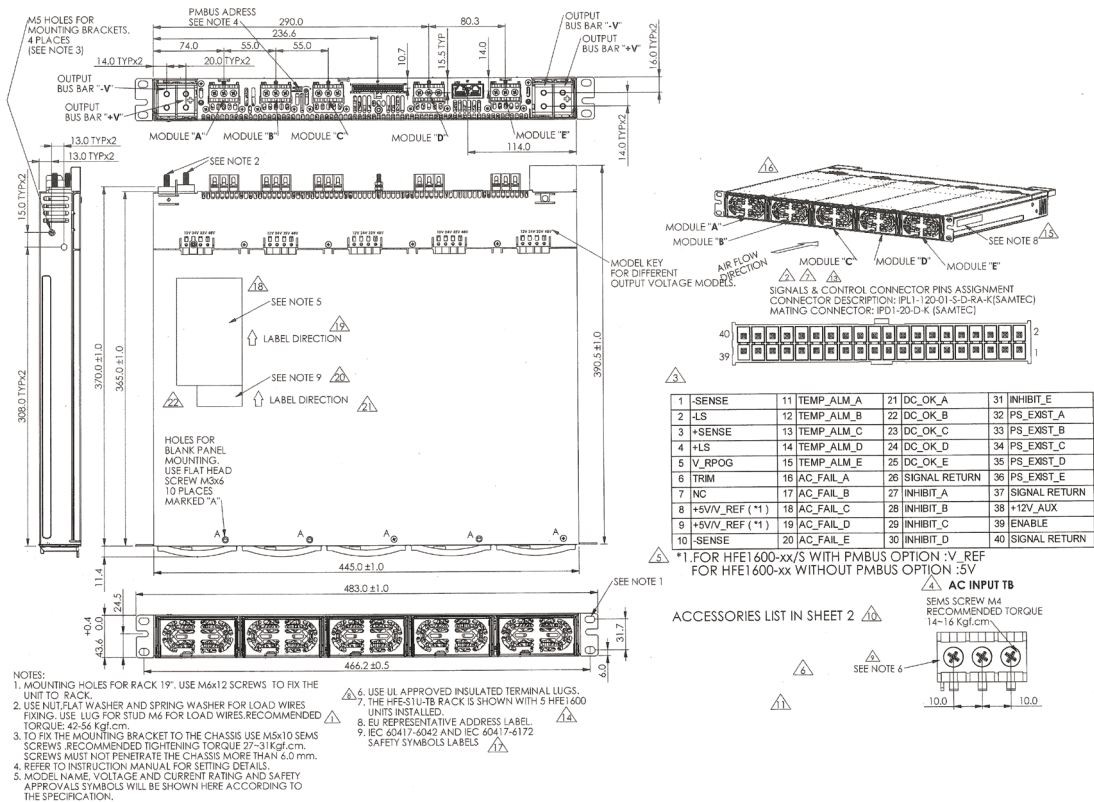

Outline Drawing HFE1600-D1U

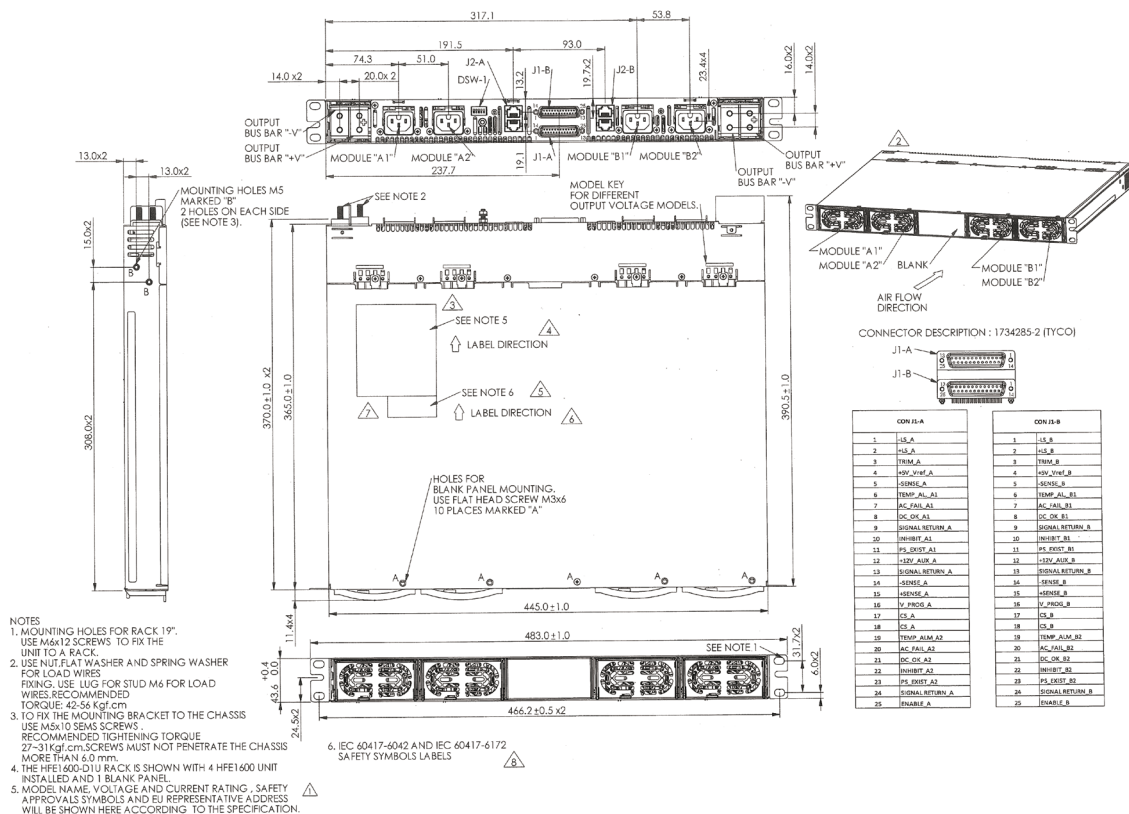

Outline Drawing HFE1600-D1U-TB

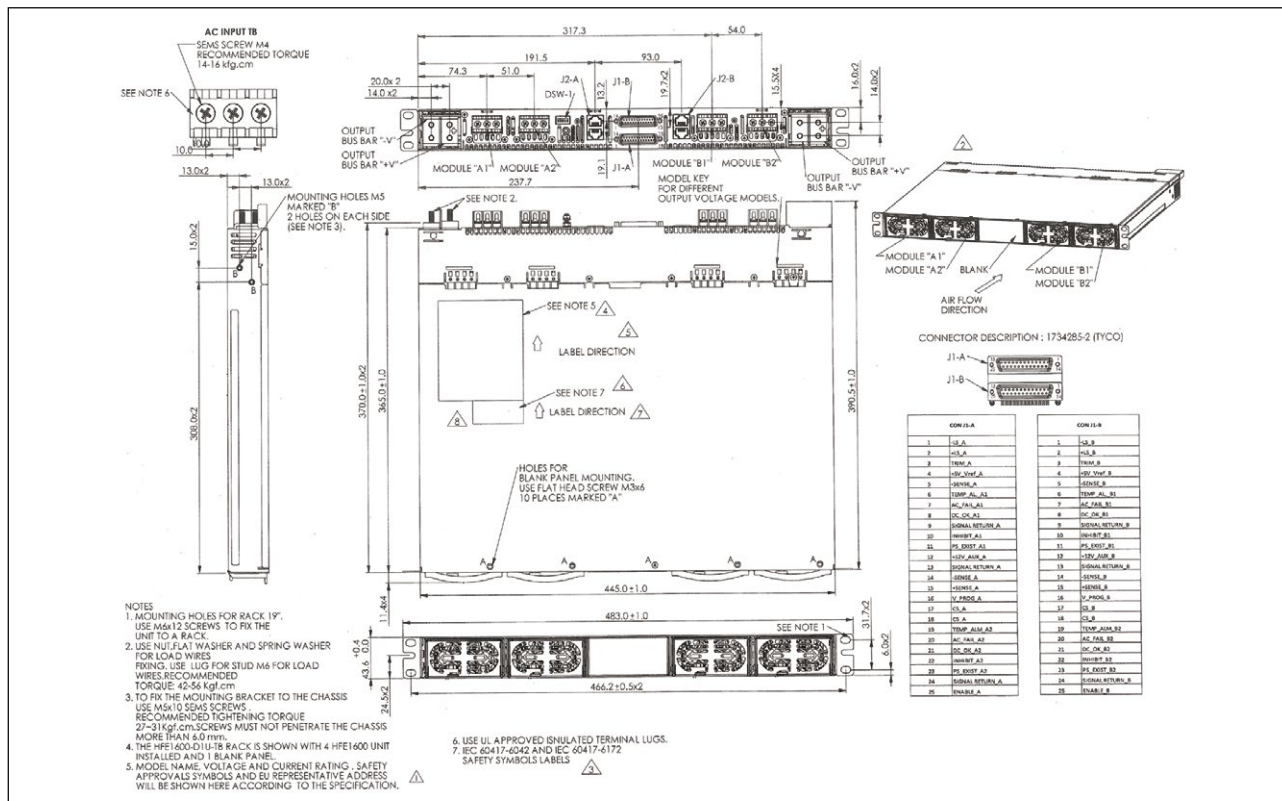

Outline Drawing HFE1600-LAN

