

dataTec

Mess- und Prüftechnik. Die Experten.



**Ihr Ansprechpartner /
Your Partner:**

dataTec AG

E-Mail: info@datatec.eu

>>> www.datatec.eu

3 ϕ

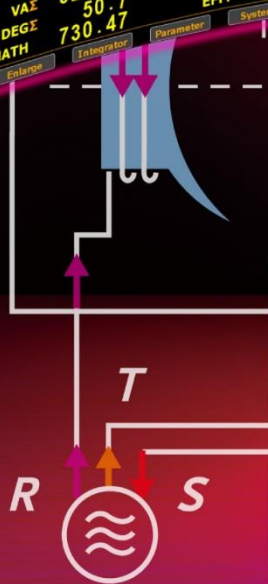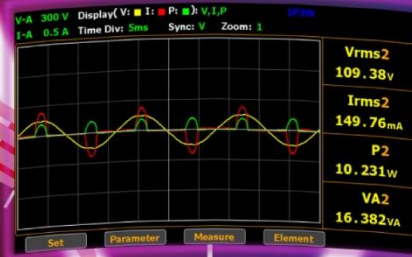

GPM-8320/8330 **Digital Power Meter**

FEATURES:

- ✗ 5" TFT LCD
- ✗ Voltage/Current Test Freq. Bandwidth: DC, 0.1Hz~ 100kHz
- ✗ **Waveform Display** : V (Voltage), I (Current), P (Wattage)
- ✗ Distorted wave Current/Voltage measurement: full range for CF=3, and half range for CF=6 (or 6A)
- ✗ Meeting IEC 61000-4-7 harmonic measurement (50/60Hz)
- ✗ **Wiring selecting button (1P3W,3P3W,3P4W,3V3A)**
- ✗ Harmonic measurement & analysis up to **50 orders**
- ✗ Auto ranging function for Integration mode
- ✗ Screen Capture through USB host
- ✗ Provide **external current sensor input (EXT1/EXT2)**
- ✗ Standard Interface: RS-232C, USB device/ host, LAN
- ✗ Optional Interface: GPM-DA12 - GPIB + Digital I/O (factory installed only)

GW INSTEK

Simply Reliable

REAR PANEL



GPM-8320 with opt. GPM-DA12



GPM-8330 with opt. GPM-DA12

SPECIFICATIONS

Model	GPM-8320	GPM-8330
Channel	2	3
Parameters	Vrms, Vmn, Vdc, Vac, Irms, Idc, Iac, P, VA, VAR, PF, CFI, CFV, DEG, IHz, VHz, V+pk, V-pk, I+pk, I-pk, P+pk, P-pk, THDI, THDV, MATH, MCR	
Input		
Voltage Range	15V/30V/60V/150V/300V/600V/1000Vrms (CF=3), 7 range	
Current Range	0.5A/1A/2A/5A/10A/20A (CF=3), 6 range	
Accuracy	DC, 0.1Hz to 45Hz : ± (0.1% of reading + 0.2% of range) 45Hz to 66Hz : ± (0.1 % of reading + 0.05 % of range) 66Hz to 1kHz : ± (0.1 % of reading + 0.2 % of range) 1kHz to 10kHz : ± (0.07 *f) % of reading + 0.3% of range 10kHz to 100kHz : ± (0.5 % of reading + 0.5 % of range) ± [(0.04x(f-10))% of reading	
Harmonics Accuracy	10Hz to 45Hz : 0.15% of reading+ 0.35% of range 45Hz to 440Hz : 0.15% of reading+ 0.35% of range 440Hz to 1.2kHz : 0.15% of reading+ 0.35% of range	
Voltage Input Resistance	2MΩ	
Power		
Range	7.5W ~ 20kW (42 ranges)	
Accuracy	DC : ± (0.1% of reading + 0.2% of range) 0.1Hz to 45Hz : ± (0.3% of reading + 0.2% of range) 45Hz to 66Hz : ± (0.1 % of reading + 0.05 % of range) 66Hz to 1kHz : ± (0.2 % of reading + 0.2 % of range) 1kHz to 10kHz : ± (0.1 % of reading + 0.3 % of range) ± [(0.067x(f-1))% of reading] 10kHz to 100kHz : ± (0.5 % of reading + 0.5 % of range) ± [(0.09x(f-10))% of reading]	
Frequency		
Range	DC, 0.1Hz ~ 100kHz	
Accuracy	± (0.06% of reading)	
Frequency Source	Voltage or Current source selectable	
Others		
Display Resolution	5 Digits	
Display Update Rate	0.1s / 0.25s / 0.5s / 1s / 2s / 5s / 10s / 20s	
Interface	Standard: RS-232C/USB host & device/LAN Option: mini GPIB+Digital IO (GPM-DA12)	
Power Source	100~240V±10%, 50/60Hz (Consumption: 35VA)	
Dimension & Weight	GPM-8320: 220 (W) x 132 (H) x 402.5 (D) mm; Approx. 3.4 kg GPM-8330: 220 (W) x 132 (H) x 402.5 (D) mm; Approx. 3.85 kg	

Specifications subject to change without notice.



**Ihr Ansprechpartner /
Your Partner:**

dataTec AG

E-Mail: info@datatec.eu

>>> www.datatec.eu



Website

Facebook

LinkedIn

GW INSTEK

Simply Reliable