
cDAQ™-9189

Specifications



Mess- und Prüftechnik. Die Experten.

**Ihr Ansprechpartner /
Your Partner:**

dataTec AG
E-Mail: info@datatec.eu
>>> www.datatec.eu



Authorized
Distributor

2025-06-11



Contents

cDAQ-9189 Specifications 3

cDAQ-9189 Specifications

cDAQ-9189 Specifications

These specifications apply to the cDAQ-9189.

Revision History

Version	Date changed	Description
376607A-01	May 2017	Initial release.
376607B-01	Jan 2024	Certification update
376607C-01	Mar 2024	Specifications update
376607D-01	Dec 2024	Specifications update
376607E-01	June 2025	Bugfix

Looking For Something Else?

For information not found in the specifications for your product, such as operating instructions, browse ***Related Information***.

Definitions

Warranted Specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

Characteristics describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- **Typical**—describes the performance met by a majority of models.
- **Nominal**—describes an attribute that is based on design, conformance testing, or supplemental testing.

Values are ***Typical*** unless otherwise noted.


Conditions

Specifications are valid at 25 °C unless otherwise noted.

cDAQ-9189 Front Panel

Refer to the front panel diagram to understand the connectors, LEDs, and other features of the cDAQ-9189.

Figure 2. cDAQ-9189 Front Panel

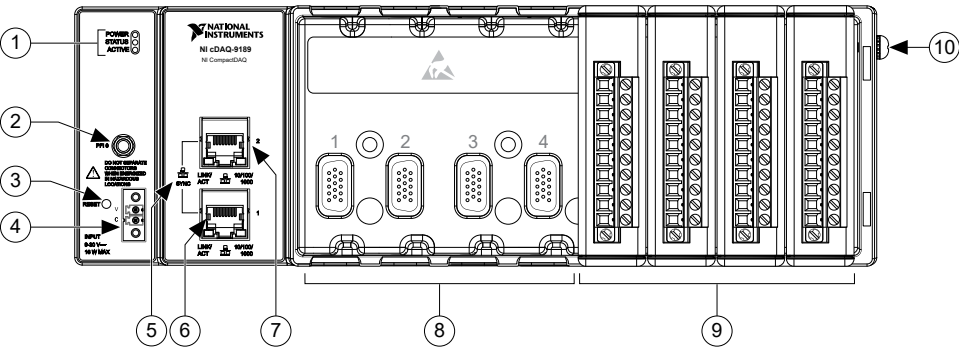

- 1. POWER, STATUS, and ACTIVE LEDs
- 2. PFI 0 SMB Connector
- 3. Reset Button
- 4. Power Connector
- 5. SYNC Logo
- 6. Ethernet Port 1, 10/100/1000 and LINK/ACT LEDs
- 7. Ethernet Port 2, 10/100/1000 and LINK/ACT LEDs
- 8. Module Slots
- 9. Installed C Series Modules
- 10. Chassis Grounding Screw

Physical Characteristics

Table 1. Physical Characteristics

Dimensions (unloaded)	272.8 mm × 88.1 mm × 62.3 mm (10.74 in. × 3.47 in. × 2.45 in.) For more information, visit ni.com/dimensions and search by module number.
--------------------------	--

Weight (unloaded)	1,065.9 g (37.6 oz)
-------------------	---------------------

Power Connector

Table 2. Power connector screw terminal wiring

Gauge	0.2 mm ² to 2.1 mm ² (24 AWG to 14 AWG) copper conductor wire
Wire strip length	6 mm (0.24 in.) of insulation stripped from the end
Temperature rating	85 °C
Torque for screw terminals	0.20 N · m to 0.25 N · m (1.8 lb · in. to 2.2 lb · in.)
Wires per screw terminal	One wire per screw terminal

Table 3. Power connector securement

Securement type	Screw flanges provided
Torque for screw flanges	0.3 N · m to 0.4 N · m (2.7 lb · in. to 3.5 lb · in.)

Analog Input

Table 4. Analog Input

Input FIFO size	127 samples per slot
Maximum sample rate ¹	Determined by the C Series module or modules
Timing accuracy ²	50 ppm of sample rate
Internal base clocks	80 MHz, 20 MHz, 13.1072 MHz, 12.8 MHz, 10 MHz, 100 kHz
Number of channels supported	Determined by the C Series module or modules

Analog Output

Table 5. Number of channels supported (hardware-timed task)

Regeneration	Channels Supported
Onboard regeneration	16

1. Performance dependent on type of installed C Series module and number of channels in the task.
2. Does not include group delay. For more information, refer to the documentation for each C Series module.

Regeneration	Channels Supported
Non-regeneration	Determined by the C Series module or modules

Table 6. Number of channels supported (non-hardware-timed task)

Channels supported	Determined by the C Series module or modules
--------------------	--

Table 7. Maximum update rate

Onboard regeneration	1.6 MS/s (multi-channel, aggregate)
Non-regeneration	Determined by the C Series module or modules

Table 8. Analog Output Timing

Timing accuracy	50 ppm of sample rate
Internal base clocks	80 MHz, 20 MHz, 13.1072 MHz, 12.8 MHz, 10 MHz, 100 kHz

Table 9. Output FIFO size

Onboard regeneration	8,191 samples shared among channels used
Non-regeneration	Determined by the C Series module or modules

Table 10. Analog Output Waveform

AO waveform modes	Non-periodic waveform, periodic waveform regeneration mode from onboard memory, periodic waveform regeneration from host buffer including dynamic update
-------------------	--

Digital Waveform Characteristics

Table 11. Waveform acquisition (DI) FIFO

Parallel modules	511 samples per slot
Serial modules	63 samples per slot

Table 12. Waveform generation (DO) FIFO (parallel modules)

Slots	Samples per slot
Slots 1 to 4	2,047 samples per slot
Slots 5 to 8	1,023 samples per slot



Note When parallel modules in a digital task are in slots 1 through 4, FIFO is 2,047 samples per slot for all slots. When any parallel module in a digital task is in slots 5 through 8, FIFO is 1,023 samples per slot for all eight slots.

Table 13. Waveform generation (DO) FIFO (serial modules)

Slots	Samples per slot
Slots 1 to 8	63 samples per slot

Table 14. Digital input sample clock frequency

Streaming to application memory	System-dependent
Finite	0 MHz to 10 MHz

Table 15. Digital output sample clock frequency

Streaming to application memory	System-dependent
Regeneration from FIFO	0 MHz to 10 MHz
Finite	0 MHz to 10 MHz

Table 16. Digital waveform timing

Timing accuracy	50 ppm
Internal base clocks	80 MHz, 20 MHz, 13.1072 MHz, 12.8 MHz, 10 MHz, 100 kHz

General-Purpose Counters/Timers

Table 17. General-Purpose Counter/Timers

Number of counters/timers	4
Resolution	32 bits
Counter measurements	Edge counting, pulse, semi-period, period, two-edge separation, pulse width
Position measurements	X1, X2, X4 quadrature encoding with Channel Z reloading; two-pulse encoding
Output applications	Pulse, pulse train with dynamic updates, frequency division, equivalent time sampling
Internal base clocks	80 MHz, 20 MHz, 13.1072 MHz, 12.8 MHz, 10 MHz, 100 kHz
External base clock frequency	0 MHz to 20 MHz
Base clock accuracy	50 ppm
Output frequency	0 MHz to 20 MHz
Inputs	Gate, Source, HW_Arm, Aux, A, B, Z, Up_Down
Routing options for inputs	Any module PFI, chassis PFI, analog trigger, many internal signals
FIFO	Dedicated 127-sample FIFO

Frequency Generator

Table 18. Frequency generator

Number of channels	1
Base clocks ³	20 MHz, 10 MHz, 100 kHz
Divisors	1 to 16 (integers)
Base clock accuracy	50 ppm
Output	Any chassis PFI or module PFI terminal

3. Base clocks can be synchronized with other chassis using the network synchronization feature.

Module PFI Characteristics

Table 19. Module PFI Characteristics

Functionality	Static digital input, static digital output, timing input, and timing output
Timing output sources ⁴	Many analog input, analog output, counter, digital input, and digital output timing signals
Timing input frequency	0 MHz to 20 MHz
Timing output frequency	0 MHz to 20 MHz

Chassis PFI Characteristics

Table 20. General Chassis PFI Characteristics

Maximum input or output frequency	1 MHz
Cable length	3 m (10 ft)
Cable impedance	50 Ω
PFI 0 connector	PFI 0 connector
Power-on state	High impedance

Table 21. Input/Output Voltage Protection

Voltage	Minimum	Maximum
Input	-20 V	25 V
Output	-15 V	20 V

Table 22. Maximum operating conditions

I _{OL} output low current	8 mA maximum
I _{OH} output high current	-8 mA maximum



Notice Stresses beyond those listed under **Maximum operating**

4. Actual available signals are dependent on type of installed C Series module.

conditions may cause permanent damage to the chassis.

Table 23. DC Input Characteristics

Voltage	Minimum	Maximum
Positive going threshold	1.59 V	2.09 V
Negative going threshold	1.00 V	1.37 V
Hysteresis	0.54 V	0.85 V

Table 24. DC Output Characteristics—High Voltage

Conditions	Minimum	Maximum
—	—	5.25 V
Sourcing 100 μ A	4.65 V	—
Sourcing 2 mA	3.60 V	—
Sourcing 3.5 mA	3.44 V	—

Table 25. DC Output Characteristics—Low Voltage

Conditions	Minimum	Maximum
Sinking 100 μ A	—	0.10 V
Sinking 2 mA	—	0.64 V
Sinking 3.5 mA	—	0.80 V

Digital Triggers

Table 26. Digital triggers

Source	Any chassis PFI or module PFI terminal
Polarity	Software-selectable for most signals
Analog input function	Start Trigger, Reference Trigger, Pause Trigger, Sample Clock, Sample Clock Timebase
Analog output function	Start Trigger, Pause Trigger, Sample Clock, Sample Clock Timebase

Counter/timer function	Gate, Source, HW_Arm, Aux, A, B, Z, Up_Down
------------------------	---

Module I/O States

Table 27. Module I/O States

At power-on	Module-dependent. Refer to the documentation for each C Series module.
-------------	--

Time-Based Triggers and Timestamps

Table 28. General Time-Based Triggers and Timestamps

Number of time-based triggers	5
Number of timestamps	4

Table 29. Analog input

Time-based triggers	Start Trigger, Sync Pulse
Timestamps	Start Trigger, Reference Trigger, First Sample

Table 30. Analog output

Time-based triggers	Start Trigger, Sync Pulse
Timestamps	Start Trigger, First Sample

Table 31. Digital input

Time-based triggers	Start Trigger
Timestamps	Start Trigger, Reference Trigger, First Sample

Table 32. Digital output

Time-based triggers	Start Trigger
Timestamps	Start Trigger, First Sample

Table 33. Counter/timer input

Time-based triggers	Arm Start Trigger
Timestamps	Arm Start Trigger

Table 34. Counter/timer output

Time-based triggers	Start Trigger, Arm Start Trigger
Timestamps	Start Trigger, Arm Start Trigger

Network Interface

Table 35. Network interface

Network protocols	TCP/IP, UDP
Network ports used	HTTP:80 (configuration only), TCP:3580; UDP:5353 (configuration only), TCP:5353 (configuration only); TCP:31415; UDP:7865 (configuration only), UDP:8473 (configuration only)
Network IP configuration	DHCP + Link-Local, DHCP, Static, Link-Local
High-performance data streams	7
Data stream types available	Analog input, analog output, digital input, digital output, counter/timer input, counter/timer output, NI-XNET ⁵
Default MTU size	1,500 bytes

Ethernet

Table 36. Ethernet

Number of ports	2 ports, internally switched ⁶
Network interface	1000 Base-TX, full-duplex; 1000 Base-TX, half-duplex; 100 Base-TX, full-duplex, 100 Base-TX, half-duplex; 10 Base-T, full-duplex; 10 Base-T, half-duplex
Communication rates	10/100/1,000 Mb/s, auto-negotiated
Maximum cabling distance	100 m/segment

5. When a session is active, CAN or LIN (NI-XNET) C Series modules use a total of two data streams regardless of the number of NI-XNET modules in the chassis.
6. This allows for line topologies or network redundancy.

Maximum hops per line ⁷	15
------------------------------------	----

Timing and Synchronization

Table 37. Timing and synchronization

Protocol	IEEE 802.1AS for network synchronization over 1000 Base-TX, full-duplex
Network synchronization accuracy ⁸	<1 μ s
Network synchronization accuracy with optimized configuration ⁹	<100 ns



Note IEEE 1588 protocol is supported in NI-DAQmx 18.1 and later. When configured to use IEEE 1588, performance of synchronization may vary from these specifications.

Safety Voltages

Connect only voltages that are within these limits.

Table 38. Safety voltages

V terminal to C terminal	30 V maximum, Measurement Category I
--------------------------	--------------------------------------

Measurement Category



Caution Do not connect the product to signals or use for measurements within Measurement Categories II, III, or IV.

- 7. With default software configuration. For information about creating reliable Ethernet-based systems, visit ni.com/info and enter Info Code `cdagenet`.
- 8. I/O synchronization is system-dependent. For information about network synchronization accuracy, visit ni.com/info and enter Info Code `syncacc`.
- 9. I/O synchronization is system-dependent. Assumes a system containing one hop with optimized C Series module selection. For information about achieving high accuracy synchronization, visit ni.com/info and enter Info Code `cdaqsync`.



Attention Ne pas connecter le produit à des signaux dans les catégories de mesure II, III ou IV et ne pas l'utiliser pour effectuer des mesures dans ces catégories.



Warning Do not connect the product to signals or use for measurements within Measurement Categories II, III, or IV, or for measurements on MAINS circuits or on circuits derived from Overvoltage Category II, III, or IV which may have transient overvoltages above what the product can withstand. The product must not be connected to circuits that have a maximum voltage above the continuous working voltage, relative to earth or to other channels, or this could damage and defeat the insulation. The product can only withstand transients up to the transient overvoltage rating without breakdown or damage to the insulation. An analysis of the working voltages, loop impedances, temporary overvoltages, and transient overvoltages in the system must be conducted prior to making measurements.



Mise en garde Ne pas connecter le produit à des signaux dans les catégories de mesure II, III ou IV et ne pas l'utiliser pour des mesures dans ces catégories, ou des mesures sur secteur ou sur des circuits dérivés de surtensions de catégorie II, III ou IV pouvant présenter des surtensions transitoires supérieures à ce que le produit peut supporter. Le produit ne doit pas être raccordé à des circuits ayant une tension maximale supérieure à la tension de fonctionnement continu, par rapport à la terre ou à d'autres voies, sous peine d'endommager et de compromettre l'isolation. Le produit peut tomber en panne et son isolation risque d'être endommagée si les tensions transitoires dépassent la surtension transitoire nominale. Une analyse des tensions de fonctionnement, des impédances de boucle, des surtensions temporaires et des surtensions transitoires dans le système doit être effectuée avant de procéder à des mesures.

Measurement Category I is for measurements performed on circuits not directly connected to the electrical distribution system referred to as **MAINS** voltage. MAINS is a hazardous live electrical supply system that powers equipment. This category is for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of

equipment, circuits powered by regulated low-voltage sources, and electronics.

**Note** Measurement Categories CAT I and CAT O are equivalent. These test and measurement circuits are for other circuits not intended for direct connection to the MAINS building installations of Measurement Categories CAT II, CAT III, or CAT IV.

Power Requirements

**Note** Some C Series modules have additional power requirements. For more information about C Series module power requirements, refer to the documentation for each C Series module.

**Note** Sleep mode for C Series modules is not supported in the cDAQ-9189.

**Note** When operating the cDAQ-9189 in hazardous locations, you must use the power connector with an external power supply rated for hazardous locations. The power supply included in the cDAQ-9189 kit is intended only for desktop use. For all other applications use the included 2-position power connector plug and a power supply rated for your application power requirements. Visit ni.com to find hazardous locations-certified power supplies.

Table 39. Power requirements

Voltage input range	9 V to 30 V (measured at the cDAQ-9189 power connector)
Maximum power consumption ¹⁰	16 W

**Note** The maximum power consumption specification is based on a fully populated system running a high-stress application at elevated ambient temperature and with all C Series modules consuming the maximum allowed power.

10. Includes maximum 1 W module load per slot across rated temperature and product variations.

Table 40. Power connector

Power input connector	2 positions 3.5 mm pitch mini-combicon screw terminal with screw flanges, Sauro CTMH020F8-0N002
Power input mating connector	Sauro CTF020V8, Phoenix Contact 1714977, or equivalent

Environmental Guidelines



Notice Failure to follow the mounting instructions in the product documentation can cause temperature derating.



Notice This product is intended for use in indoor applications only. Use NI-9917 and NI-9918 industrial enclosures to protect the device in harsh, dirty, or wet environments.

Environmental Characteristics

Table 41. Temperature

Operating	-40 °C to 70 °C ¹¹
Storage	-40 °C to 85 °C

Table 42. Humidity

Operating	10% to 90% RH, noncondensing
Storage	5% to 95% RH, noncondensing

Table 43. Ingress Protection

Ingress protection	IP40
--------------------	------

Table 44. Pollution Degree

Pollution degree	2
------------------	---

11. When operating the cDAQ-9189 in temperatures below 0 °C, you must use the PS-15 power supply or another power supply rated for below 0 °C.

Table 45. Maximum Altitude

Maximum altitude	5,000 m
------------------	---------

Table 46. Shock and Vibration

Operating vibration - Random	5 g RMS, 10 Hz to 500 Hz
Operating vibration - Sinusoidal	5 g, 10 Hz to 500 Hz
Operating shock	30 g, 11 ms half sine; 50 g, 3 ms half sine; 18 shocks at 6 orientations

To meet these shock and vibration specifications, you must panel mount the system.