


Datasheet

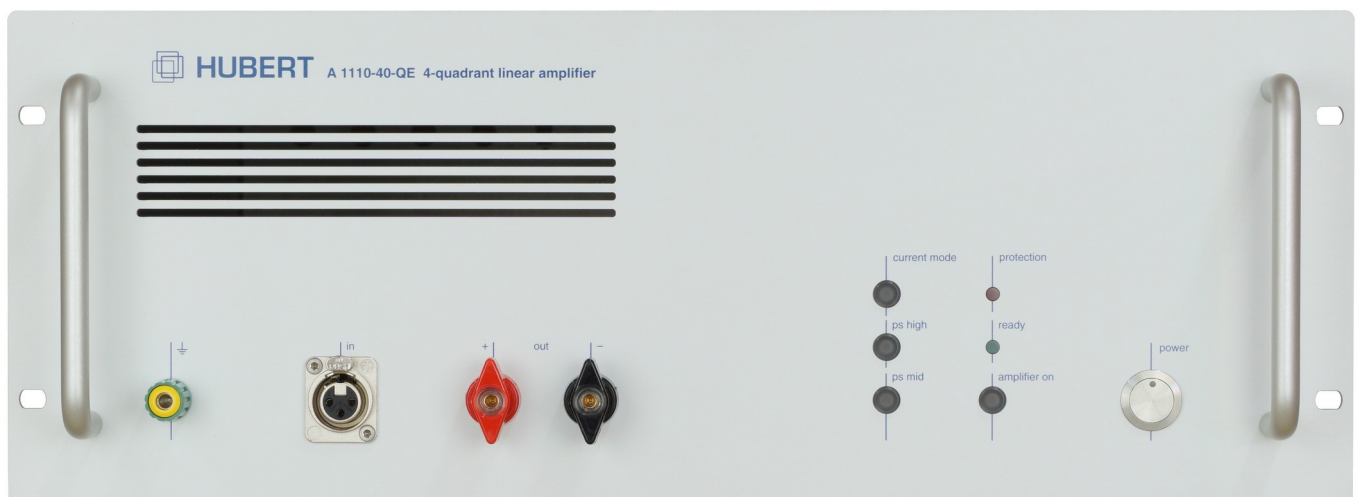

A1110-05-QE

4-Quadrant Voltage and Current Amplifier

Rev. B



Mess- und Prüftechnik. Die Experten.

**Ihr Ansprechpartner /
Your Partner:**

dataTec AG
E-Mail: info@datatec.eu
datatec.eu



1 Product Description

The A1110-05-QE is a linear, extreme-broadband, precision power amplifier designed for all applications which require fast-changing signals with high performance.

The A1110-05-QE can be operated as a voltage amplifier or current amplifier. The current amplifier offers a constant, frequency-invariant output current for inductive loads.

The amplifier is equipped with “auto-commutating” voltage supply. Three bipolar supply voltages are automatically or manually switched individually. The amplifier ensures high sink outputs and is also suitable for operation as active load. Three optional operating voltages per polarity are available for high-voltage/low-current or low-voltage/high-current applications. The voltage switch-over can be implemented optionally as manual or automatic. Especially in case of very low-impedance loads, the operating voltage can be reduced to 1/10 which is associated with a corresponding reduction of the power loss.

Output voltage and output current can be limited and observed on low-impedance signal outputs.

The device is equipped with a temperature-controlled, quietly-running fan. An over-temperature disconnection, a power-loss calculation and an absolute-current monitoring guarantees perfect short-circuit and overload protection.

An interlock offers the possibility of a remote-controlled security system.

The operation is implemented over the operating elements on the front panel and over the USB interface by PC with a graphical user interface.

The device’s functionality can even be extended by several product options.

Please find the latest release of this datasheet on our website:
www.drhubert.com

amp up your process



2 Features

- 4-quadrant voltage and current amplifier
- Fully configurable and operable by means of the supplied software
- Output voltage max. $75 V_{\text{peak}}$
- Output current max. $11 A_{\text{peak}}$
- Output current $27 A_{\text{peak}} / 500 \text{ ms}$
- Symmetrical input
- Series / parallel input connection in case of higher voltage / current requirements
- USB port as standard (LAN interface optional)
- Auto-commutating voltage supply
- Interlock
- Voltage / current monitor output
- 6 configurable compensation networks for inductive loads in current amplifier mode

3 Applications

- General lab applications for research, development and testing
- EMC testing
- Material testing
- MRI
- Component tests
- Plunger coil drives
- Piezo actuation
- Generation of magnetic fields (e.g. with Helmholtz coils)
- Medical engineering
- Laser technology
- Plasma technology



4 Control Software

The device includes an application software that ensures fully remote-controlled operation and comprehensive configuration of the amplifier via the USB interface. A trouble-free integration to existing automated test systems is guaranteed by a complete remote command list.

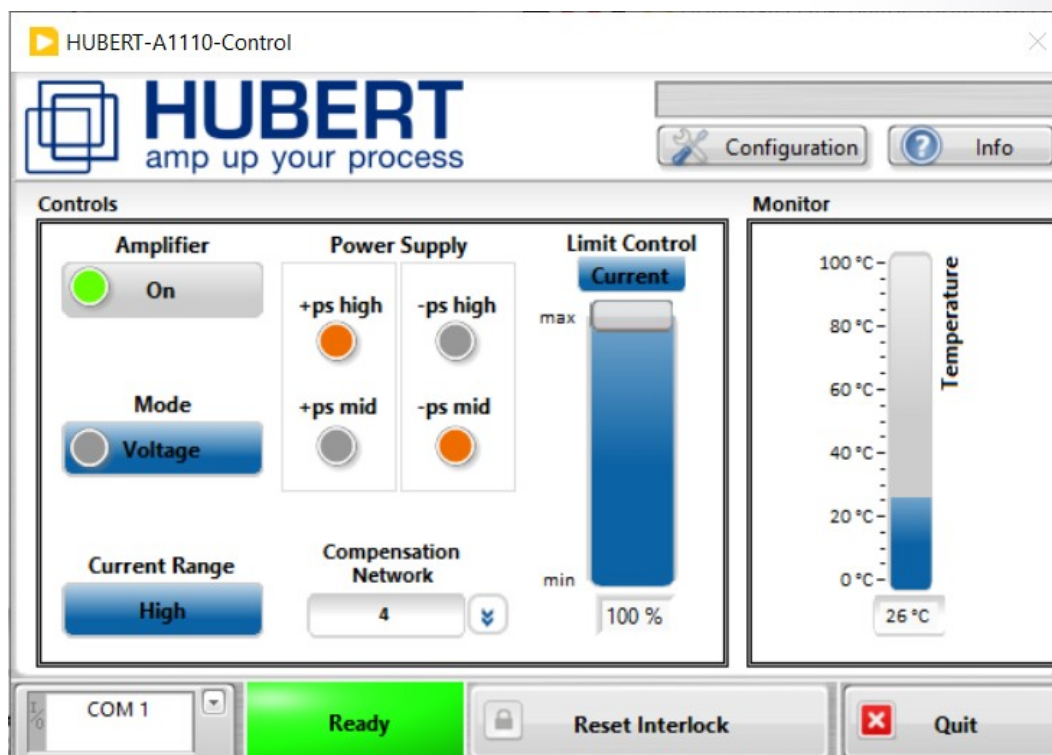


Figure 1: HUBERT-A1110-Control Main Menu

5 Pictures



Figure 2: Back Panel Elements

amp up your process



6 Current Amplifier

In current control mode, the A1110-05-QE behaves like a voltage-controlled current source and delivers a nearly frequency-independent constant load current to an inductive load.

The following five compensation networks are equipped ex works.

No	Load	Rc	Cc	Current Range
1	1 Ohm + 500 uH	100 kOhm	10 nF	high
2	0,1 Ohm + 200 uH	68 kOhm	4,7 nF	high
3	1 Ohm + 1 mH	150 kOhm	22 nF	high
4	4 Ohm + 1,8 mH	200 kOhm	1 nF	high
5	0,078 R + 88 uH	80 kOhm	6,8 nF	high
6	<i>Reserved for Option-01</i>			

Table 1: Compensation Networks

The selection is made by our HUBERT-A1110-Control software. Please also note the corresponding recommended current measuring range.

If none of the above compensation networks is suitable for your application, please order your amplifier with Option-01: Custom Current Amplifier. Our engineers will design a custom compensation network specific for your needs. Up to 6 custom compensation networks are possible as existing ones can be removed.

We would be pleased to assist you in the realization of a compensation network for your application.



7 Specifications

Parameter	Specification	Conditions/Moments
	Controlled Voltage Mode	25° C ambient temperature Continuous operation
Input Impedance	100 kOhm 200 kOhm	unbalanced, 1kHz balanced, 1kHz
Maximum Input Level	5.5 V (+14,5 dBV)	< 1 % THD, 1 kHz, 8 Ohm Load
Common-Mode Rejection Ratio	> 60 dB	Rs= 50 Ohm, 10 Hz – 200 kHz, re +34.5 dBV @ Output
Small Signal Frequency Response	DC - 200 kHz DC - 1 MHz	+0, -0.5 dB, 1 W @ 8 Ohm High Voltage Mode +0, -3.0 dB, 1 W @ 8 Ohm High Voltage Mode
Phase response	+0, -5 degrees	10 Hz - 30 kHz
Power Response (continuous)		
8 Ohm Load	400 W 380 W 200 W	DC - 30 kHz, < 1% THD Auto or High Voltage Mode DC - 100 kHz, < 1% THD Auto or High Voltage Mode DC - 200 kHz, < 1% THD Auto or High Voltage Mode
4 Ohm Load	220 W 200 W 180 W	DC - 30 kHz, < 1% THD Auto or High Voltage Mode DC - 100 kHz, < 1% THD Auto or High Voltage Mode DC - 200 kHz, < 1% THD Auto or High Voltage Mode
0.55 Ohm Load	27,5 W	DC - 200 kHz, < 1% THD Auto or High Voltage Mode
Slew Rate	80 V/μs	
Residual Noise		
10 Hz - 22 kHz	< 100 μV (< -80 dBV)	All Voltage Modes Input shorted 8 Ohm Load
10 Hz - 80 kHz	< 125.5 μV (< -78 dBV)	All Voltage Modes Input shorted 8 Ohm Load
10 Hz - 200 kHz	< 158.5 μV (< -76 dBV)	All Voltage Modes Input shorted 8 Ohm Load
Signal-to-Noise Ratio		
10 Hz - 22 kHz	< -114.5 dB	re +34.5 dBV, < 1% THD 8 Ohm Load All Voltage Modes



Parameter	Specification	Conditions/Moments
10 Hz - 80 kHz	< -112.5 dB	re +34.5 dBV, < 1% THD 8 Ohm Load All Voltage Modes
10 Hz – 200 kHz	< -108 dB	re +32 dBV, < 1% THD 8 Ohm Load All Voltage Modes
THD+N		
10 Hz – 100 kHz	< 0.15 %	380 W @ 8 Ohm; Auto
10 Hz – 100 kHz	< 0.1 %	380 W @ 8 Ohm High Voltage Mode
Output Offset	< 1.0 mV	DC
Output Impedance	< 80 mOhm	
Power, Pulse, 40ms, 20% Duty Cycle		
Peak output		
10 Ohm	80 V, 8 A	> 10 us rise time / > 10 us fall time, Auto
10 Ohm	80 V, 8 A	> 100 ns rise time / > 100 ns fall time, Uhigh
5 Ohm	52 V, 10.4 A	> 10 us rise time / > 10 us fall time, Auto
5 Ohm	52 V, 10.4 A	> 100 ns rise time / > 100 ns fall time, Uhigh
2.5 Ohm	27.5 V, 11 A	> 10 us rise time / > 10 us fall time, Auto
2.5 Ohm	27.5 V, 11 A	> 100 ns rise time / > 100 ns fall time, Umid
Short-Time Current, Pulse, 500ms, 5% Duty Cycle, unipolar		
Peak Output		
60 mOhm	+ 27 A	+Umid / -Ulow, Auto
60 mOhm	- 27 A	+Ulow / -Umid, Auto
Power, Sinus, 100Hz, continuous		
8 Ohm	57 V, 7.125 A, 406 W	< 1 % THD+N; Auto or Uhigh
0.25 Ohm	1.9 V, 7.6 A, 14.4 W	< 1 % THD+N; Auto
Power, DC		
10 Ohm	72V, 7.2A, 518 W	Auto or Uhigh
5 Ohm	47 V, 9.4 A, 442 W	Auto or Uhigh
2 Ohm	22 V, 11 A, 242 W	Auto or Umid
0.25 Ohm	2.7 V, 10.8 A, 29.2 W	Auto
Sink Power, DC	300 W	see U/I-Plot
Voltage Monitor	$\pm 100 \text{ mV} \triangleq 1 \text{ V} \pm 0.5\%$	
Current Monitor	High Current Range: $\pm 400 \text{ mV} \triangleq 1 \text{ A} \pm 1\%$	Shunt = 10 mOhm



Parameter	Specification	Conditions/Moments
	Low Current Range: $\pm 1 \text{ V} \triangleq 100 \text{ mA} \pm 1 \%$	Shunt = 2.5 Ohm
Gain		
Controlled Voltage Mode	1 V / 10 V	Uin / Uout
Controlled Current Mode	High Current Range: 1 V / 3 A Low Current Range: n.a.	Uin / Iout unspecified
Physical Characteristics		
AC Power	230 VAC / 50 Hz	
Remote control	USB Ethernet (Option)	
Operating Temperature	10 °C to 55 °C	
Humidity	80% or less	non-condensing
Cooling	Forced air	
Dimensions (W x H x D)	449 x 133 x 495.5 mm	
Weight	Approx. 25 kg	

The A1110-5-QE is equipped with three operating voltages and the two auto and manual operating modes.


Modus	+Operating Voltage	-Operating Voltage
Auto	10 V, 45 V, 90 V	-10 V, -45 V, -90 V
Manuell: + Umid	45 V	auto
Manuell: + Uhigh	90 V	auto
Manuell: - Umid	auto	-45 V
Manuell: - Uhigh	auto	-90 V
Manuell: + Umid, -Umid	45 V	-45 V
Manuell: + Uhigh, -Umid	90 V	-45 V
Manuell: + Uhigh, -Uhigh	90 V	-90 V
Manuell: + Umid, -Uhigh	45 V	-90 V

In auto mode the operating voltage is automatically switched on the basis of the signal amplitude. This mode is suitable for real-time applications with DC voltages and sine-wave signals, with which high sink power is required at inductive loads.




7.1 Output Voltage vs. Frequency (THD + N < 1%)

Red: @ 8 Ohm
Blue: @ 4 Ohm
Green: @ 2 Ohm

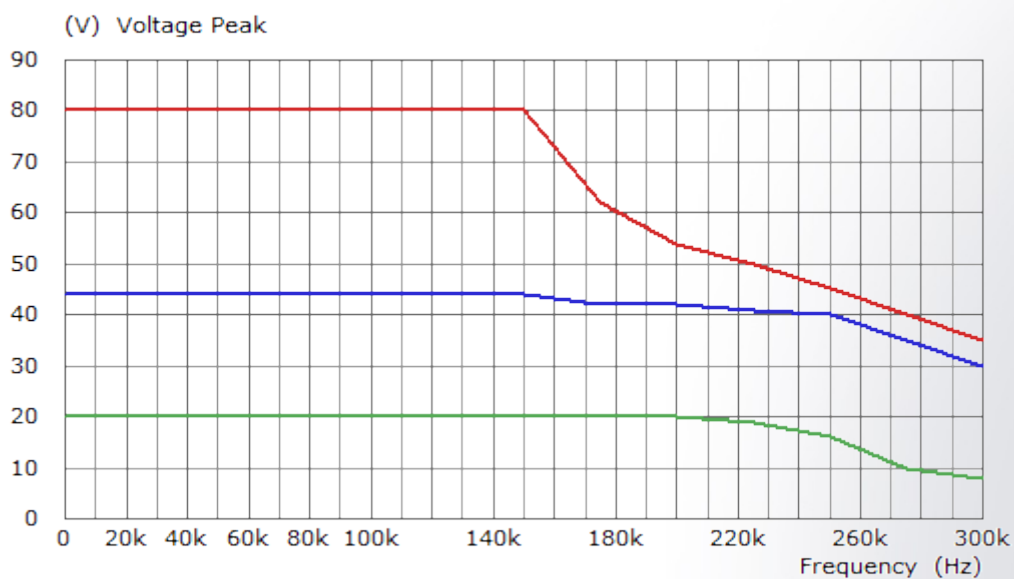

7.2 Output Current vs. Output Voltage (THD + N < 1%)


Supply Voltage: Auto
Blue: AC Limit
Red: DC Limit

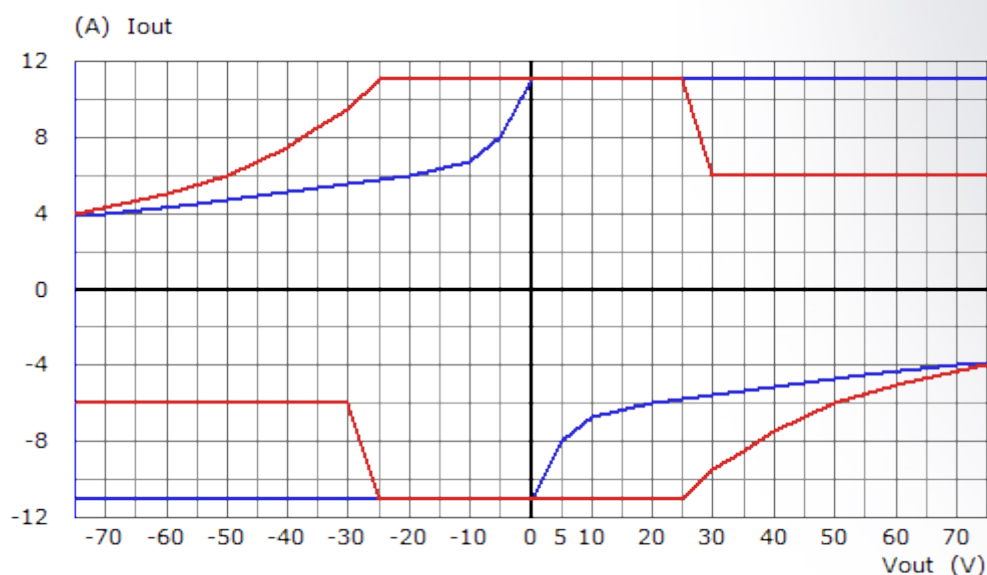

amp up your process




7.3 Square Wave at 100 kHz and 10 Ohm Load

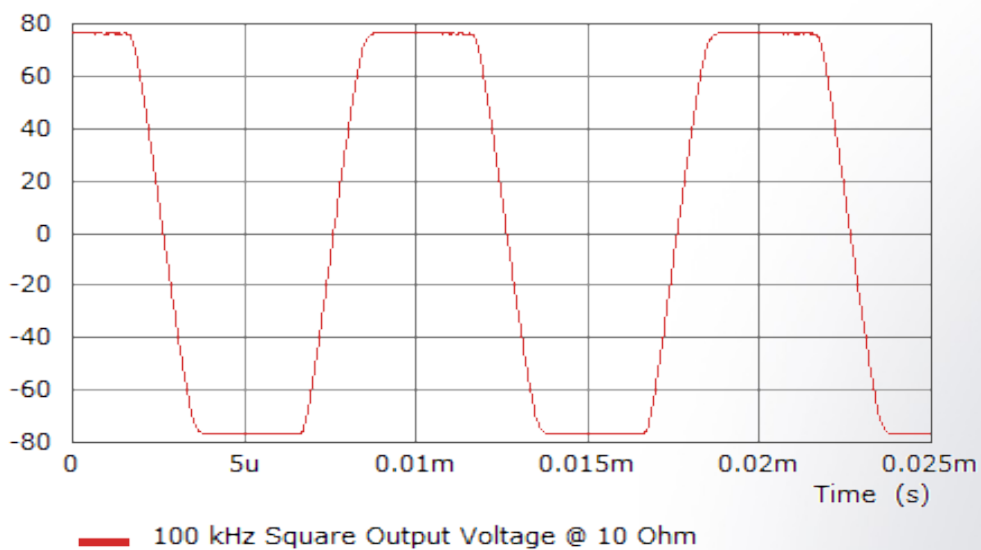

7.4 Power Bandwidth at 8 Ohm Load

Input level normalised to max. output level at 30 kHz; THD+N < 1%

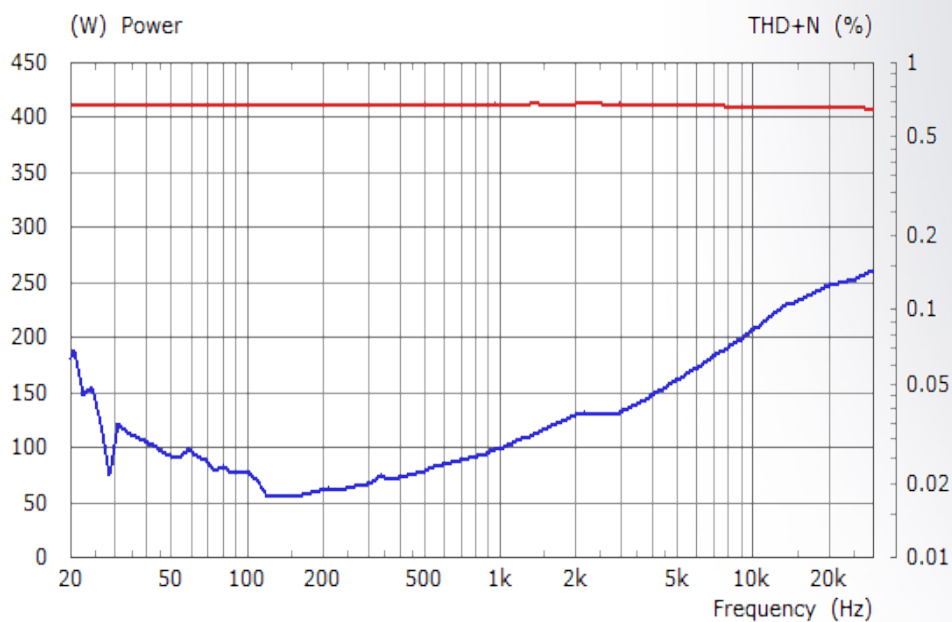


amp up your process




7.5 Power Bandwidth at 8 Ohm Load

Input level normalized to max. output level at 200 kHz; THD+N < 1%

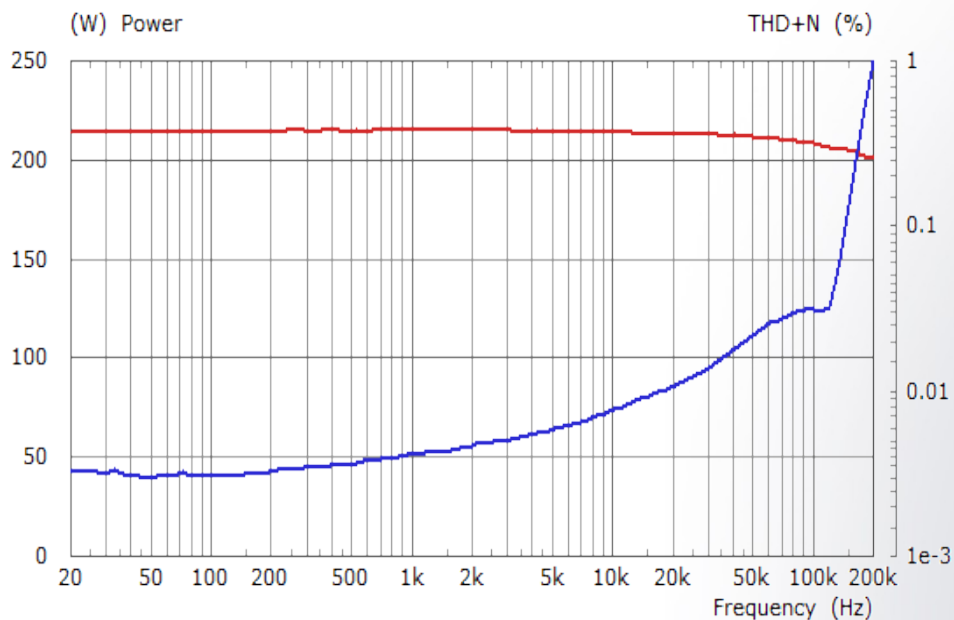

7.6 Power Bandwidth at 4 Ohm Load

Input level normalised to max. output level at 100 kHz; THD+N < 1%

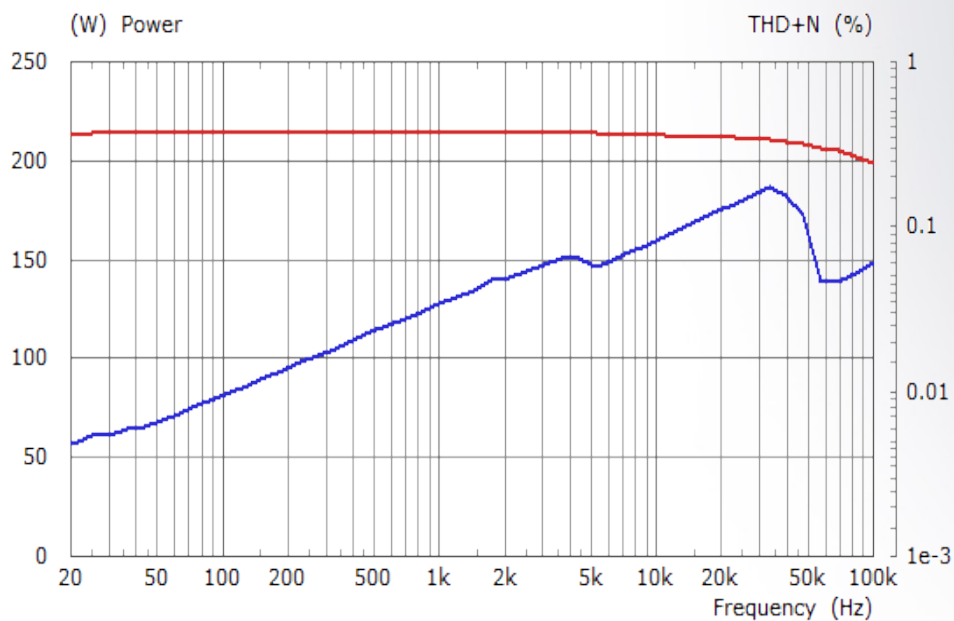


amp up your process



7.7 Current Pulse


27 A/500 ms, 10us rise-/fall time, auto

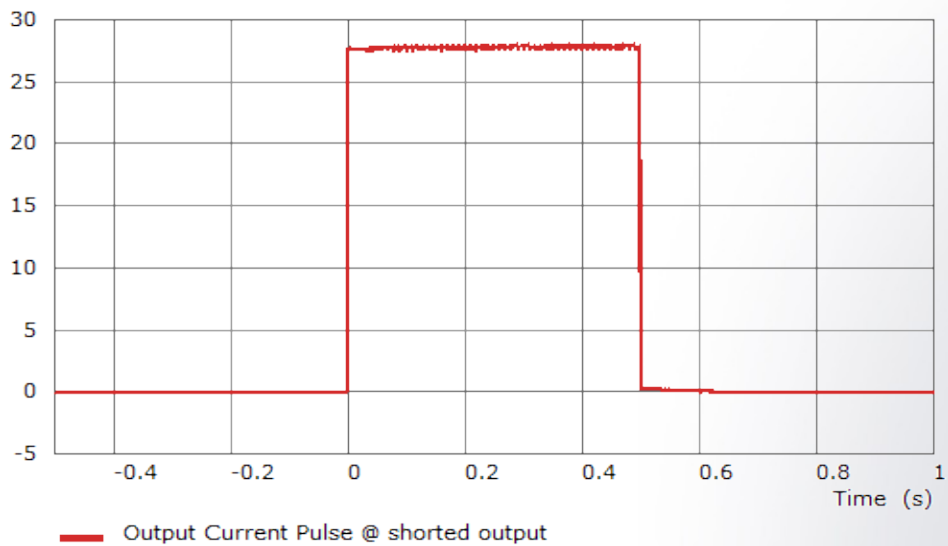

amp up your process



8 Block Diagram

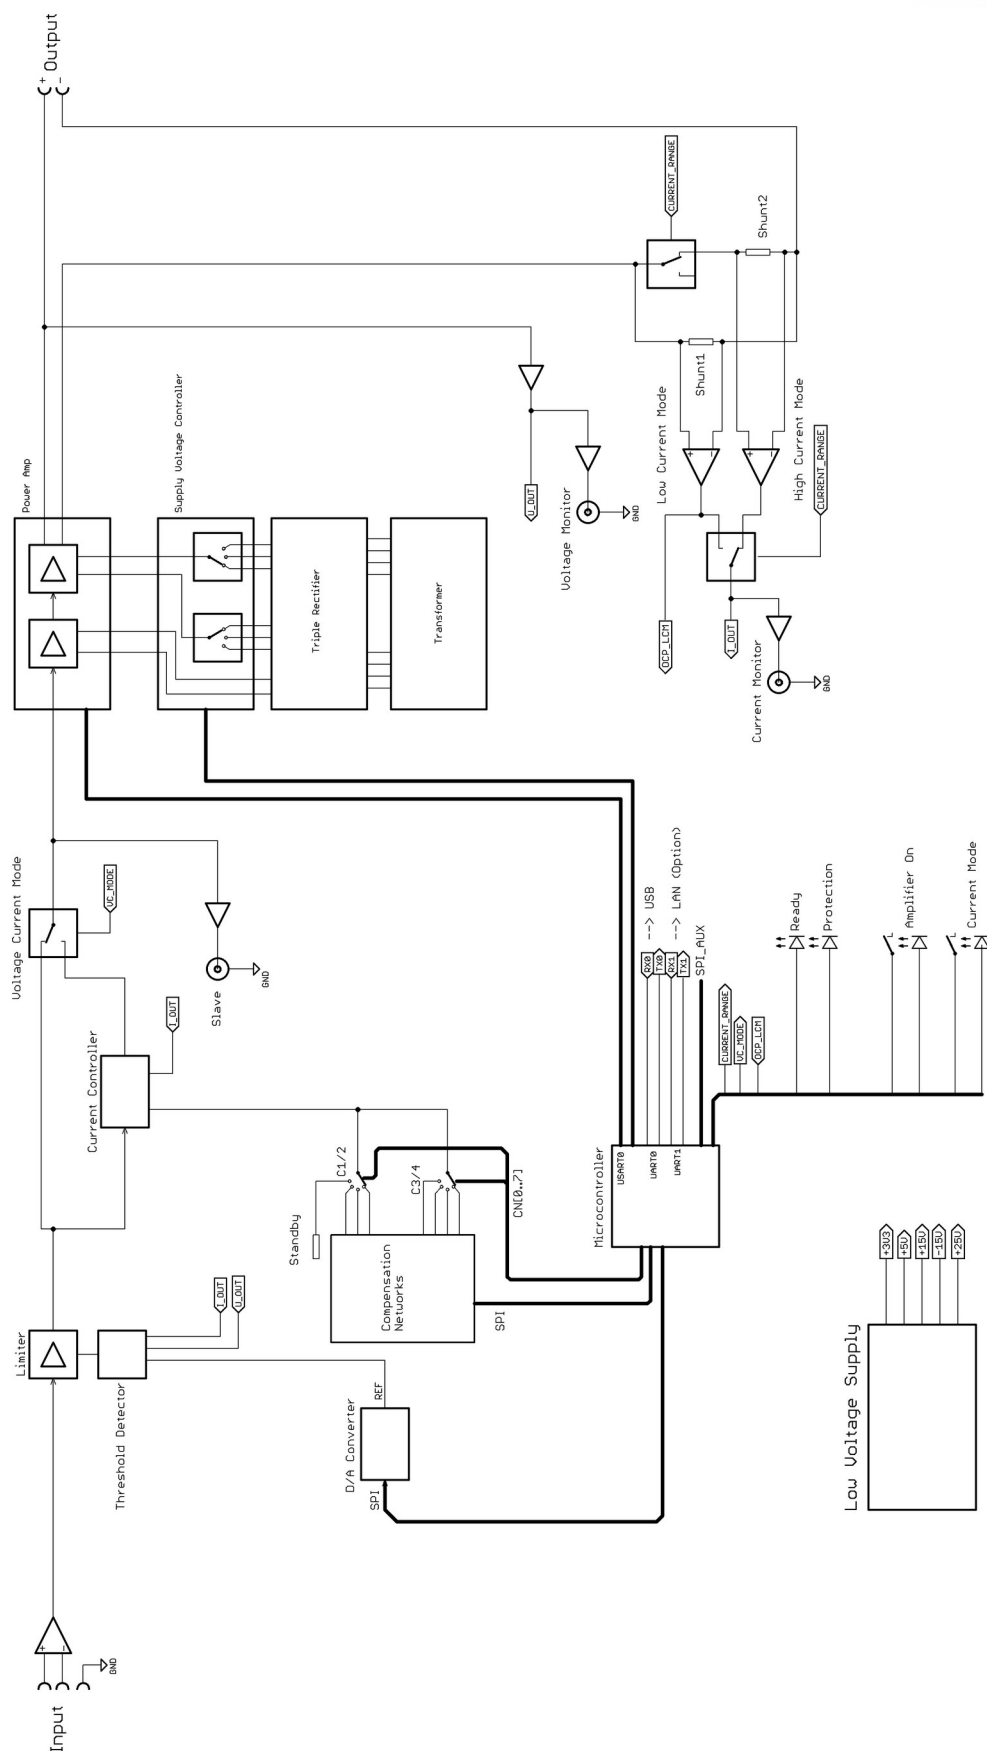

amp up your process



9 Product Options

The following product options are available at the time of placing the order. Upgrades of existing devices are not possible.

Article Name	Article Description
A1110-05-QE	4-Quadrant Voltage and Current Amplifier
Included: Sensing	Adjustable voltage drop: 500 mV / 1V / 2V
Included: Ethernet Interface	For connection to a computer (RJ45)
Included: Adjustable Output Resistance	R: 0 m Ω – 200 m Ω ; Resolution 1 m Ω ; Accuracy 0.5%
Option: Custom Current Amplifier	Additional compensation network for one specified load. The device is equipped with five general-purpose networks by default.
Option: 3-Channel Isolation Amplifier	For potential isolation of input and output
Option: Overvoltage Protection	For protection of amplifier outputs

amp up your process



10 Contact

Dr. Hubert GmbH
Dietrich-Benking-Str. 41
44805 Bochum

www.drhubert.com
[+49 234 970569-0](tel:+492349705690)



Mess- und Prüftechnik. Die Experten.

**Ihr Ansprechpartner /
Your Partner:**

dataTec AG
E-Mail: info@datatec.eu
datatec.eu

amp up your process



11 Document History

Version	Date	Changelog
1	June 2015	First publication for Revision B

amp up your process



**Ihr Ansprechpartner /
Your Partner:**

dataTec AG
E-Mail: info@datatec.eu
datatec.eu

Mess- und Prüftechnik. Die Experten.